



Wynn Marine Ltd.

2-4 Merse Road, North Moons Moat, Redditch, Worcestershire B98 9HL

Tel: +44 (0) 1527 61243, Fax: +44 (0) 1527 66836

Email: sales@wynn.co.uk Website: <http://www.wynn.co.uk>

Installation & Operation Manual

Type C Straight Line Wiper

With

Series 1000 Control Unit

Type C Wiper Description and Specification

The 'Type C' is a Heavy Duty Straight Line Wiper with an electric motor mounted internally. The wiper can be mounted either above or below the window. The motor can be positioned at either end simply by reversing the front cover of the wiper case.

All electric motors incorporate a worm reduction gearbox. Windings are to Class F insulation.

The DC motor option is suitable for either single or variable speed operation. Complies with the EMC Directive according to the following: EN50081-1 & EN 50082-1.

The AC 1-phase motor option is single speed operation. A thermal cut out is fitted that will disconnect the windings from power in the case of over temperature. The switch will reset itself when the motor has cooled down. Complies with the requirements of the LVD and EMC directives to the following: EN 55014, EN 60555, EN 50081-1, EN 50082-1 and EN 60335-1:1990.

The AC 3-phase motor option is for either 1 or 2 speed operation. Complies with LVD and EMC directives according to the following: EN 55014, EN 60555, EN 50081-1, EN 50082-1 and EN 60335-1:1990

Motor Specifications

| Motor | Type | Nominal Voltage | Full load current at 50/60 Hz | Fusing Value 50/60 Hz | Speed | Compass Safe Distance | Protection Rating |
|----------|-------------------|-----------------|-------------------------------|-----------------------|-------------|-----------------------|-------------------|
| PM3M | permanent magnet | 24V DC | 4.5 A | 6.0 A | 1.4 m/s | 2.4 m | IP54 |
| PM3M (L) | permanent magnet | 24V DC | 4.5 A | 6.0 A | 0.7 m/s | 2.4 m | IP54 |
| PM5M | permanent magnet | 24V DC | 7.1 A | 10.0 A | 1.4 m/s | 3.0 m | IP54 |
| PARV 69 | 1 Phase induction | 100 V | 1.9/2.1 A | 2.5/3.15 A | 1.6 m/s | 0.5 m | IP20 |
| PARV 65 | 1 Phase induction | 115 V | 2.3/2.6 A | 2.5/3.15 A | 1.4 m/s | 0.5 m | IP20 |
| PARV 65L | 1 Phase induction | 115 V | 1.5/1.6 A | 2.0/3.15 A | 0.7 m/s | 0.5 m | IP20 |
| PARV 64 | 1 Phase induction | 230 V | 0.9/1.3 A | 1.6/2.0 A | 1.4 m/s | 0.5 m | IP20 |
| PARV 64L | 1 Phase induction | 230 V | 0.75/0.95 A | 1.0/1.6 A | 0.7 m/s | 0.5 m | IP20 |
| PARV 61 | 3 Phase Induction | 115V AC | 1.3 / 1.1 A | 2.0 / 1.6 A | 0.7/1.4 m/s | 0.5 m | IP20 |
| PARV 62D | 3 Phase Induction | 220V AC | 0.6 / 0.5 A | 1.0 / 1.0 A | 0.7/1.4 m/s | 0.5 m | IP20 |

For protection it is recommended that the wiper system have fuses fitted. The fuses will not blow in normal conditions, however if the wiper is jammed, then the fuses are designed to blow before the motor is damaged. Each wiper requires its own fuse. Fuse values shown above.

Compass safe distances, BSH (Germany) certified, have the values shown above. The distance quoted is the maximum figure for 'Magnet-Regelkompass'.

Drive shaft lengths are optional. The standard length is 84 mm. Other lengths available are 35mm, 140mm, 200mm and 220mm. The Certificate of Conformity will advise which option has been fitted.

Spray nozzles & water connections.

A fresh water supply can be plumbed directly to the wiper into a 6mm overall diameter compression fitting. On stroke lengths below 1015mm, 1 nozzle is fitted, above 1015mm, 2 nozzles are fitted at ¼ stroke + 137mm from either end. The installer needs to provide pressurised water supply and the interconnecting plumbing. When the wash option is installed, the maximum pressure for the system is 8 bar or 118 PSI and the minimum pressure for adequate spray reach is 1 bar or 15 PSI. Example flow rates for a single spray jet are shown below.

Water System Pressure And Flow Rates

| Pressure | | Flow rate | |
|----------|-----|------------|-------------|
| Bar | Psi | Litres/min | Gallons/min |
| 1.0 | 15 | 0.95 | 0.20 |
| 1.5 | 22 | 1.20 | 0.25 |
| 2.0 | 29 | 1.40 | 0.30 |
| 3.0 | 44 | 1.75 | 0.40 |

De-icing Heaters

Optional de -icing heaters may be fitted inside the wiper case to ensure effective operation in cold conditions. Standard cable length is 2M. Optional lengths are 5M, 10M, 15M and 20M. Power consumption is according to the wiper stroke length, shown below.

Heater Power Ratings

| STROKE (mm) | STROKE (inch) | HEATER SIZE | WATTS (24VDC) | STROKE (mm) | STROKE (inch) | HEATER SIZE | WATTS (24VDC) |
|----------------|------------------|-------------|------------------|----------------|------------------|----------------|------------------|
| 305 | 12 | 1 | 97 | 965 | 38 | 5 | 256 |
| 330 | 13 | 1 | 97 | 990 | 39 | 5 | 256 |
| 356 | 14 | 1 | 97 | 1015 | 40 | 5 | 256 |
| 380 | 15 | 1 | 97 | 1040 | 41 | 5 | 256 |
| 407 | 16 | 1 | 97 | 1065 | 42 | 5 | 256 |
| 430 | 17 | 1 | 97 | 1095 | 43 | 6 | 301(238) |
| 457 | 18 | 2 | 135 | 1118 | 44 | 6 | 301(238) |
| 480 | 19 | 2 | 135 | 1145 | 45 | 6 | 301(238) |
| 510 | 20 | 2 | 135 | 1195 | 47 | 6 | 301(238) |
| 533 | 21 | 2 | 135 | 1205 | 47 | 6 | 301(238) |
| 558 | 22 | 2 | 135 | 1245 | 49 | 6 | 301(238) |
| 585 | 23 | 2 | 135 | 1295 | 51 | 7 | 345(208) |
| 610 | 24 | 3 | 173 | 1335 | 53 | 7 | 345(208) |
| 635 | 25 | 3 | 173 | 1400 | 55 | 7 | 345(208) |
| 660 | 26 | 3 | 173 | 1450 | 57 | 7 | 345(208) |
| 685 | 27 | 3 | 173 | 1500 | 59 | 8 | 390(186) |
| 710 | 28 | 2 | 173 | 1560 | 61 | 8 | 390(186) |
| 735 | 29 | 3 | 173 | 1605 | 63 | 8 | 390(186) |
| 760 | 30 | 4 | 211 | 1700 | 67 | 9 | 440(175) |
| 787 | 31 | 4 | 211 | 1800 | 71 | 9 | 440(175) |
| 810 | 32 | 4 | 211 | 1930 | 76 | 10 | 485(150) |
| 840 | 33 | 4 | 211 | 1985 | 78 | 10 | 485(150) |
| 865 | 34 | 4 | 211 | 2005 | 79 | 10 | 485(150) |
| 890 | 35 | 4 | 211 | 2100 | 83 | 11 | 530(133) |
| 915 | 36 | 5 | 256 | 2260 | 89 | 12 | 574(123) |
| 940 | 37 | 5 | 256 | | | | |

Quoted Power is for nominal 115 or 230 Volts (bracketed values are for 24 Volts). For stroke lengths up to 1065 mm, power ratings are the same for all voltages.

Type C Wiper Installation



CAUTION: Ensure that the correct wiper, blade and arms are selected for each window.

CAUTION: Before drilling, ensure that there are no obstructions / hazards at the chosen mounting position. The main frame should be mounted on a flat surface that will not bend or twist the casing, as this will prevent correct operation of the wiper.

CAUTION: Where more than one wiper unit is to be mounted close together, allow a distance of 70mm minimum between the wiper units.

1. Locate the self-adhesive template in the correct mounting position on the outside of bulkhead
NOTE: For motors mounted at the opposite end, the template should be inverted.
2. Drill the wiper 2 off fixing holes (11 mm diameter) and the drive shaft housing hole (57mm diameter).
3. Hold the wiper casing in the required position and mark-out the remaining fixing holes, or calculate their position from the drawing i.e. stroke length plus 266 mm.
4. Drill the remaining wiper fixing & cable holes for the heater and park sensor, ensuring that all holes are circular and carefully de-burred. For locations see Park Switch Cable Entry Locations drawing. Treat bare metal to prevent corrosion.
5. Fit the wiper case into position and secure with M10 bolts. Ensure that the bolts are sealed where they pass through the bulkhead.
6. Push the drive shaft seals into place. It is advisable to use a suitable sealant to prevent water ingress.
7. Using the supplied M6 x 10mm screws, secure the blade arm to the carriage plate.



CAUTION: Ensure the correct length screws are used, as supplied. Longer screws will cause the carriage assembly to jam.


8. Bolt the front case to the back case using the 2 off M8 bolts fitted.
9. If necessary, slacken the screws on the blade attachment clip, move the blade up or down for optimum position and then retighten screws.
10. Move the blade assembly over its full stroke and check that there is no restriction to movement (the motor will offer some resistance, but should not jam the wiper). Investigate and rectify any restrictions. If necessary adjust the blade up or down on the arm to avoid the window frame.
11. Pass the cables through the bulkhead, leaving sufficient spare cable to allow the front assembly to be lifted away from the rear case during the maintenance period. Ensure the wiper is correctly earthed.
NOTE: If a heater is fitted pass the heater cable through the bulkhead, leaving a loop as required, and seal.
12. Ensure that wherever the cable passes through the bulkhead a suitable cable gland or seal is used to prevent water ingress and cable chaffing.
13. Fit the motor to the drive shaft.

3 – Phase AC motors


Correct phasing of 3 Phase motors is essential for operation of the wiper in the same direction at both high and low speeds. Connect as per the table below.

| Motor Termination | Function | Notes |
|-------------------|------------------|---|
| A3 | High Speed | For Low speed operation, connect together and isolate |
| B3 | High Speed | |
| C3 | High Speed | |
| A2 | Low Speed | Not connected when in high speed |
| B2 | Low Speed | |
| C2 | Low Speed | |
| EARTH | Protective Earth | Must be connected for safety |


Type C Single Common Cover Installation Drawing.

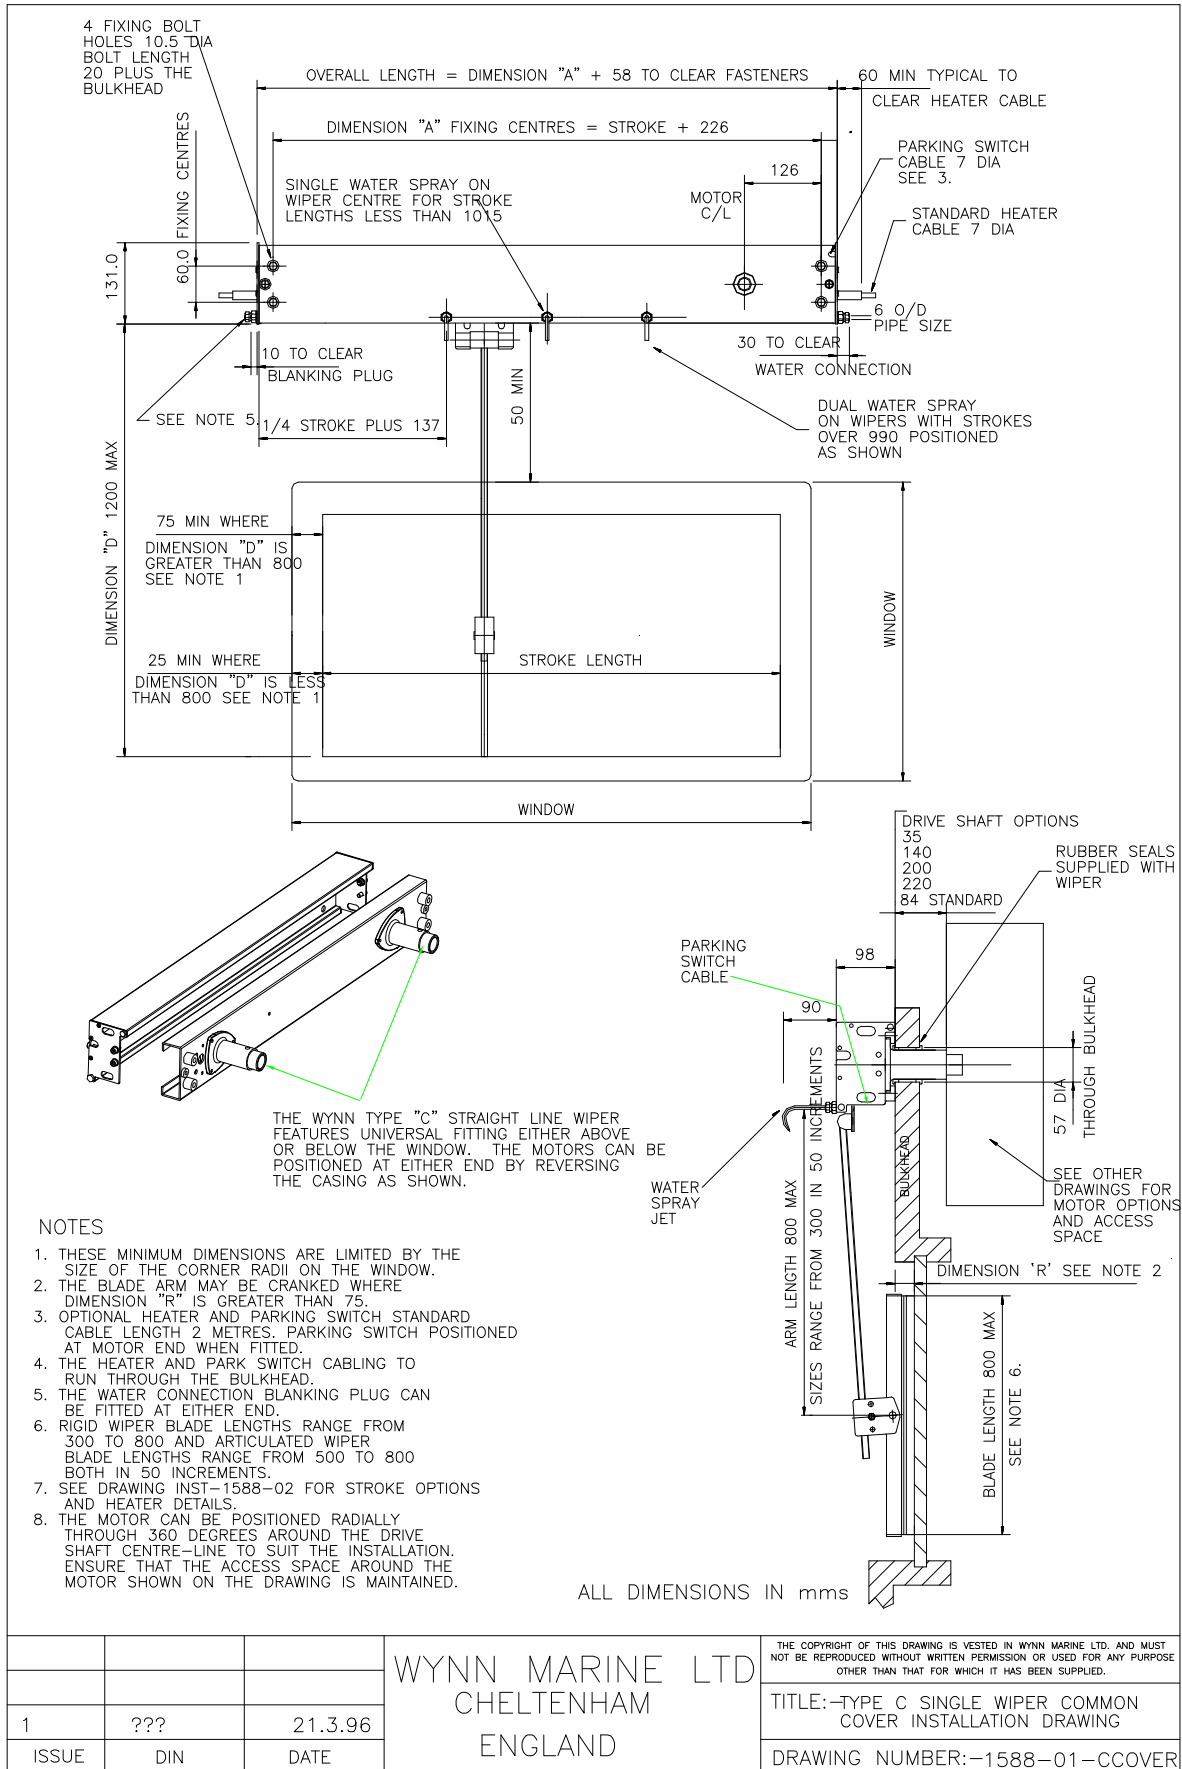

Type C Twin Common Cover Installation Drawing.

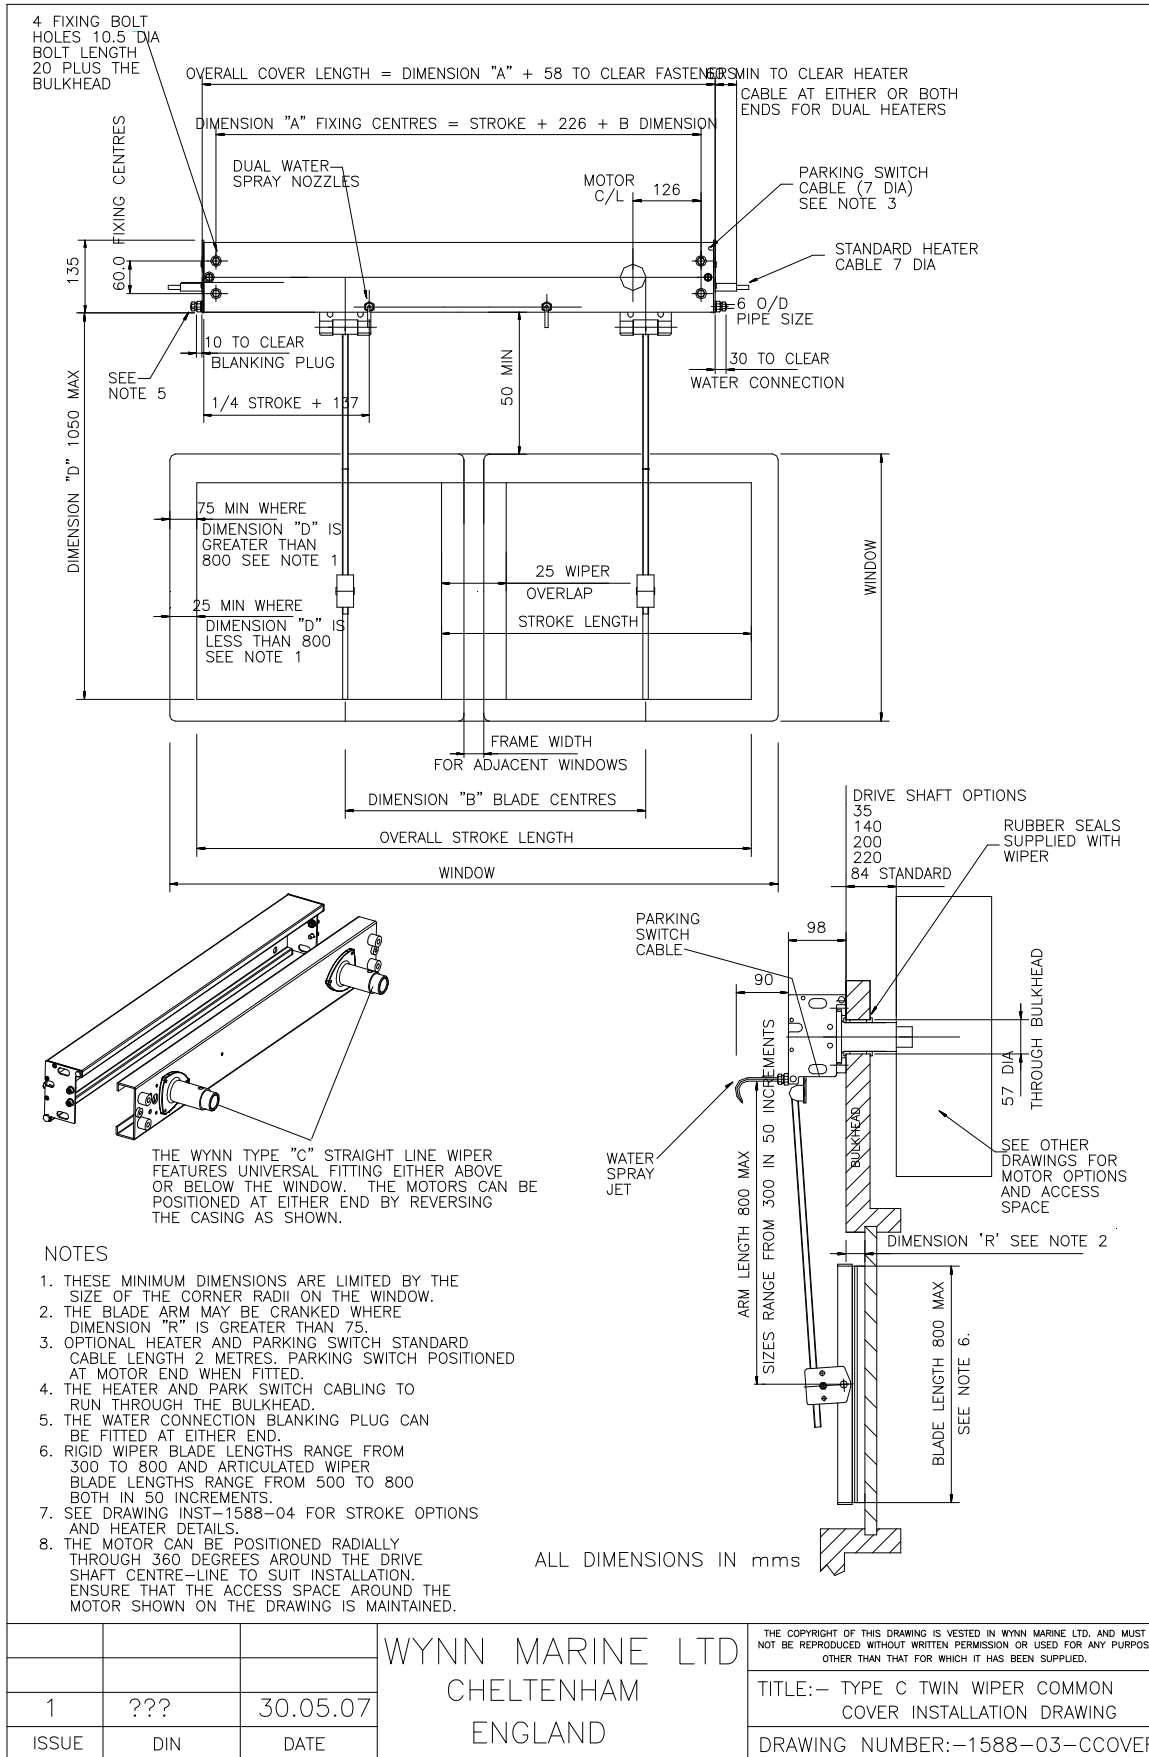

DC Motor Dimensions

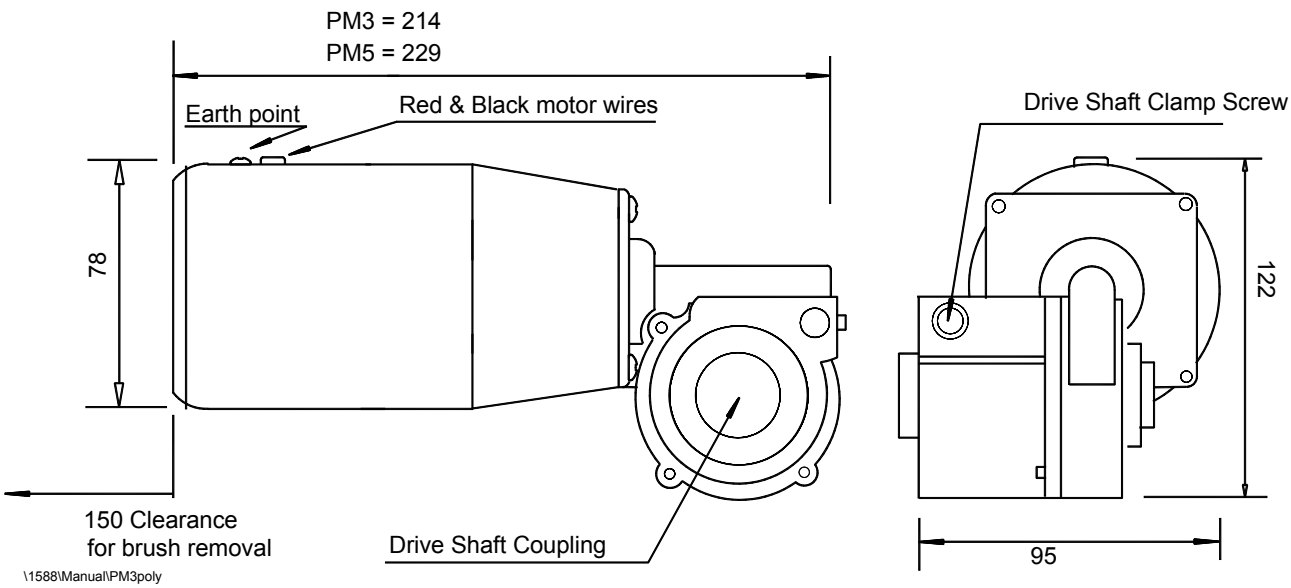

CLAMP CAPACITOR TO
MOTOR AS SHOWN

FEED CAPACITOR LEADS
INTO TERMINAL BOX
THROUGH GROMMET AS SHOWN

MOTOR DETAILS

VOLTAGE 230 V AC
FREQUENCY 50/60 hz
PHASE 1 ph
FULL LOAD CURRENT @ 50hz 0.9amps
FULL LOAD CURRENT @ 60hz 1.3amps

THERMAL CUT-OUT TEMPERATURE 140°C
MOTOR TO BE SUPPLIED WITH 7mfd -440V AC CAPACITOR
WITH M8 THREADED STUD AND MOTOR/CAPACITOR CLIP
CABLE LENGTH OF CAPACITOR TO BE 450MM
ABOVE ITEMS TO BE PACKAGED IN THE SAME BOX


GEARBOX OUTPUT

270rpm @ 230v 50hz
324rpm @ 230V 60hz
RATIO 10 1/3:1

TORQUE

2.5NM CONTINUOUS
2.7NM START

CABLES TO EXIT THROUGH
CABLE GLAND 450MM LONG

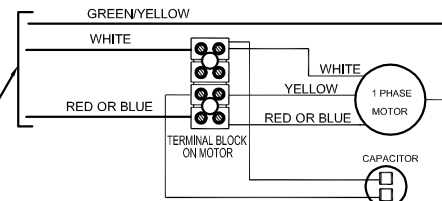

FLYING LEAD
CABLE LENGTH
450 MINIMUM

PG13.5 THREAD

218

CABLE GLAND

10.5 FLAT ON SHAFT

DIRECTION
OF
ROTATION

SHAFT Ø12.00

4 HOLES M5 THREAD

CABLE COLOURS & MARKING

RED 1 AC LIVE (FROM CUT OUT)
WHITE 2 AC NEUTRAL (MOTOR MAIN)
YELLOW (MOTOR AUXILIARY)
GREEN/YELLOW MOTOR INTERNAL BONDING POINT

IDENTS TO BE ON CABLES BOTH SIDES OF THE
TERMINAL BLOCK AND POSITIONED NEAR FREE END OF
THE FLYING LEADS.

SECTION THROUGH COUPLING

COUPLING ITEM 2 TO BE ASSEMBLED TO MOTOR
OUTPUT SHAFT WITH THE INNER FACE OF THE COUPLING
FLUSH WITH THE END OF THE MOTOR SHAFT AND FIX IN
PLACE WITH THE SOCKET SET SCREW AND LOCTITE ITEM 4

LENGTH OF FLAT 12 MIN

15.5

58.7

Ø 96

34.9

69

| | | | |
|------|-----------------------|-----|-------------|
| 9 | | | |
| 8 | | | |
| 7 | | | |
| 6 | Screw Cp Hd M6x55 s/s | 1 | #A0006-055S |
| 5 | Cotter Pin | 1 | 1279-053 |
| 4 | Loctite 290 | A/R | |
| 3 | Mounting Boss | 1 | 1279-052 |
| 2 | Drive Coupling | 1 | 1279-416 |
| 1 | Motor & Gearbox | 1 | PARVALUX |
| Item | Description | QTY | Part No. |

CAD FILENAME+DIRECTORY M:\DRAW\1490-PARV-64

3rd ANGLE PRO.

TOLERANCES UNLESS OTHERWISE STATED
DECIMAL DIMS. TO 2 PLACES ± 0.1mm.
DECIMAL DIMS. TO 1 PLACE ± 0.25mm
NO DECIMAL PLACES ± 0.5mm
ANGLES ± 1°

MAT'L:

FINISH:-

| | | | | | | | | | |
|------|-----|------|------|-----|------|------|-----|------|----------|
| | | | | | | | 6 | 130 | 16.10.06 |
| | | | | | | | 5 | 112 | 31.07.06 |
| | | | | | | | 4 | 084 | 18.05.06 |
| | | | | | | | 3 | 026 | 24.02.06 |
| | | | | | | | 2 | 017 | 03.02.06 |
| | | | | | | | 1 | 593 | 8.11.05 |
| ISS. | DIN | DATE | ISS. | DIN | DATE | ISS. | DIN | DATE | |

SCALE:-

DRAWN:- DD

CHKD:-

CHANGED:- DD

USED ON;

THE COPYRIGHT OF THIS DRAWING IS VESTED IN WYNN MARINE LTD. AND MUST
NOT BE REPRODUCED WITHOUT THE WRITTEN PERMISSION OF THE COMPANY OR USED
FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT HAS BEEN SUPPLIED.


Wynn MARINE LIMITED
CHELTENHAM ENGLAND

TITLE:-
MOTOR AC 230V 1 PHASE


DRAWING No. 1490-PARV-64

Type C Wiper Park Switch Cable Entry Position

Right Position Viewed from Outside

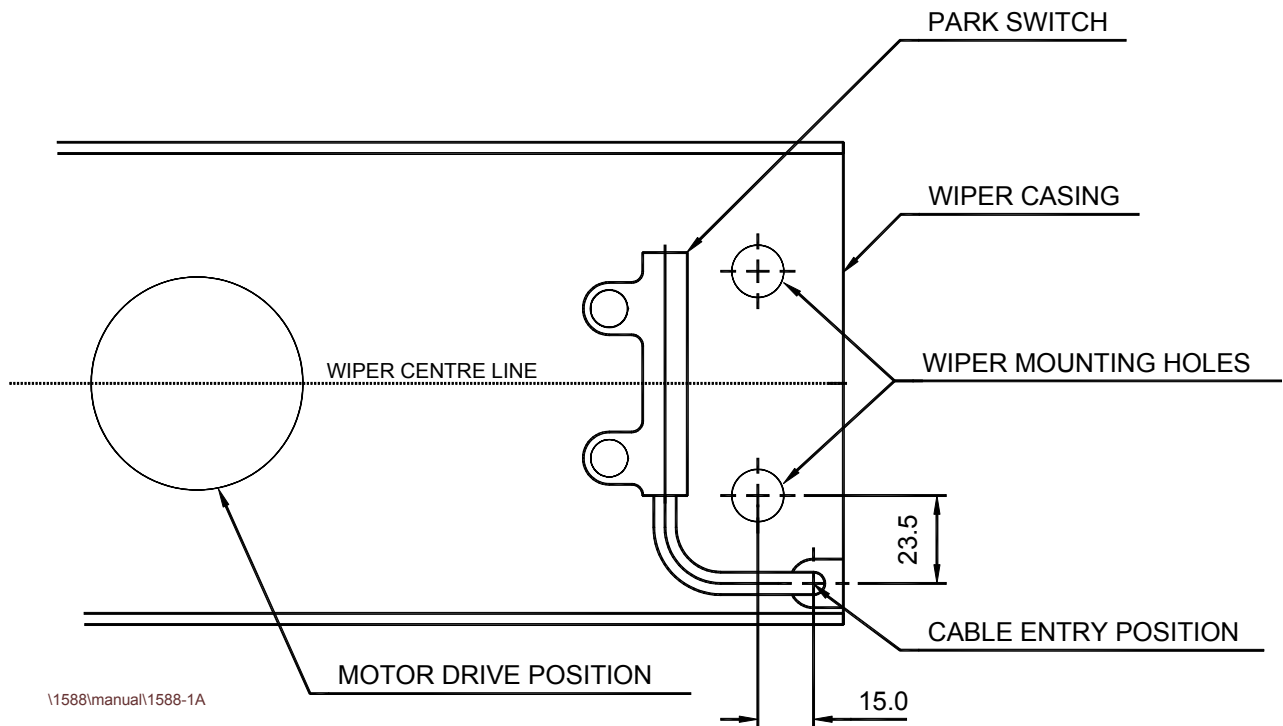

Left Position Viewed from Outside

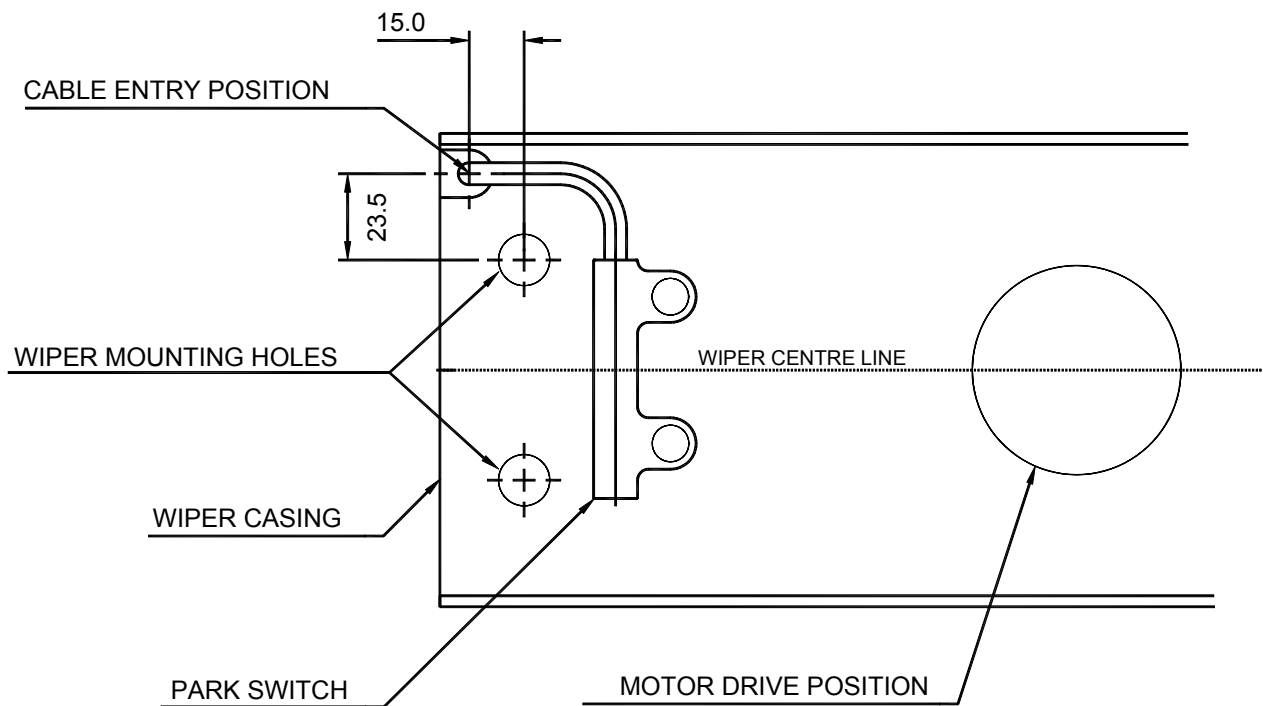

Series 1000 Control Unit

Series 1000 controllers are available in units from 1 – 4 ways. They allow direct connection to the wiper motor without the need for intermediate power supplies. Wipers are controlled in continuous or variable intermittent modes. Switches are fitted for Spray and Heater control. A park sensor allows the wiper to park at the motor end when it reaches the end of stroke.

The system complies with all relevant safety and EMC regulations.

Installation of Controller



Installation of the control unit and wiper must be done by a competent electrician.

1. Cut out and de-burr a hole in the console, relevant to the sizes shown in the table below.

| Controller Type | Panel cut out (mm) | Overall size (mm) |
|-----------------|--------------------|-------------------|
| 1-way | 45 x 91 | 48 x 96 |
| 2-way | 91 x 91 | 96 x 96 |
| 3-way | 139 x 91 | 144 x 96 |
| 4-way | 186 x 91 | 192 x 96 |

2. Remove the 2 fixing brackets from the side of the controller case, noting how these fit.
3. Fit the unit into the mounting hole and secure with the fixing brackets.
4. Connect the wiring as shown in the wiring diagram.

Functional Check of Controller

The wiper switch has 6 positions. Fully anti-clockwise parks the wiper, next are four settings are for Intermittent wipe and finally continuous speed operation when turned fully clockwise.

1. Set wiper switch to the off position (fully anti-clockwise) & apply power to the system. Check each wiper switch in turn as follows.
2. Turn wiper switch fully clockwise. The wiper should start and run continuously.
3. Turn the wiper switch fully anticlockwise. The wiper should park at the motor end of its stroke.
4. Turn the wiper switch clockwise one position. The wiper will make one wipe and park again. This position gives the longest intermittent time (20 seconds).
5. Turn the wiper switch clockwise one position at a time. Each time the switch is turned the wiper should wipe once and park again. At the last position, just before fully clockwise, the intermittent interval should be around 4 seconds.
6. Heater. Switch on and ensure that the wipers begin to heat up.
7. Wash. Switch on and hold down, ensure water is sprayed through the system.
8. Multi-way grouped controllers with only one control switch has all the wipers operating together.

Fusing




Remove power prior to working on controller.

The controller has fuses to protect the motor, wiring and controller. The fuses will not blow in normal use, however, if the wiper is jammed, then these fuses are designed to blow before the motor will sustain any damage. The fuses are located behind the front panel inside the control unit. To replace a fuse:


1. Use a small screwdriver to carefully lever off the front panel bezel.
2. Holding the control knob, carefully pull out the controller front panel.
3. Undo the fuse holder which is located at the bottom right of the relevant controller PCB.
4. Renew the fuse and carefully refit the fuse holder. Avoid excessive force. Refit front panel and bezel.

Series 1000 Controller Single Way Dimensions

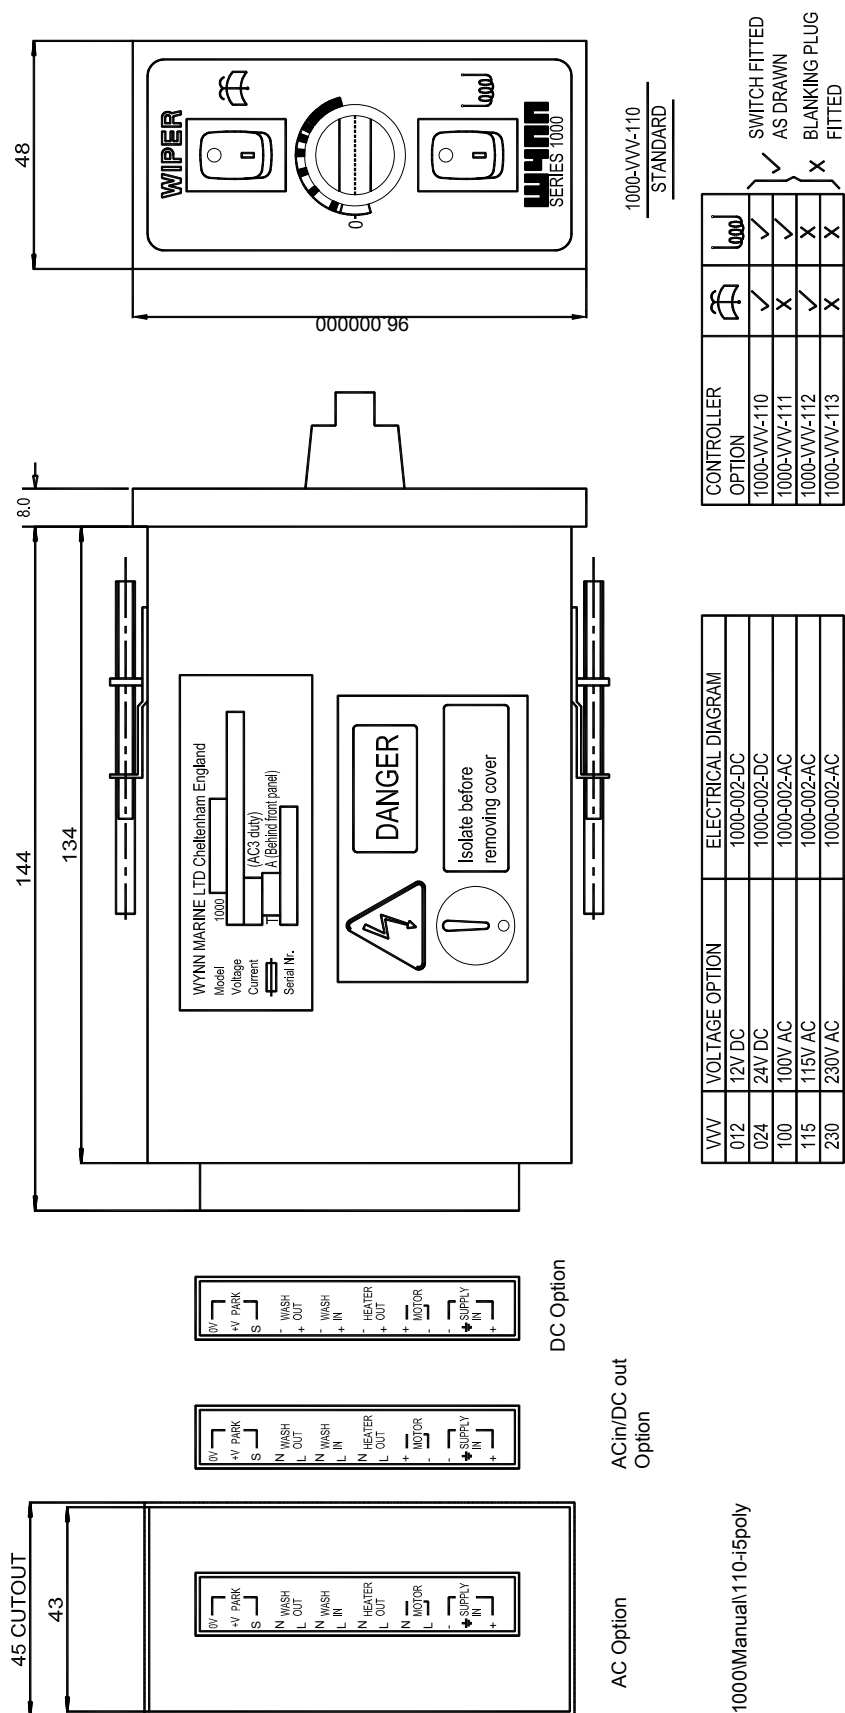

\\1000\Manual\110-i5poly


Series 1000 Front Panel Layouts




1 WAY




2 WAY GROUPED




2 WAY INDEPENDENT

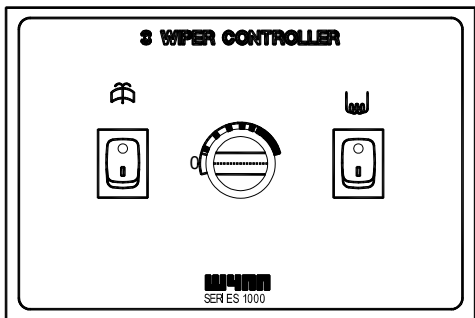



3 WAY GROUPED

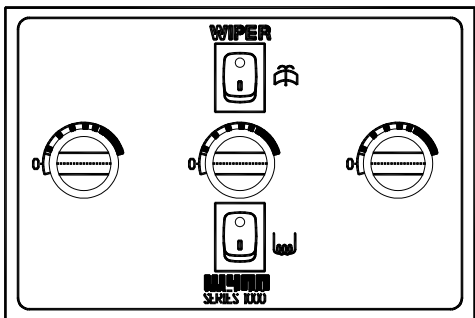


3 WAY INDEPENDENT

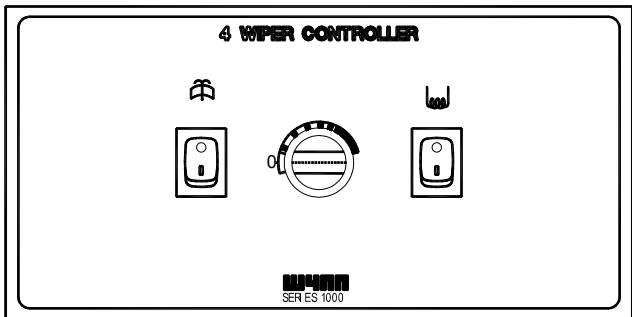

4 WAY GROUPED

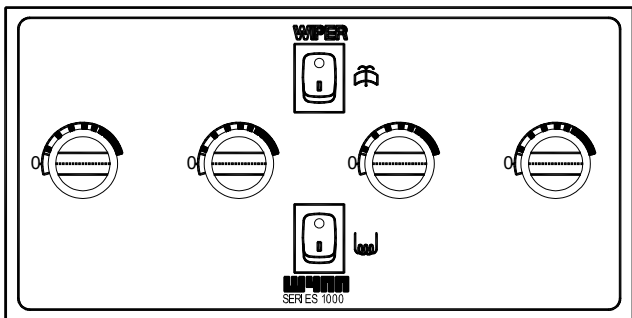

4 WAY INDEPENDENT

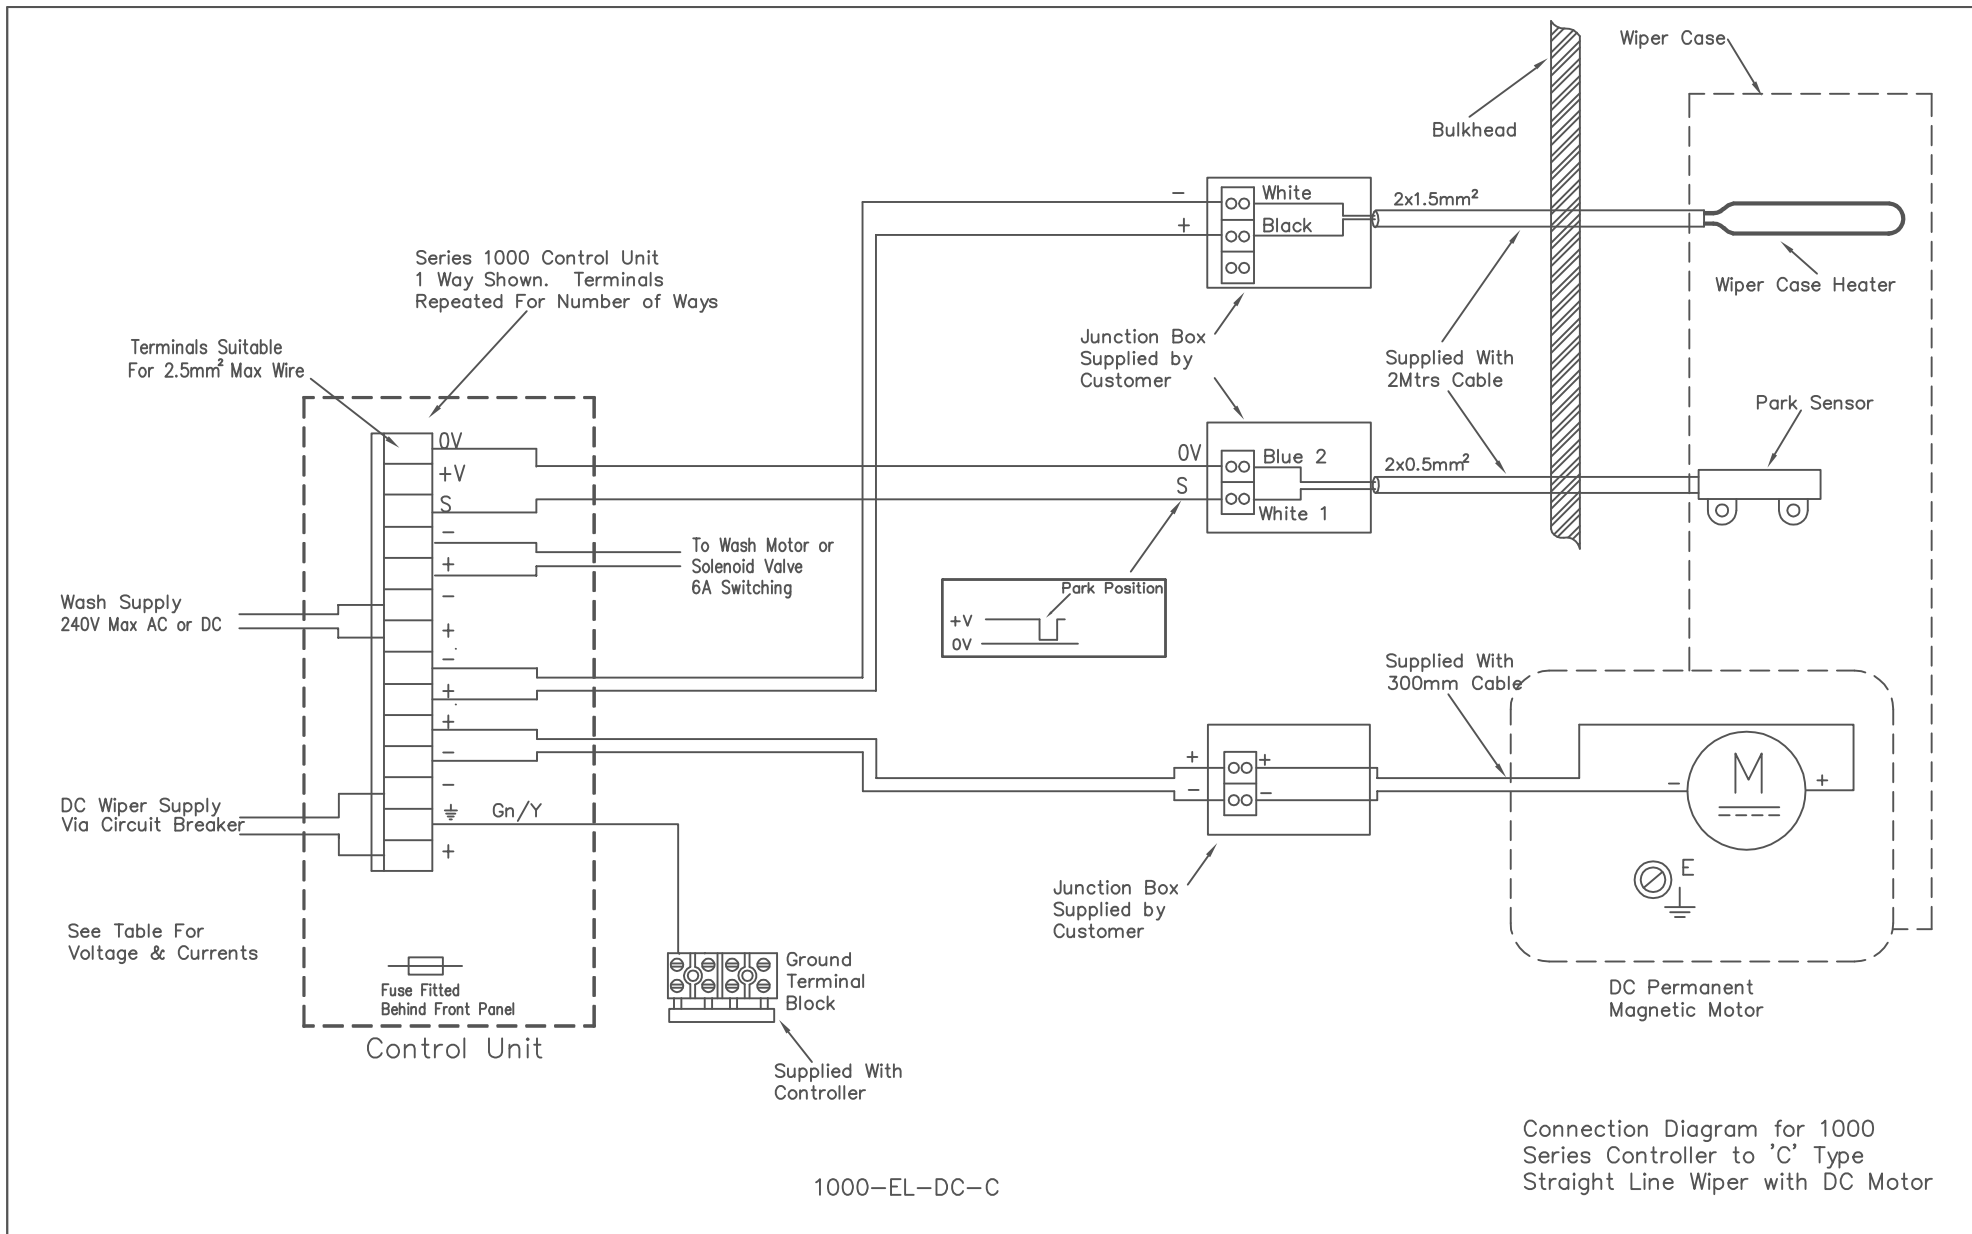

3rd ANGLE PRO.

TOLERANCES UNLESS OTHERWISE STATED
DECIMAL DIMS. TO 2 PLACES $\pm 0.1\text{mm}$.
DECIMAL DIMS. TO 1 PLACE $\pm 0.25\text{mm}$
NO DECIMAL PLACES $\pm 0.5\text{mm}$
ANGLES $\pm 1^\circ$

MAT'L: 15.4.99

2

ISS. DIN

DATE

ISS. DIN

DATE

ISS. DIN

DATE

MOD STATUS

THE COPYRIGHT OF THIS DRAWING IS VESTED IN WYNN MARINE LTD. AND MUST NOT BE REPRODUCED WITHOUT WRITTEN PERMISSION OF THE COMPANY OR USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT HAS BEEN SUPPLIED.

WYNN MARINE LIMITED

CHELTENHAM

ENGLAND

TITLE:- Connection Diagram for 1000
Series Controller to 'C' Type
Straight Line Wiper with DC Motor

DRAWING No. 1000-EL-DC-C Sht 1/3

1000\EL\DC-C_12

SCALE:- NTS

DRAWN:- DCT

CHKD:-

CHANGED:-

General Fault Finding Guide

NOTE: This fault finding guide assumes a reasonable level of technical ability and should be carried out by a suitably qualified person.

Problems: Control panel does not operate wiper.

| Possible Cause | Solution |
|--|---|
| No Power. | Check power supply is on and working. |
| Power not reaching motor | Check ship's incoming supply fuses or circuit breakers. Check for wiring fault, broken wire or loose terminal. If possible confirm (with voltmeter) power is present at motor input and output terminals of control module. |
| Connections to motor incorrect. | Check wiring according to the appropriate electrical installation drawing. |
| Ship's voltage too low. | Check voltage as close to the motor as possible, with motor running. See relevant tables for acceptable values. |
| Bus connections incorrect. | Check wiring between modules to ensure all modules, power supply and control panel are correctly connected. |
| Motor Thermal Cut Out tripped. Single Phase AC motors only. | The 1 Ø AC motors have a thermal cut out embedded into the stator winding. If the motor gets too hot the thermal cut out disconnects the supply to the motor. Switch off and allow the motor to cool down. About 20 minutes later the cut out will reset allowing normal operation. |
| Motor brushes or commutator worn (DC motor only) | Check motor commutator and brushes |
| Motor burned out. | This should not be possible - could happen by incorrect voltage of motor, or a motor fault. The motor needs a reasonable amount of free space to provide sufficient cooling airflow – check. The motor should be protected by fuses, check type and rating. |
| Wiper motor not fully engaged on coupling. | Slacken pinch bolt, move motor and/or wiper arm to align coupling and push motor into engagement with coupling. Retighten pinch bolt. Make sure that the rubber coupling is fitted |
| Carriage motion jammed. | It should be possible by pushing the blade arm to move the mechanism over the stroke length. Remove cover and check for obstructions. Check the Blade Arm Screws. |
| Drive pulley turning but belt slipping. | Excessive friction - Check carriage rollers and motor drive coupling. Replace as required. Idler pulley springs broken or missing. Replace. |
| Drive belt broken or damaged. | Inspect belt for slip or burn damage. Belt at end of life. Replace. |
| Idler pulley jammed. | Damaged by impact, or bearing system failed. Replace assembly. |
| Corrosion. | If corroded, check for water ingress through seals and tightness of connections, Replace wiper unit if necessary |

Problem: Wiper runs but at wrong speed

| Possible Cause | Solution |
|--|---|
| Ship's voltage incorrect. | Check voltage as near as possible to the motor, with motor running. |
| Motor brushes worn (DC Only) | Inspect brushes and replace as necessary. |
| High / Low speed wiring incorrect (3 Phase 2 Speed models only) | Check wiring complies with appropriate drawing. |
| One phase missing (3 Phase 2 Speed models only) | Check input and outputs from control module. Check ships fuses |

Problem: Wiper runs but is noisy

| Problem Cause | Solution |
|---|---|
| Wiper arm is obstructed by: - Window frame, spray jets, etc. | If necessary gently bend arms or spray jets out of path of wiper arm. |
| Incorrect arm attachment screws. | These must not be longer than the 10mm screws provided by Wynn |
| Vibration of wiper unit | Check the front cover fixing screws are secure. |
| Arm attachment plate fouling on wiper case | Attachment screws not fully tightened - check. Blade arm or bracket bent out of place - check. |

Problem: Wiper does not clean the screen properly.

| Possible Cause | Solutions |
|-----------------------------------|---|
| Blade not in contact with screen. | Blade or arm bent - inspect and replace. Arm pivots seized due to corrosion - replace. Heaters ineffective allowing ice build up. |
| Weak springs on blade arm. | Stronger springs may be required. Contact Agent/Distributor |
| Broken springs on blade arm. | Investigate reason of failure and replace. Springs are good down to -40 °C. |
| Blade rubber missing or damaged. | Maintenance item. Replace as required. |

Problem: Wiper does not park correctly

| Possible Cause | Solution |
|-------------------------------|---|
| Park Sensor failed. | Check reed sensor action, will need tester (meter). |
| Park Sensor Actuator missing. | Check magnet/spacer arrangement on carriage. |

Problem: If fitted, heater does not become warm when switched on

| Possible Cause | Solutions |
|--|--|
| Fuse blown or circuit breaker tripped (if fitted). | Check for short-circuited heater, will need tester (meter). Check for wiring damage or loose wires. Check connections are good. |
| Heater failed. | Check for continuity, will need tester (meter). |
| Earth leakage circuit breaker trips. | It is common for earth leakage to rise if a heater has not been used for a while - if possible allow heater the warm up so to dry out. The heater's water seal or cable may be damaged allowing ingress of water - check and replace. |
| No power. | Verify power is getting to module and is available at output of module when selected. |

Problem: If fitted, little or no washer water comes out when button pressed.

| Possible Cause | Solution |
|--|--|
| Pump or supply pressure too low. | Check Ship's water supply, or pump for output pressure. |
| On reservoir systems, empty. | Check - refill. |
| Water control valve faulty or not operating. | Check solenoid valve continuity. Replace if open circuit. |
| Supply lines or jets blocked. | Try air purge, if available. Dismantle and flush pipes. |
| Water frozen. | Switch on heaters. |

Type C Wiper Maintenance

Wynn products have been proven over many years to perform well under the harshest condition of use. To maintain their performance the following schedule is recommended:

Every 6 Months

Replace Articulated Blades.

DC motors only

1. Inspect the motor brushes. Remove motor end cover. Prevent brushes from running down to less than 6mm height in service. Brushes can be lifted out of their holder after lifting off the springs. Replace brushes back into same holder and in the same orientation. Ensure that the brush 'pig tails' is free and that the springs are correctly replaced.
2. When replacing brushes, carefully clear out any residual carbon dust from the motor.



WARNING: DO NOT INHALE THE CARBON DUST.

3. Inspect the motor commutator – it should still be bright. If it is blackened the motor should be replaced or serviced. This can be done with light cleaning with 'flour' paper, but not 'emery' paper.

Every 12 Months

1. Check condition of the Rigid Wiper Blade. Replace if necessary.
2. Check Heaters if fitted. If these have not been used for some time, then leave them on for approximately 2 hours.
NOTE: If not used for long periods, some mineral insulated heaters will take up moisture and begin to show current leakage to ground. By running them for the stated time this process can be reversed and the insulation returned to near infinity values. When dry, insulation resistance is > 100 M ohm at 500V.
3. Check the drive belt for deterioration. Replace if necessary.
4. Check carriage is smooth and all guide rollers are free to rotate. Inspect 'tyres' on the guide rollers for splitting / perishing. Replace complete roller if necessary.



Caution: Guide rollers have an integral water lubricated bearing and **MUST NOT** be grease lubricated.

5. Check for free movement of idler pulleys in response to belt tension. Lubricate as necessary with water resistant grease.
6. Ensure free movement of drive pulley. Replace if damaged or when showing signs of excessive wear.
NOTE: The drive pulley is jig assembled and should not be dismantled.
7. Check for free blade arm spring movement. Dismantle, re-grease or replace if necessary.

Type C Wiper Inspection / Renewal of Parts



WARNING: To ensure health & safety, **remove power** from the control unit, before working on any parts of the wiper either inside or outside.

Drive Belt

1. Undo the cover bolts and remove the cover.
2. Remove the blade assembly. Carefully retain the special short screws.
3. Slip the belt off the spring-loaded pulleys then slide the carriage/belt assembly out of the end of the case at the idler pulley end. Note: The assembly can be removed from the drive pulley end, but the park sensor will then need to be detached first (where fitted).
4. In multi wiper installations, if there is insufficient space between adjacent wipers to remove the carriage, then it will be necessary to draw the carriage / belt assembly through adjacent wiper cases, detaching park sensors where necessary.
5. Inspect the drive belt and replace if damaged or worn. To detach the drive belt, note how the parts are assembled, then undo the 2 small nuts securing the belt to the clip.
6. Fit a new belt. Spare belts are supplied with nuts and clip plate. Refit and tighten nuts to the same height as the original and secure with Loctite thread lock (or similar).
7. Fit the carriage & belt assembly back into the casing and slip the belt onto the drive & idler pulleys.
8. Move the carriage by hand and ensure that it travels the full stroke length freely and without any obstruction. (Motion will feel restricted because the motor is being rotated if in doubt discount the motor). Refit the blade assembly with special screws removed. Refit the front cover and secure with the 2 off M8 cover bolts.

Guide Rollers

1. Follow the Drive Belt renewal instructions 1 to 3 above.
2. Remove the roller stub shaft securing the guide roller and remove the guide roller.
3. Fit the new guide roller and secure with the roller stub shaft. Ensure that roller stub shaft is tightened firmly.
4. Re-assembly is reversal of above instructions.



CAUTION: Rollers have an integral water lubricated bearing and **MUST NOT** be oil or grease lubricated.

Type C Common Cover Single Wiper Spares List

| Ident | Description | Quantity | Part Number |
|-----------|---|----------|-------------------------|
| 1 | Heavy Duty Blade Assembly | 1 | 1688-001-*** |
| | Articulated Blade Assembly | 1 | 1279-553-*** |
| 2 | Blade Attachment Clip (Stainless Steel) | 1 | 1279-443 |
| 3 | Either - Blade Arm Assembly - Standard | 1 | CC**R* |
| | Or - Blade Arm Assembly - Square | 1 | CC**S* |
| 4 | Blade Arm Pivot Blocks | Pair | 1279-486-### |
| 5 | Blade Arm Torsion Spring | 1 | 1292-221 |
| 5b | Arm Spring(s) - where fitted at top of arm ‡ | 1 or 2 | 1279-157 |
| 6 | Arm Attachment Screws | Set of 3 | 1588-488 |
| 7 | Carriage Plate Assembly - Single Blade | 1 | 1588-005 |
| 8 | Guide Rollers complete with Tyre | Set of 8 | 1588-117 |
| | Guide Rollers | 1 | 1588-006 |
| 9 | Roller Stub Shaft (one per roller) | 1 | 1588-113 |
| 10 | Connecting Rod Assembly - Single | 1 | 1588-004 |
| 11 | Vee-Belt | 1 | 1279-106-*** |
| 12 | Idler Pulley Assembly c/w Springs - Single | 1 | 1588-452 |
| 13 | Idler Pulley Tension Spring - Single | 1 | 1279-157 |
| 14 | Idler Pulley Guide Assembly | 1 | 1588-490 |
| 15 | Drive Shaft and Pulley Assembly - 84mm Std | 1 | 1588-009-117 |
| | Drive Shaft and Pulley Assembly - 140mm | 1 | 1588-009-173 |
| | Drive Shaft and Pulley Assembly - 200mm | 1 | 1588-009-233 |
| | Drive Shaft and Pulley Assembly - 220mm | 1 | 1588-009-253 |
| | Drive Shaft and Pulley Assembly - 35mm | 1 | 1642-003 |
| | Gas Tight Drive Shaft and Pulley Assembly | 1 | 1588-360 |
| 17a | Parvalux 61, 115V AC, 50/60Hz, 3-Ph, 2 Speed | 1 | 1490-000-GA61 |
| | Parvalux 62D, 230V AC, 50/60Hz, 3-Ph, 2 Speed | 1 | 1490-000-GA62D |
| | Parvalux 64, 230V AC, 50/60Hz, 1-Ph, 1 Speed | 1 | 1490-000-GA64 |
| | Parvalux 65, 115V AC, 50/60Hz, 1-Ph, 1 Speed | 1 | 1490-000-GA65 |
| | Parvalux 64L, 230V AC, 50/60Hz, 1-Ph, Low Speed | 1 | 1490-000-GA64-L |
| | Parvalux 65L, 115V AC, 50/60Hz, 1-Ph, Low Speed | 1 | 1490-000-GA65-L |
| 17b | SD11AM 115V AC, 50 Hz Variable Speed | 1 | 1279-347 |
| | SD11AM 115V AC, 60 Hz Variable Speed | 1 | 1279-348 |
| | SD11AM 230V AC, 50/60 Hz Variable Speed | 1 | 1279-349 |
| 17c | PM3M 24Vdc Motor | 1 | 1279-418 |
| | PM3M 24Vdc Motor Slow Speed | 1 | 1279-418L |
| | PM5M 24Vdc Motor | 1 | 1279-513 |
| 18 | Front Cover - Less Heater | 1 | See calculator 1681-161 |
| 19 | Heater - Single Wiper | 1 | 1588-010-\$\$\$-^^ |
| | Heater Clip | A/R | 1588-056 |
| 20 | Spray Tube Assembly | 1 | 1588-467 |
| 21 | Cover Bolts | each | #A0008-090S |
| 22 | End Cover | pair | 1588-058* |
| 23 | Fixing Screw | 6 | *P00012S-1.0S |
| 24 | Self Parking Assembly (Reed switch and magnet) | 1 | 1588-012-* |
| | Self Parking Assembly (Reed switch only) | 1 | SP1588-034-* |
| 25 | Main Frame | 1 | See calculator 1681-161 |
| 26 | Motor Housing Nut | each | #NN006-S |
| 27 | Motor Housing Washer | each | #W0006-S |
| 28 | Motor Housing Bolt | each | #H0006-020S |
| 29 | Pivot Block Securing Nut | each | *NL0.25F-S |
| not shown | Drive Coupling - fitted inside motor end of Drive Shaft (Item 15) | 1 | 1279-250 |
| not shown | L050 Rubber Spider – fitted to Drive Coupling inside Drive Shaft | 1 | 1279-252 |

| | | | |
|-----------|---|-------|----------|
| not shown | Sealing Grommet – fitted around Drive Shaft | 1 | 1279-137 |
| not shown | Sealing Grommet Spacer– fitted around Drive Shaft | 1 | 1588-745 |
| not shown | Carbon Motor Brushes – fitted in 12/24 V dc motor | 2/set | 1279-342 |

*** In the Part Number means length in mm.


In the part number means spring pressure in lb/ft. This is determined by Wynn according to arm and blade dimensions, together with any window rake angle from the vertical. This value can also be obtained from the original order documentation. See Wynn Agent for more details.

‡ Where required, extra spring pressure is obtained by the addition of 1 or 2 springs to the wiper arm. Where fitted, order 1 or 2 as required. Contact Wynn Agent for more details.

\$\$\$ Where \$\$\$ is voltage (220,115 or 024)

^ Where ^ is heater length code.

Type C Common Cover Single Spare Parts Drawing.

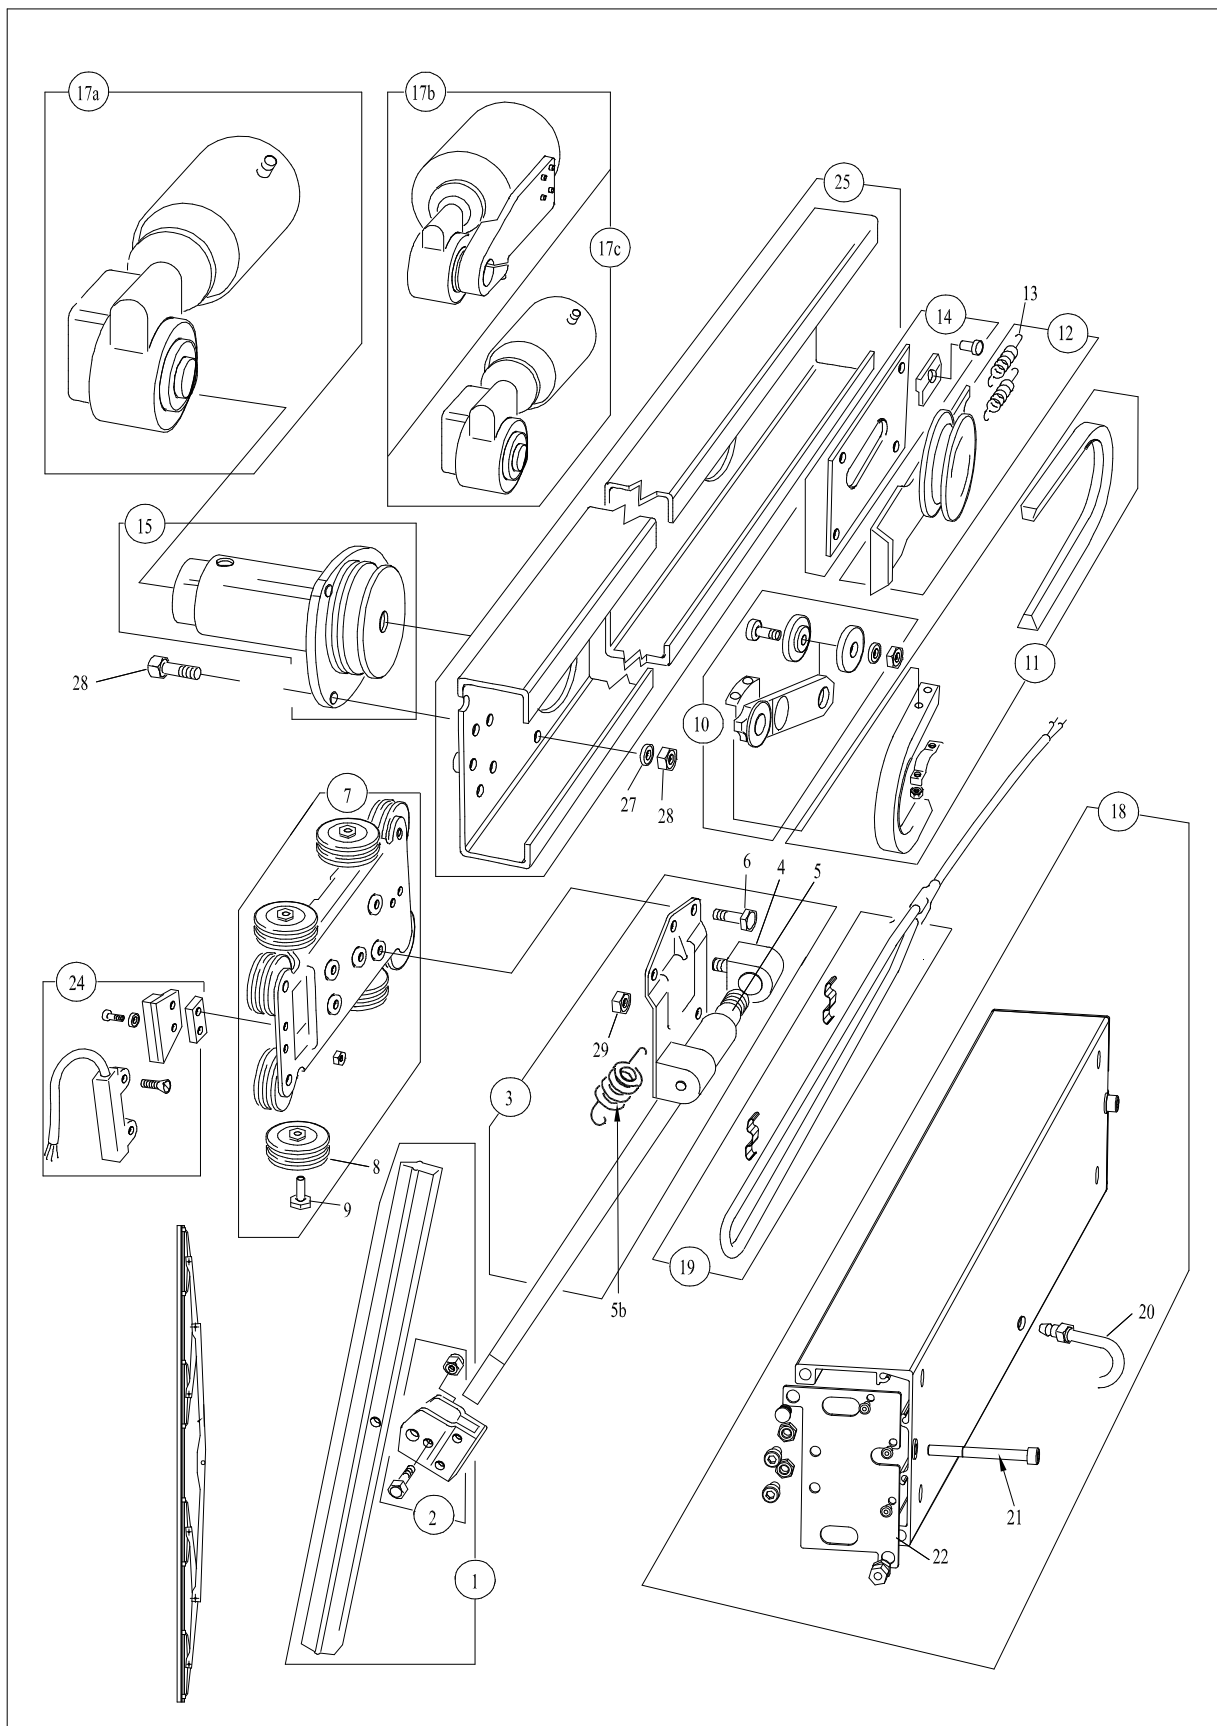

Type C Common Cover Twin Wiper Spares List

| Ident | Description | Quantity | Part Number |
|-----------|---|---------------|-------------------------|
| 1 | Heavy Duty Blade Assembly | 1 | 1688-001-*** |
| | Articulated Blade Assembly | 1 | 1279-553-*** |
| 2 | Blade Attachment Clip (Stainless Steel) | 1 | 1279-443 |
| 3 | Either - Blade Arm Assembly - Standard | 1 | CC**R* |
| | Or - Blade Arm Assembly - Square | 1 | CC**S* |
| 4 | Blade Arm Pivot Blocks | 2 Pairs | 1279-486-### |
| 5 | Blade Arm Torsion Spring | 2 | 1292-221 |
| 5b | Arm Spring(s) - where fitted at top of arm ‡ | 1 or 2 | 1279-157 |
| 6 | Arm Attachment Screws | Set of 3 (x2) | 1588-488 |
| 7 | Carriage Plate Assembly - Twin Blade (including tie bar) | 1 | 1588-312-*** |
| 8 | Guide Rollers complete with Tyre | Set of 8 (x2) | 1588-117 |
| | Guide Rollers | 1 | 1588-006 |
| 9 | Roller Stub Shaft (one per roller) | 1 | 1588-113 |
| 10 | Connecting Rod Assembly - Twin | 1 | 1588-004 |
| 11 | Vee-Belt | 1 | 1279-106-*** |
| 12 | Idler Pulley Assembly c/w Springs - Twin | 1 | 1588-452T |
| 13 | Idler Pulley Tension Spring - Twin | 1 | 1279-496 |
| 14 | Idler Pulley Guide Assembly | 1 | 1588-490 |
| 15 | Drive Shaft and Pulley Assembly - 84mm Std | 1 | 1588-009-117 |
| | Drive Shaft and Pulley Assembly - 140mm | 1 | 1588-009-173 |
| | Drive Shaft and Pulley Assembly - 200mm | 1 | 1588-009-233 |
| | Drive Shaft and Pulley Assembly - 220mm | 1 | 1588-009-253 |
| | Drive Shaft and Pulley Assembly - 35mm | 1 | 1642-003 |
| | Gas Tight Drive Shaft and Pulley Assembly | 1 | 1588-360 |
| 17a | Parvalux 61, 115V AC, 50/60Hz, 3-Ph, 2 Speed | 1 | 1490-000-GA61 |
| | Parvalux 62D, 230V AC, 50/60Hz, 3-Ph, 2 Speed | 1 | 1490-000-GA62D |
| | Parvalux 64, 230V AC, 50/60Hz, 1-Ph, 1 Speed | 1 | 1490-000-GA64 |
| | Parvalux 65, 115V AC, 50/60Hz, 1-Ph, 1 Speed | 1 | 1490-000-GA65 |
| | Parvalux 64L, 230V AC, 50/60Hz, 1-Ph, Low Speed | 1 | 1490-000-GA64-L |
| | Parvalux 65L, 115V AC, 50/60Hz, 1-Ph, Low Speed | 1 | 1490-000-GA65-L |
| 17b | SD11AM 115V AC, 50 Hz Variable Speed | 1 | 1279-347 |
| | SD11AM 115V AC, 60 Hz Variable Speed | 1 | 1279-348 |
| | SD11AM 230V AC, 50/60 Hz Variable Speed | 1 | 1279-349 |
| 17c | PM3M 24Vdc Motor | 1 | 1279-418 |
| | PM3M 24Vdc Motor Slow Speed | 1 | 1279-418L |
| | PM5M 24Vdc Motor | 1 | 1279-513 |
| 18 | Front Cover - Less Heater | 1 | See calculator 1681-161 |
| 19 | Heater - Single Wiper | 1 | 1588-010-\$\$\$-^^ |
| | Heater Clip | A/R | 1588-056 |
| 20 | Spray Tube Assembly | 1 | 1588-467 |
| 21 | Cover Bolts | each | #A0008-090S |
| 22 | End Cover | pair | 1588-058* |
| 23 | Fixing Screw | 6 | *P00012S-1.0S |
| 24 | Self Parking Assembly (Reed switch and magnet) | 1 | 1588-012-* |
| | Self Parking Assembly (Reed switch only) | 1 | SP1588-034-* |
| 25 | Main Frame | 1 | See calculator 1681-161 |
| 26 | Motor Housing Nut | each | #NN006-S |
| 27 | Motor Housing Washer | each | #W0006-S |
| 28 | Motor Housing Bolt | each | #H0006-020S |
| 29 | Pivot Block Securing Nut | each | *NL0.25F-S |
| not shown | Drive Coupling - fitted inside motor end of Drive Shaft (Item 15) | 1 | 1279-250 |
| not shown | L050 Rubber Spider – fitted to Drive Coupling inside | 1 | 1279-252 |

| | | | |
|-----------|---|-------|----------|
| | Drive Shaft | | |
| not shown | Sealing Grommet – fitted around Drive Shaft | 1 | 1279-137 |
| not shown | Sealing Grommet Spacer– fitted around Drive Shaft | 1 | 1588-745 |
| not shown | Carbon Motor Brushes – fitted in 12/24 V dc motor | 2/set | 1279-342 |

*** In the Part Number means length in mm.


In the part number means spring pressure in lb/ft. This is determined by Wynn according to arm and blade dimensions, together with any window rake angle from the vertical. This value can also be obtained from the original order documentation. See Wynn Agent for more details.

‡ Where required, extra spring pressure is obtained by the addition of 1 or 2 springs to the wiper arm. Where fitted, order 1 or 2 as required. Contact Wynn Agent for more details.

\$\$\$ Where \$\$\$ is voltage (220,115 or 024)

^ Where ^ is heater length code.

Type C Common Cover Twin Spare Parts Drawing.

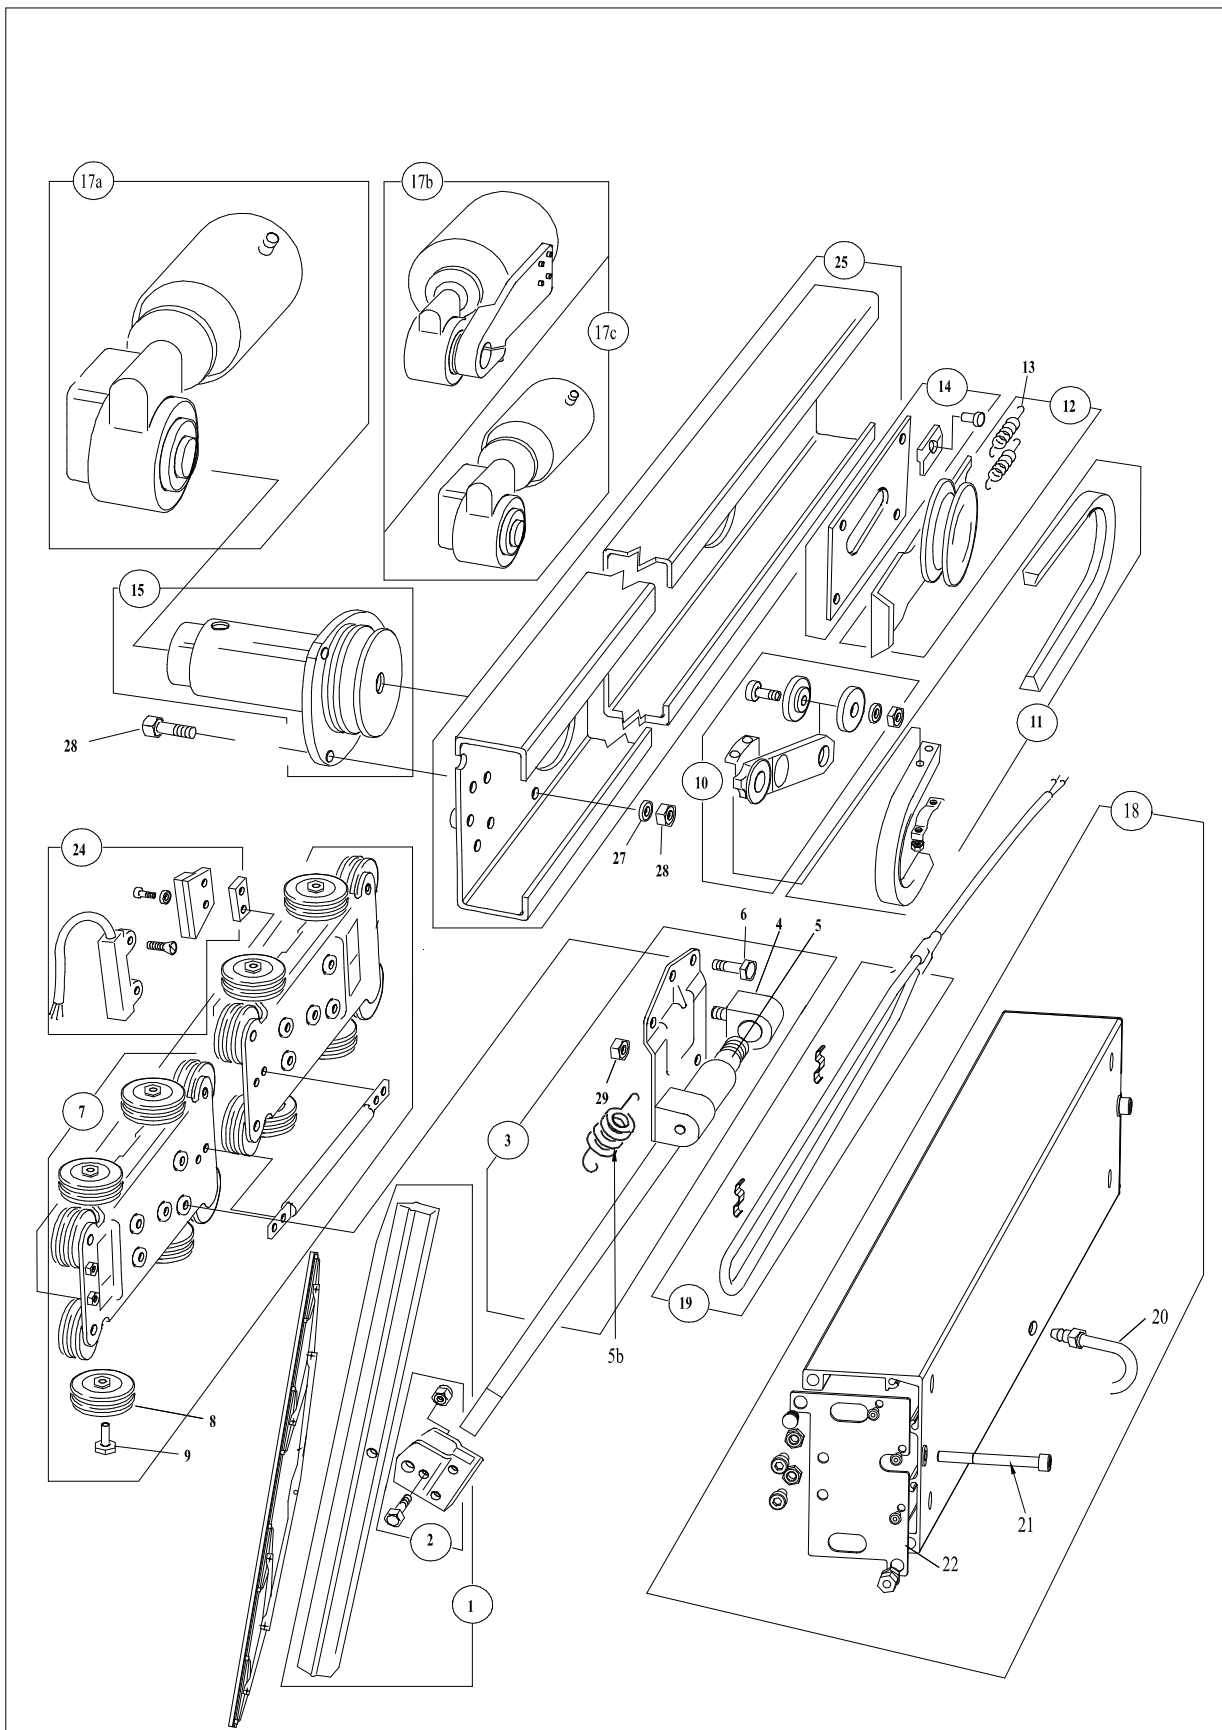

[illegible]

| CODE | STROKE TYPE | CODE |
|------|-----------------------------------|------|
| D1 | | |
| D2 | | |
| D4 | Single | 1 |
| D5 | Twin | 2 |
| C1 | Special Twin Case (Non-std ctrs) | Q |
| C2 | Special Single (See Instructions) | S |
| C3 | Special Twin (See Instructions) | T |
| C4 | | |
| C5 | | |

| SINGLE STROKE LENGTH | |
|----------------------|------|
| CODE | |
| INCHES | MM |
| 12 | 305 |
| 15 | 350 |
| 17 | 430 |
| 19 | 480 |
| 21 | 533 |
| 23 | 585 |
| 25 | 635 |
| 27 | 685 |
| 29 | 735 |
| 31 | 787 |
| 33 | 840 |
| 35 | 890 |
| 36 | 915 |
| 37 | 940 |
| 39 | 990 |
| 41 | 1040 |
| 43 | 1095 |
| 45 | 1145 |
| 47 | 1195 |
| 49 | 1245 |
| 51 | 1295 |
| 53 | 1335 |
| 55 | 1400 |
| 57 | 1450 |
| 59 | 1500 |
| 61 | 1560 |
| 63 | 1605 |
| 67 | 1700 |
| 71 | 1800 |
| 76 | 1930 |
| 79 | 2005 |
| 89 | 2260 |

| HEATER | CODE |
|-------------|------|
| No Heater | 0 |
| 24v Heater | A |
| 115v Heater | B |
| 220v Heater | C |

| HEATER CABLE LENGTH | CODE |
|----------------------------|------|
| Not Supplied | 0 |
| 2 Metres | 1 |
| 3 Metres | 7 |
| 5 Metres | 2 |
| 6 Metres | 8 |
| 10 Metres | 3 |
| 20 Metres | 4 |
| 25 Metres | 5 |
| Terminated in Enclosure | 6 |

| PARKING | CODE |
|--------------------|------|
| Parking Not Fitted | 0 |

Standard Drive End Parking

Normally open) - A
Reed Switch (TYPE D)

Normally open) - B
Reed Switch (TYPE C)

Non-Standard Drive End Parking

Proximity Switch (TYPE D) - G

Reed Switch Change over - C
(Special Type C)

Standard Idler End Parking

Normally open) - D
Reed Switch (TYPE D)

Normally Open) - E
Reed Switch (Type C))

Non-Standard Idler End Parking

Proximity Switch (Type D) - H
Reed Switch c/over - F
(Special Type C)

| PARKING CABLE LENGTH | CODE |
|-------------------------|------|
| Not Supplied | 0 |
| 2 Metres | 1 |
| 3 Metres | 7 |
| 5 Metres | 2 |
| 6 Metres | 8 |
| 10 Metres | 3 |
| 20 Metres | 4 |
| 25 Metres | 5 |
| Terminated in Enclosure | 6 |

| Wiper Type | Motor Type | Code |
|--------------------|---|--------------|
| MOTOR NOT SUPPLIED | | MO |
| NO POD | | 00 |
| B/C/D | 115vac 1ph 50/60hz 1Sp | GA65 CA |
| C/D | 115vac 1ph 50/60hz Low Sp | GA65-L CB |
| B | 115vac 1ph 50hz Var Sp | SD 11 CC |
| B | 115vac 1ph 60hz Var Sp | SD11 CD |
| B/C/D | 115vac 3ph 50/60hz 2Sp | GA61 CE |
| C | 115vac 3ph 50/60hz 2Sp IP23 | GA61-IP23 CF |
| B/C/D | 115vac 3ph 50/60hz 1Sp | GA63 CG |
| B/C/D | 230vac 1ph 50/60hz 1Sp | GA64 CH |
| C/D | 230vac 1ph 50/60hz Low Sp | GA64L CJ |
| B | 230vac 1ph 50/60hz Var Sp | SD11 CK |
| C | 230vac 1ph 50/60hz 1Sp IP23 | GA64-IP23 CL |
| B/C/D | 230vac 3ph 50/60hz 2Sp | GA62D CM |
| B/C/D | 230vac 3ph 50/60hz 1Sp | GA68 CN |
| C/D2 | 24vdc 320rpm 90W (1279-051) PM3 | CP |
| C/D2 | 24vdc 320rpm 150W (1279-513) PM5 | CR |
| D5 | 24vdc 320rpm 90W (1279-557) PM3 | CS |
| D5 | 24vdc 320rpm 150W (1279-555) PM5 | CT |
| C | 230vac 3ph 50/60hz 2Sp GA62D-IP23-E (emc) | CW |
| C | 100vac 1ph 1Sp GA69 | CY |
| C/D | 414vac 3ph 50/60hz 2 Sp | CX |
| D5/C | 24vdc 162rpm SLOW (1279-557L) PM3 | CY |
| C/D2 | Pneumatic Drive Motor | |


| MOTOR CABLE LENGTH | | | |
|--------------------|---------------------|------------------|--------|
| | MULTIPLE CABLES (D) | SINGLE CABLE (D) | TYPE C |
| Not Supplied | A | A | A |
| 2 Metres | B | K | S |
| 3 Metres | X | Y | G |
| 5 Metres | C | L | T |
| 6 Metres | | | Z |
| 10 Metres | D | M | U |
| 12 Metres | | H | |
| 15 Metres | | R | |
| 20 Metres | E | N | V |
| 25 Metres | F | P | W |

| PAINT FINISH | CODE |
|---|------|
| Standard White | A |
| Ad Light Grey BS381C/697 | B |
| Munsell N9.5 | C |
| R84890 Haze Grey | D |
| RAL 7001 | E |
| Storm Grey | F |
| Int Paint H725 | G |
| French Gry J724 BS381C/ 630 | H |
| Light Grey BS381C/631 | J |
| RAL 7000 Navy Grey) (Bruno Peter Type 76)) | K |
| Cream 20320 | L |
| Yellow RAL 1003 | M |
| Int Paint E459 | N |
| Black Dull RAL 9005 | P |
| Canadian Grey CL1647 | R |
| RAL 7037 Dusty Grey | T |

| SPRAY | CODE |
|-------------------|------|
| No Spray | 0 |
| Std Spray Fitted | 1 |
| Spray Std + Banjo | 2 |
| Spray Jet S/Steel | 3 |
| 150mm Spray Jet | 4 |

| MOTOR POSITION (viewed from outside) | CODE |
|---|------|
| Above Window Left | A |
| Above Window Right | B |
| Below Window Left | C |
| Below Window Right | D |
| Left Side Window Top | E |
| Right Side Window Top | F |
| Left Side Window Bttm | G |
| Right Window Bottom | H |

CAD FILENAME + DIRECTORY M:\DRAW\1681\1681-161-SHT1

| | | | | | | | | | |
|--|----|-----|----------|----|-----|----------|----|-----|----------|
| 3rd ANGLE PROJ.  TOLERANCES UNLESS OTHERWISE STATED DECIMAL DIMS. TO 2 PLACES ± 0.1mm. DECIMAL DIMS. TO 1 PLACE ± 0.25mm NO DECIMAL PLACES ± 0.5mm ANGLES ± 1° | 15 | 203 | 11.07.07 | 10 | 609 | 22.11.05 | 20 | 289 | 22.07.08 |
| | 14 | 160 | 08.02.07 | 9 | 607 | 21.11.05 | 19 | 281 | 17.06.08 |
| | 13 | 149 | 08.01.07 | 8 | 604 | 18.11.05 | 18 | 266 | 05.03.08 |
| | 12 | 092 | 07.06.06 | 7 | 547 | 25.10.05 | 17 | 252 | 16.01.08 |
| | 11 | 025 | 23.02.06 | 6 | 514 | 04.10.05 | 16 | 225 | 12.10.07 |

| | | | | | | | | | |
|----------|---------|---------|------|--------|-----|------|-----------|-----|------|
| MAT'L:- | ISS. | DIN | DATE | ISS. | DIN | DATE | ISS. | DIN | DATE |
| FINISH:- | SCALE:- | DRAWN:- | DD | CHKD:- | | | CHANGED:- | | DD |

| |
|----------|
| USED ON: |
|----------|

THE COPYRIGHT OF THIS DRAWING IS VESTED IN WYNN MARINE LTD. AND MUST NOT BE REPRODUCED WITHOUT WRITTEN PERMISSION OF THE COMPANY OR USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT HAS BEEN SUPPLIED.



MARINE LIMITED

CHEI TENHAM ENGLAND

| | |
|---------|---|
| TITLE:- | STRAIGHT LINE WIPER UNIT PART NUMBER OPTIONS |
|---------|---|

| | |
|-------------|----------|
| DRAWING No. | 1681-161 |
|-------------|----------|

SHEET 1 OF 2

SPARES
ORDERINGEXAMPLE
NUMBER

D 5 1 1 1 9 B 1 A 1 1 A 1
*** * * * ***

WIPER
TYPE CODE

D1 -D1
D2 -D2
D4 -D4
D5 -D5
C -C1

COVER /
CASE CODE

COVER -1
CASE -2
COVER -3
old style C

STROKE TYPE CODE

Single 1
Twin 2
Special Twin Case (Non-std ctrs) Q
Special Single (See Instructions) S
Special Twin (See Instructions) T

SINGLE STROKE LENGTH
CODE

| INCHES | MM |
|--------|------|
| 12 | 305 |
| 15 | 350 |
| 17 | 430 |
| 19 | 480 |
| 21 | 533 |
| 23 | 585 |
| 25 | 635 |
| 27 | 685 |
| 29 | 735 |
| 31 | 787 |
| 33 | 840 |
| 35 | 890 |
| 37 | 940 |
| 39 | 990 |
| 41 | 1040 |
| 43 | 1095 |
| 45 | 1145 |
| 47 | 1195 |
| 49 | 1245 |
| 51 | 1295 |
| 53 | 1335 |
| 55 | 1400 |
| 57 | 1450 |
| 59 | 1500 |
| 61 | 1560 |
| 63 | 1605 |
| 67 | 1700 |
| 71 | 1800 |
| 76 | 1930 |
| 79 | 2005 |
| 89 | 2260 |

TWIN STROKE LENGTH STANDARD

1 INCH (25MM) STROKE OVERLAP

| INCHES | MILLIMETRES | CODE |
|--------|-------------|------|
| 2 X 13 | 2 X 330 | 13 |
| 2 X 14 | 2 X 356 | 14 |
| 2 X 15 | 2 X 380 | 15 |
| 2 X 16 | 2 X 407 | 16 |
| 2 X 17 | 2 X 430 | 17 |
| 2 X 18 | 2 X 457 | 18 |
| 2 X 19 | 2 X 480 | 19 |
| 2 X 20 | 2 X 510 | 20 |
| 2 X 21 | 2 X 533 | 21 |
| 2 X 22 | 2 X 558 | 22 |
| 2 X 23 | 2 X 585 | 23 |
| 2 X 24 | 2 X 610 | 24 |
| 2 X 25 | 2 X 635 | 25 |
| 2 X 26 | 2 X 660 | 26 |
| 2 X 27 | 2 X 685 | 27 |
| 2 X 28 | 2 X 710 | 28 |
| 2 X 29 | 2 X 735 | 29 |
| 2 X 30 | 2 X 760 | 30 |
| 2 X 31 | 2 X 787 | 31 |
| 2 X 32 | 2 X 810 | 32 |
| 2 X 34 | 2 X 865 | 34 |
| 2 X 36 | 2 X 915 | 36 |
| 2 X 40 | 2 X 1015 | 40 |
| 2 X 41 | 2 X 1040 | 41 |
| 2 X 43 | 2 X 1095 | 43 |
| 2 X 45 | 2 X 1145 | 45 |
| 2 X 47 | 2 X 1195 | 47 |
| 2 X 49 | 2 X 1245 | 49 |
| 2 X 52 | 2 X 1335 | 52 |
| 2 X 57 | 2 X 1450 | 57 |
| 2 X 61 | 2 X 1560 | 61 |
| 2 X 67 | 2 X 1700 | 67 |
| 2 X 71 | 2 X 1800 | 71 |
| 2 X 76 | 2 X 1930 | 76 |
| 2 X 79 | 2 X 2005 | 79 |

SPECIAL TWIN

ST

(for twins , eg: 2x24" is shown as 24 with the
2 being stated at the previous part number digit)

HEATER CODE

No Heater -0
24v Heater -A
115v Heater -B
220v Heater -C

NOTE:
HEATERS FITTED TO
COVERS ONLY

HEATER CABLE
LENGTH CODE

Not Supplied -0
2 Metres -1
3 Metres -7
5 Metres -2
6 Metres -8
10 Metres -3
20 Metres -4
25 Metres -5
Terminated
in Enclosure -6

WIPER SPARE
CASE/COVER
PART NUMBERSPARKING CABLE
LENGTH CODE

Not Supplied -0
2 Metres -1
3 Metres -7
5 Metres -2
6 Metres -8
10 Metres -3
20 Metres -4
25 Metres -5

PARKING CODE
Parking Not Fitted 0**Standard Drive End Parking**

Normally open) - A
Reed Switch (TYPE D)

Normally open) - B
Reed Switch (TYPE C)

Non-Standard Drive End Parking

Proximity Switch (TYPE D) - G

Reed Switch Change over - C
(Special Type C)

Standard Idler End Parking

Normally open) - D
Reed Switch (TYPE D)

Normally Open) - E
Reed Switch (Type C)

Non-Standard Idler End Parking

Proximity Switch (Type D) - H

Reed Switch c/over - F
(Special Type C)

PAINT FINISH CODE

Standard White A
Admiralty Light Grey B
Munsell N9.5 C
R84890 Haze Grey D
RAL 7001 E
Storm Grey F
Int Paint H725 G
French Grey J724 H
Light Grey BS381C J
RAL 7000 Navy Grey) K
(Bruno Peter Type 76))
Cream 20320 L
Yellow RAL 1003 M
Int Paint E459 N
Black Dull RAL 9005 P
Canadian Grey CL1647 R
RAL 7037 Dusty Grey T

Special Paint S
(see special instructions)

SPRAY CODE

No Spray -0
Std Spray Fitted -1
Spray Std + Banjo -2
Spray Jet S/Steel -3
150mm Spray Jet -4


NOTE:
SPRAY FITTED TO COVERS
ONLY.
NO SPRAY ON 80, B OR 48

CABLE
EXIT CODE


Not Supplied -0
LEFT -1
RIGHT -2

(above window)

CAD FILENAME + DIRECTORY M:\DRAW\1681\1681-161-SHT2

| | | | | | | | | | | |
|---|---------|---------|----------|--------|-----|-----------|------|-----|----------|------------|
| 3rd ANGLE PRO.  | 15 | 203 | 11.07.07 | 10 | 609 | 22.11.05 | 20 | 289 | 22.07.08 | MOD STATUS |
| | 14 | 160 | 08.02.07 | 9 | 607 | 21.11.05 | 19 | 281 | 17.06.08 | |
| | 13 | 149 | 08.01.07 | 8 | 604 | 18.11.05 | 18 | 266 | 05.03.08 | |
| | 12 | 092 | 07.06.06 | 7 | 547 | 25.10.05 | 17 | 252 | 16.01.08 | |
| | 11 | 025 | 23.02.06 | 6 | 514 | 04.10.05 | 16 | 225 | 12.10.07 | |
| TOLERANCES UNLESS OTHERWISE STATED DECIMAL DIMS. TO 2 PLACES ± 0.1mm. DECIMAL DIMS. TO 1 PLACE ± 0.25mm NO DECIMAL PLACES ± 0.5mm ANGLES ± 1° | ISS. | DIN | DATE | ISS. | DIN | DATE | ISS. | DIN | DATE | |
| MAT'L:- | | | | | | | | | | |
| FINISH:- | SCALE:- | DRAWN:- | DD | CHKD:- | | CHANGED:- | | | | |

USED ON:

| | |
|--|--|
| THE COPYRIGHT OF THIS DRAWING IS VESTED IN WYNN MARINE LTD. AND MUST NOT BE REPRODUCED WITHOUT WRITTEN PERMISSION OF THE COMPANY OR USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT HAS BEEN SUPPLIED. | |
|  | MARINE LIMITED CHELTENHAM ENGLAND |
| TITLE:- | STRAIGHT LINE WIPER COVER/CASE SPARES PART NUMBER OPTIONS |
| DRAWING No. | 1681-161 |
| | SHEET 2 OF 2 |

Documentation

Whilst every effort is made to provide accurate information in good faith, no responsibility can be accepted by Wynn for inaccuracies and Wynn reserves the right to alter and amend specifications and designs without prior notice in line with our policy of continued improvement.

Spares Parts

To enable technical troubleshooting and ordering of spare parts, this manual should be kept in a safe place on board. It is also advisable to keep one set of spare parts on board for emergency use. Please contact Wynn directly or your local distributor / service centre for all order requirements.

Maintenance Schedules

Plan your maintenance work according to the schedule in this manual.

Our Commitment

We are committed to a 10 year product support programme. This ensures that any spare part will be available for any wiper at least 10 years after its purchase. It is strongly recommended that only genuine replacement parts manufactured by WYNN be used. This will guarantee that only suitable materials have been used and will ensure interchangeability of parts.

Quality and Testing

We are committed to the principles of Total Quality Management, ISO 9000. We manufacture our range of marine products to the highest standard and quality. We therefore maintain an ongoing schedule of product improvement and testing. To help us sustain such standards we maintain a salt-water test rig on which our products are taken, at random from the production line, and subjected to 3,000 hour continuous testing. We are sure you will receive many years trouble-free service from your Wynn product and hope you find this information pack comprehensive.

Guarantee

All Wynn equipment is tested before despatch from our works. The Windscreen Wiper System supplied has a 1 year warranty period provided the installation of the system and the subsequent maintenance is in accordance with the installation/maintenance instructions.

We cannot accept any responsibility for the installation of equipment, or damage to the equipment during installation, or normal wear and tear. The guarantee is negated if the equipment is not installed strictly observing the instructions set out in this manual, or not maintained as specified.

The Wiper System is very reliable but to ensure its continued smooth running we recommend that the following guidelines are adhered to:-

Monthly

- Check for wear on all parts subject to friction
- Visual inspection should be made of the blades to ensure that they are still in good condition and replace as soon as there are signs of wear or damage

Annually

- It is recommended that the blades are changed every 12 months

After the Wiper System has been operating in severe weather conditions it is advisable to thoroughly check the unit for signs of wear or damage.

This warranty excludes the wiper blades which are a consumable item and any replacements that are detailed in the manual as part of any regular maintenance requirement.

This guarantee is expressly in lieu of all other guarantees expressed or implied and of all other obligations of liabilities on our part, and we neither assume nor authorise any other person to assume for us any other liability in connection with the sale of our equipment. Faulty equipment must be returned, carriage paid, to our works for examination. Any legal action must be settled in the English courts under English law.

A worldwide network of agents supports Wynn's Marine product range. For details of the nearest Wynn agent please contact our Head Office. Wynn Agents operate in the following countries.

Argentina, Australia, Brazil, Canada, Chile, China, Croatia, Denmark, Egypt, Finland, France, Germany, Greece, Hong Kong, Iceland, India, Israel, Italy, Japan, Korea, Netherlands, New Zealand, Norway, Oman, Peru, Poland, Portugal, Russia, Singapore, South Africa, Spain, Sweden, Taiwan, Turkey, Ukraine, U.S.A.



Wynn Marine Ltd

2-4 Merse Road, North Moons Moat, Redditch, Worcestershire B98 9HL

Tel: +44 (0) 1527 61243, Fax: +44 (0) 1527 66836

Email: sales@wynn.co.uk, website www.wynn.co.uk