

RETURN BIDS TO:
RETOURNER LES SOUMISSIONS À:
Bid Receiving - PWGSC / Réception des soumissions -
TPSGC
11 Laurier St./11 rue Laurier
Place du Portage, Phase III
Core 0A1 / Noyau 0A1
Gatineau, Québec K1A 0S5

SOLICITATION AMENDMENT
MODIFICATION DE L'INVITATION

The referenced document is hereby revised; unless otherwise indicated, all other terms and conditions of the Solicitation remain the same.

Ce document est par la présente révisé; sauf indication contraire, les modalités de l'invitation demeurent les mêmes.

Comments - Commentaires

Vendor/Firm Name and Address
Raison sociale et adresse du
fournisseur/de l'entrepreneur

Issuing Office - Bureau de distribution
Construction Services Division/Division des services de
construction
11 Laurier St./11 Rue Laurier
3C2, Place du Portage
Phase III
Gatineau, Québec K1A 0S5

Title - Sujet Lockers / Showers Renovations...	
Solicitation No. - N° de l'invitation EP077-131060/A	Amendment No. - N° modif. 002
Client Reference No. - N° de référence du client R.042799.002	Date 2012-09-07
GETS Reference No. - N° de référence de SEAG PW-\$\$FG-347-61048	
File No. - N° de dossier fg347.EP077-131060	CCC No./N° CCC - FMS No./N° VME
Solicitation Closes - L'invitation prend fin at - à 02:00 PM on - le 2012-09-18	Time Zone Fuseau horaire Eastern Daylight Saving Time EDT
F.O.B. - F.A.B. Plant-Usine: <input type="checkbox"/> Destination: <input checked="" type="checkbox"/> Other-Autre: <input type="checkbox"/>	
Address Enquiries to: - Adresser toutes questions à: Boujenoui, Nabil	Buyer Id - Id de l'acheteur fg347
Telephone No. - N° de téléphone (819) 956-6145 ()	FAX No. - N° de FAX (819) 956-8335
Destination - of Goods, Services, and Construction: Destination - des biens, services et construction: PWGSC, NCA (Ottawa), Phase III, PdP, 11 Laurier st., Gatineau, QC, K1A-0S5	

Instructions: See Herein

Instructions: Voir aux présentes

Delivery Required - Livraison exigée	Delivery Offered - Livraison proposée
Vendor/Firm Name and Address Raison sociale et adresse du fournisseur/de l'entrepreneur	
Telephone No. - N° de téléphone Facsimile No. - N° de télécopieur	
Name and title of person authorized to sign on behalf of Vendor/Firm (type or print) Nom et titre de la personne autorisée à signer au nom du fournisseur/ de l'entrepreneur (taper ou écrire en caractères d'imprimerie)	
Signature	Date

Solicitation No. - N° de l'invitation

EP077-131060/A

Client Ref. No. - N° de réf. du client

R.042799.002

Amd. No. - N° de la modif.

002

File No. - N° du dossier

fg347EP077-131060

Buyer ID - Id de l'acheteur

fg347

CCC No./N° CCC - FMS No/ N° VME

This Solicitation Amendment number 002 is raised to:

- 1) Extend the closing date of this solicitation 2:00pm on September 18, 2012.
- 2) To issue addendum #1 attached hereto:

ALL OTHER TERMS AND CONDITIONS REMAIN UNCHANGED.

Solicitation No. - N° de l'invitation

EP077-131060/A

Client Ref. No. - N° de réf. du client

R.042799.002

Amd. No. - N° de la modif.

002

File No. - N° du dossier

fg347EP077-131060

Buyer ID - Id de l'acheteur

fg347

CCC No./N° CCC - FMS No/ N° VME

Addendum #1

DND LOCKERS/SHOWERS RENOVATION

Project No. R.042799.002

Page 1 of 6

DATE: September 07, 2012

The following changes in the tender documents are effective immediately. This addendum will form part of the contract documents.

1.0 ARCHITECTURAL:

1.1 Specification:

1. Section 01 00 10 - General Instructions

.1 Clause 1.19.4

ADD MSK 1 and MSK 2 (attached) for clarification on the custom scaffolding and significant work access restrictions required to access the underside of the 5th floor slab. Shown are the existing mechanical ductwork and plumbing in the mechanical room directly below the 5th floor men's change room.

2. Section 09 30 13 – Ceramic Tiling

.1 DELETE Clause 2.1.1 and **ADD** new Clause 2.1.1 to read as follows:

Porcelain Floor tile Type **PT1**: 50 x 50 x 9 mm thick. Square edges. Integrally coloured throughout. Pattern, colour, texture and style as follows:

.1 One pattern, colour, texture, and style as selected by the Departmental Representative from manufacturer's standard, full, extended and custom range.

.2 Type 4, MR 1, frost resistant.

.3 Breaking strength to meet ASTM C648.

.4 Static Coefficient of Friction: ASTM C1028.

.1 Dry: 0.70

.2 Wet: 0.60

.5 Base: Install two stacked rows of floor tile PT1 for the base. Tiles to be laid up stack bond with base mortar joints to align with all tile joints above.

.6 Provide matching trims to suit application.

.2 DELETE Clause 2.3.1.1 and **ADD** new Clause 2.3.1.1 to read as follows:

Type **CT** (washroom and locker room walls): 75 x 152 x 6 mm thick. Pattern, colour, texture, and style as selected by the Departmental Representative from manufacturer's standard, full, extended and custom range.

.1 Type 1, MR 1, frost resistant.

.2 MOHS: 7.

.3 Laid up in stack bond pattern.

3. Section 09 51 13 – Acoustical Panel Ceilings

.1 DELETE Clause 2.1.1 and **ADD** new Clause 2.1.1 to read as follows:

DND LOCKERS/SHOWERS RENOVATION

Page 2 of 6

Project No. R.042799.002

DATE: September 07, 2012

TYPE AT: Acoustic panel units for exposed installation in existing suspended ceiling system: to ASTM E1264. Type IV, Form 1, Pattern E,G. Sizes as listed below. Class A.

- .1 Light reflectance range of 0.80 - 0.89.
- .2 Ceiling plenum sound transmission range (CAC) of 0.35 - 0.40.
- .3 Noise reduction coefficient (NRC) designation of 0.60 - 0.70.
- .4 Surface burning characteristics to ASTM E84 as follows: Class A.
 - .1 Flame spread rating: 25.
 - .2 Smoke developed: 50.
- .5 Surface texture: smooth.
- .6 Colour: white.
- .7 Sizes and styles: 610 x 1524 x 19mm. Square edge.

4. Section 10 21 20 – Solid Phenolic Shower and Dressing Partitions

- .1 **DELETE** Clause 2.2.4.5 and **ADD** new Clause 2.2.4.5 to read as follows:
Coat Hook: 50 x 50mm overall size with 40mm projection from wall. Flat face, vertical orientation of hook. Heavy duty, all welded construction. Satin stainless steel. 2 piece mounting bracket consisting of 1.2 mm thick stainless steel welded inside flange and 1.0 mm thick stainless steel wall plate. Stainless steel set screw. Quantity: 1 per shower stall.

5. Section 10 28 10 – Toilet and Bath Accessories

- .1 **DELETE** Clause 2.2.6 and **ADD** new Clause 2.2.6 to read as follows:
Coat Hook: solid stainless steel construction. 50 x 50 mm overall size with 40 mm projection from wall. Flat face, vertical orientation of hook. Heavy duty, all welded construction. 35 x 35 x 3.6 mm thick rectangular stainless steel cap welded to support arm. Satin stainless steel. 2 piece mounting bracket consisting of 1.2 mm thick stainless steel welded inside flange and 1.6 mm thick stainless steel wall plate. Stainless steel set screw.
- .2 **DELETE** Clause 3.2.7 and **ADD** new Clause 3.2.7 to read as follows:
Grab Bars: Two grab bars at one urinal. 2 at 610mm long mounted vertically at each side of urinal.
- .3 **DELETE** Clause 3.2.9 and **ADD** new Clause 3.2.9 to read as follows:
Robe Hook: Provide one in each toilet compartment.

1.2 Drawings:

1. Drawing A200

- .1 **DELETE** Note 41 and **ADD** new Note 41 to read:
Part of inaccessible removable radiator panel behind new wall to be cut and modified to become a fixed panel. Add new 50x50mm horizontal and vertical steel angle


bracing within the existing radiator enclosure to support new fixed panel. Remainder of panel to remain removable and accessible.

2. Drawing A300

- .1 **DELETE** Note 4 and **ADD** new Note 4 to read:
Patch, sand, prepare, and electrostatic paint perimeter rad covers.

3. Drawing 9/A301

- .1 **ADD** new dimension to slab as shown below:

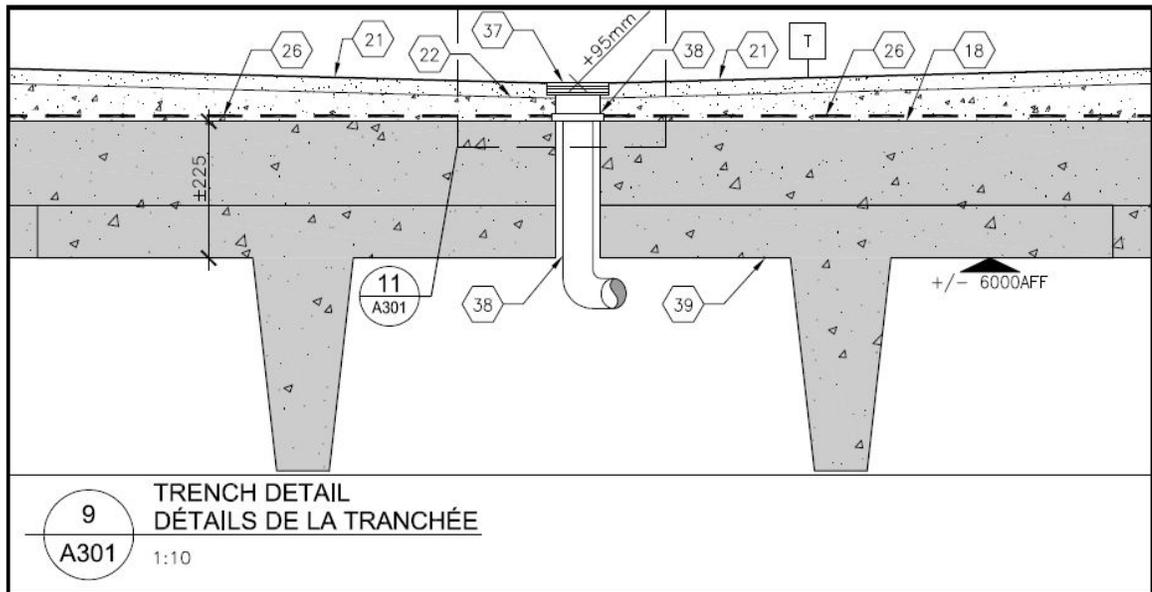

2.0 MECHANICAL

2.1 Specification:

1. Section 21 05 01 - Common Work Results for Mechanical

- .1 **ADD** new Clause 3.6 Work Access Restrictions:
Refer to MSK 1 and MSK 2 (attached) for clarification on the significant access restrictions required to access the underside of the 5th floor slab. Shown are the existing mechanical ductwork and plumbing in the mechanical room directly below the 5th floor men's change room.

2.2 Drawings:

1. Drawing M300

- .1 **DELETE** General Note F and **ADD** new General Note F to read:
Deep scan or X-ray top and bottom of slab for any penetrations through floor, not limited to shower drains, floor drains, toilet drain, urinal drains, and lavatory drains. Ensure no re-bar is cut or compromised.



