
Project: HMCS CARLETON

Issued: June 07, 2013.

Owner: DND

GRC Project No.:

2509

The following clarification relates to the specifications and drawings previously issued.

1. Attachments:

1) Specifications

1. N/A
2. N/A
3. N/A
4. N/A

1) Documents/Drawings:

Architectural

1. Architectural addendum ADDN-337-003- dated June 07, 2013.
2. Architectural addendum ADDN-333-001- dated June 07, 2013.

2. Description:

1) Specification

1. Reference to Section 07 52 00 MODIFIED BITUMINOUS MEMBRANE ROOFING:
 - Revise 2.02.1 to read, ***“Base sheet: to CGSB 37-GP-56M, minimum 2.5mm thickness composite reinforced Styrene-Butadiene-Styrene (SBS) base with thermofusible facings.”***
 - Revise 2.02.3 to read, ***“Flashing base sheet: to CGSB 37-GP-56M, minimum 2.5mm thickness composite reinforced Styrene-Butadiene-Styrene...”***
 - Add new clause 2.02.5 to read, ***“Flashing cap sheet: to CGSB 37-GP-56M, minimum 3.5mm thickness composite reinforced Styrene-Butadiene-Styrene with thermofusible backing and highly reflective granulated surface.”***
 - Revise 2.09.1 to read, ***“Semi-rigid asphaltic board comprised of saturated fiberglass felt on each side of mineral fortified asphaltic core, nominal 3mm thickness.”***
 - Revise 3.04.6.1 to read, ***“Unroll and adhere weld sheet as per manufacturer’s instructions.”***
 - ***Revise 3.04.9.1 to read, “Adhere base sheet onto substrates.”***
-

-
- Revise 3.04.9.2 to read, ***“Lap base sheet to membrane base sheet minimum 150 mm and seal.”***
 - Revise 3.04.9.3 to read, ***“Lap cap sheet to membrane cap sheet 150 mm minimum and weld.”***
2. Reference to Section 05 50 00
- ***Delete 2.09 and 3.06 in their entirety***
3. Reference to Section 10 28 10
- Revise 2.03.2 to read, ***“Paper Towel/Waste receptacle: surface and recessed mounted wall units supplied by DCC Representative and installed by Contractor.”***
 - Revise 3.02.5 to read, ***“Paper towel dispenser: as indicated”***
4. Reference to Section 10 14 00– Interior Wayfinding Signage
- Add new clause 3.01.4 to read, ***“Supply and Install 1 door plate for each interior door. A total of 100 wall plates to be provided by Contractor and installed where directed by DCC Representative.”***

2) Documents/Drawings:

Architectural


1. Revised notes for parapet details.
2. Revised note.

END OF TENDER ADDENDUM 004.

Prepared By:



Danny Ding

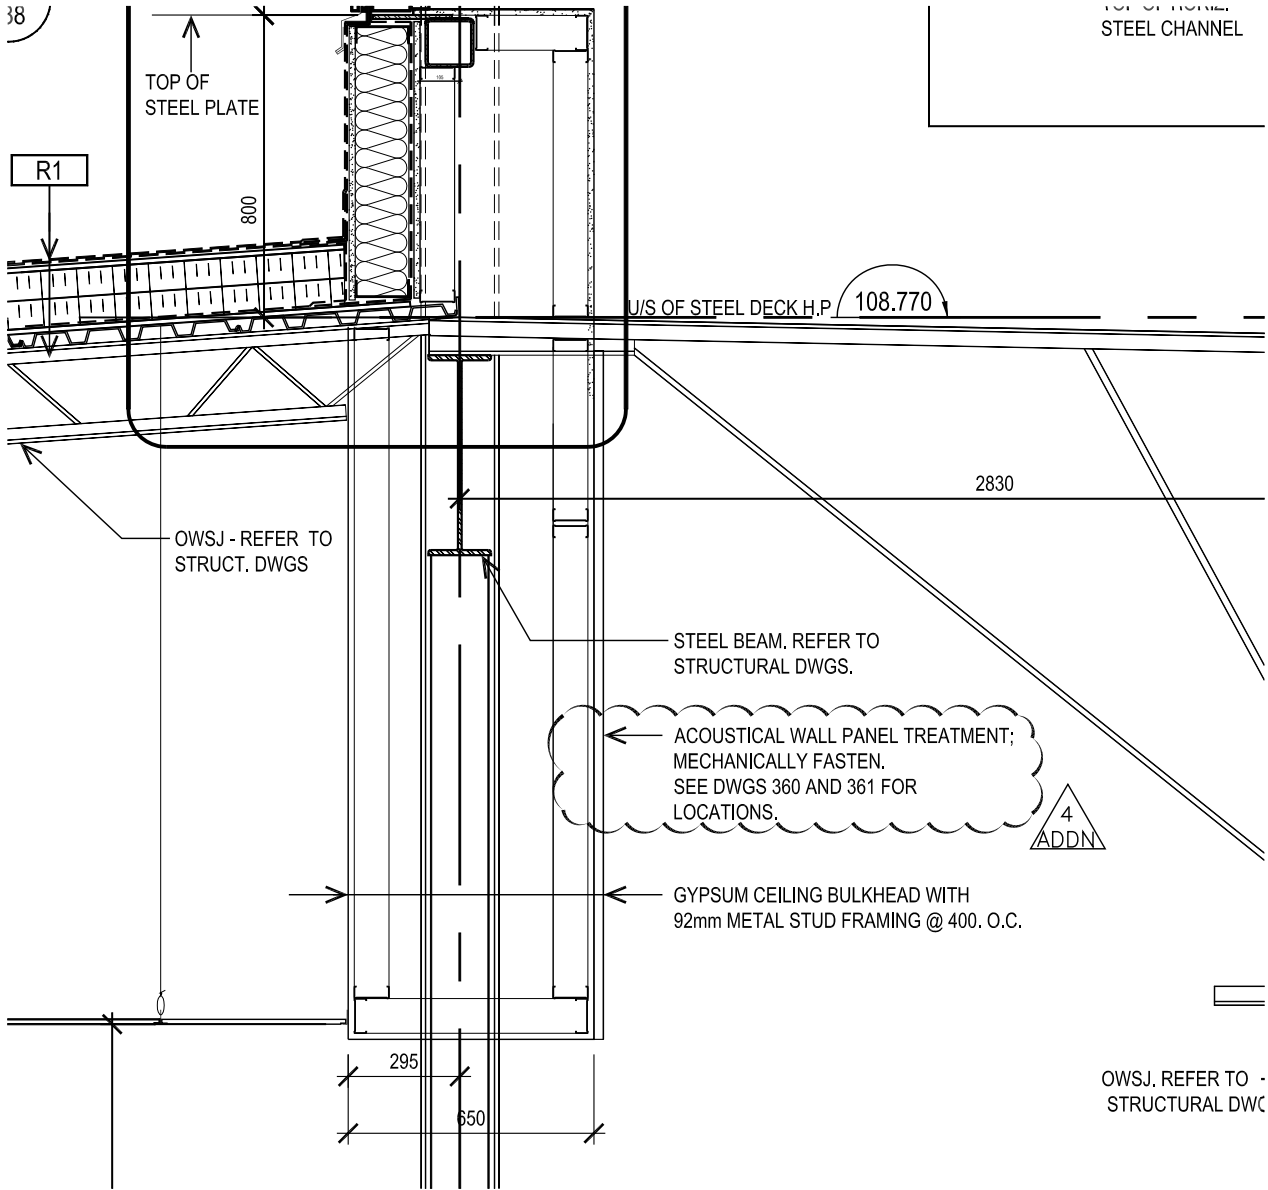

grc architects

47 Clarence Street, Suite 401,
Ottawa, Ontario K1N 9K1
t:613.241.8203, f:613.241.4180
info@grcarchitects.com www.grcarchitects.com

Job Title

HMCS-CARLETON REPLACEMENT

Drawing Description

WALL SECTION

Job No.

2509

Date

June 07, 2013

Drawn By

D.D

Drawing Number

ADDN-333-001