



PLAN
1:500

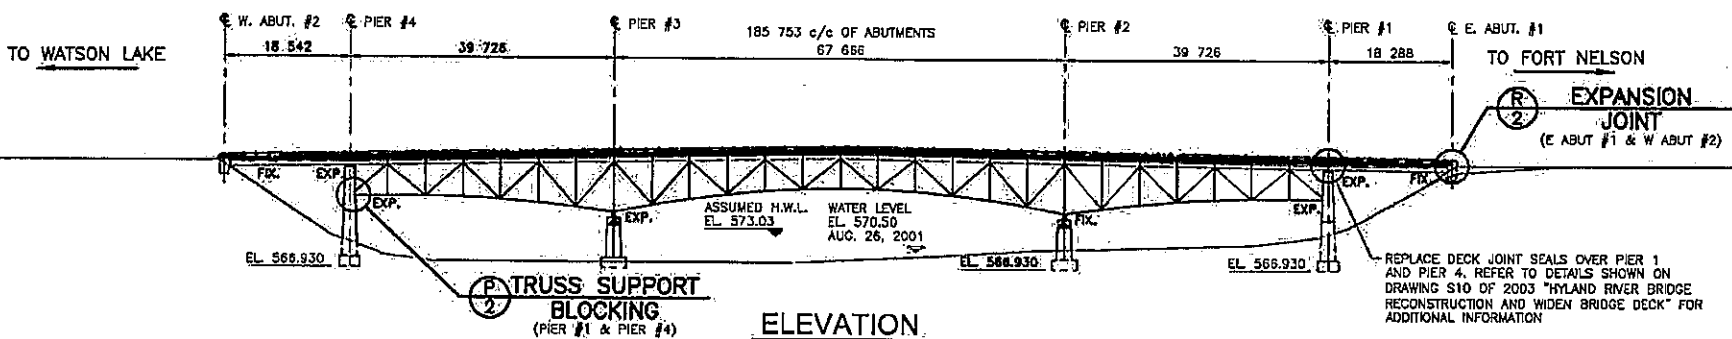

ELEVATION
1:500

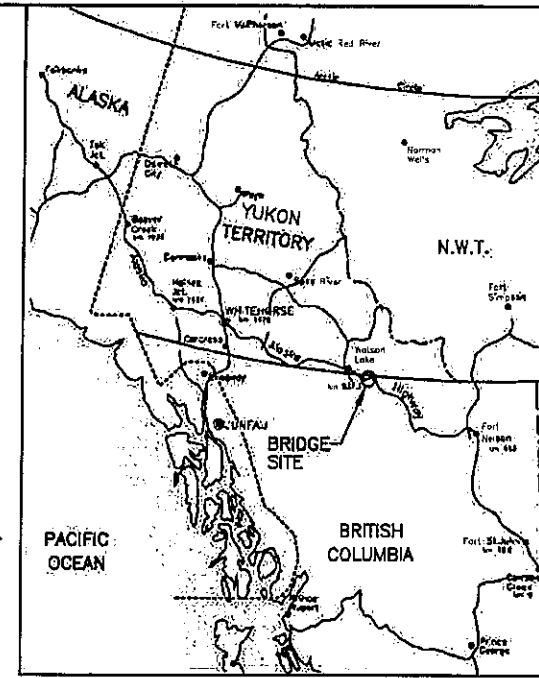

LOCATION MAP
NTS

GENERAL NOTES

1. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS NOTED OTHERWISE
2. SCALED DIMENSIONS ACCURATE ON FULL SIZE (594 mm x 841 mm) "A1" SIZE DRAWING ONLY
3. MATERIAL: ALL STEEL SHALL MEET THE REQUIREMENTS OF CSA G40.21M GRADE 350A OR A.S.T.M A709 GRADE 345 WT TYPE B
4. ALL BOLTED CONNECTIONS SHALL BE MADE WITH HIGH STRENGTH BOLTS CONFORMING TO ASTM A214M TYPE 3
5. ALL BOLT HOLES SHALL BE 3 mm LARGER THAN BOLT DIAMETER
6. ALL WELD METAL DEPOSITS SHALL HAVE A CHARPY V NOTCH IMPACT STRENGTH OF AT LEAST 27 JOULES AT -30°C
7. AFTER FABRICATION ALL STEEL COMPONENTS SHALL BE HOT DIPPED GALVANIZED IN ACCORDANCE WITH SPECIFICATION CSA G184
8. GALVANIZED STEEL COMPONENTS AND STAINLESS STEEL BOLTS SHALL CONFORM TO A151 TYPE 316
9. SUBMIT REPAIR PROCEDURE TO CONSULTANT FOR REVIEW
10. DIMENSIONS AND ELEVATIONS SHOWN ON THESE DRAWINGS HAVE BEEN OBTAINED FROM REFERENCE DRAWINGS. PRIOR TO PREPARATION OF FABRICATION DRAWINGS OR ON-SITE CONSTRUCTION, THE CONTRACTOR SHALL FIELD MEASURE DIMENSIONS OF ALL EXISTING COMPONENTS WHICH ARE AFFECTED BY OR WILL AFFECT THE NEW CONSTRUCTION WORK. FIELD MEASURED DATA SHALL BE USED

Public Works and Government Services Canada
REAL PROPERTY SERVICES
Pacific Region
SERVICES IMMOBILIERS
Région de Pacifique

GENIVAR

7115 EDGAR INDUSTRIAL COURT
VICTORIA B.C. V8N 4C2
TEL: 403-383-1500 FAX: 403-383-1501 WWW.GENIVAR.COM



1		
2		
3		
4		
5		
6		
7		
8		
9		
10		

PUBLIC WORKS AND GOVERNMENT SERVICES CANADA
REAL PROPERTY SERVICES
PACIFIC REGION

Project Title/Date: 2013
ALASKA HIGHWAY, km 937.3
BRITISH COLUMBIA

**HYLAND RIVER BRIDGE
DECK JOINT REPAIRS AND
TRUSS SUPPORT BLOCKING
INSTALLATION**

Consultant Signature Only
Designed by/Checked by:
MING JIAO - 20130915
Drawn by/Checked by:
MIM - 20130915
Project Manager/Supervisor/Inspector/Inspector:
ALEX TAYLOR
Project Manager/Inspector/Inspector/Inspector:
ALEX TAYLOR - 20130915

Drawing Title/Date/Revision
GENERAL LAYOUT

Project No./Rev. No.	Sheet No./Total	Revision No./Description
R.017173.031	1	0
	OF 2	