


SHEAVE ROOM



NOTES:

- CONCRETE SLAB REMOVAL IS REQUIRED IN ORDER TO FACILITATE REMOVAL OF EXISTING GEAR BOX STEEL PEDESTAL.
- EXISTING REINFORCEMENT SHALL BE CUT SO THAT IT PROTRUDES 6" (152mm) MINIMUM BEYOND LIMITS OF CONCRETE REMOVAL.
- FOR NEW CONCRETE SLAB DETAILS, SEE DRAWING S-08.
- FOR DETAILS OF NEW GEARBOX AND PEDESTAL, SEE THE MECHANICAL PLANS.
- THE TEMPORARY SHIELDING SHALL BE DESIGNED AND DETAILED BY THE CONTRACTOR AND SUBMITTED TO THE DEPARTMENTAL REPRESENTATIVE FOR REVIEW. THE TEMPORARY SHIELDING SHALL BE DESIGNED TO SUPPORT A LIVE LOAD OF AT LEAST 115 POUNDS PER SQUARE FOOT (5.5 kN/m²) AND SHALL BE INSTALLED PRIOR TO SLAB REMOVAL. TEMPORARY SHIELDING SHALL ALSO ACT AS A THERMAL BARRIER IN ORDER TO MAINTAIN ROOM TEMPERATURE INSIDE THE MOTOR ROOM
- FOR GENERAL DEMOLITION NOTES, SEE DRAWING S-03.

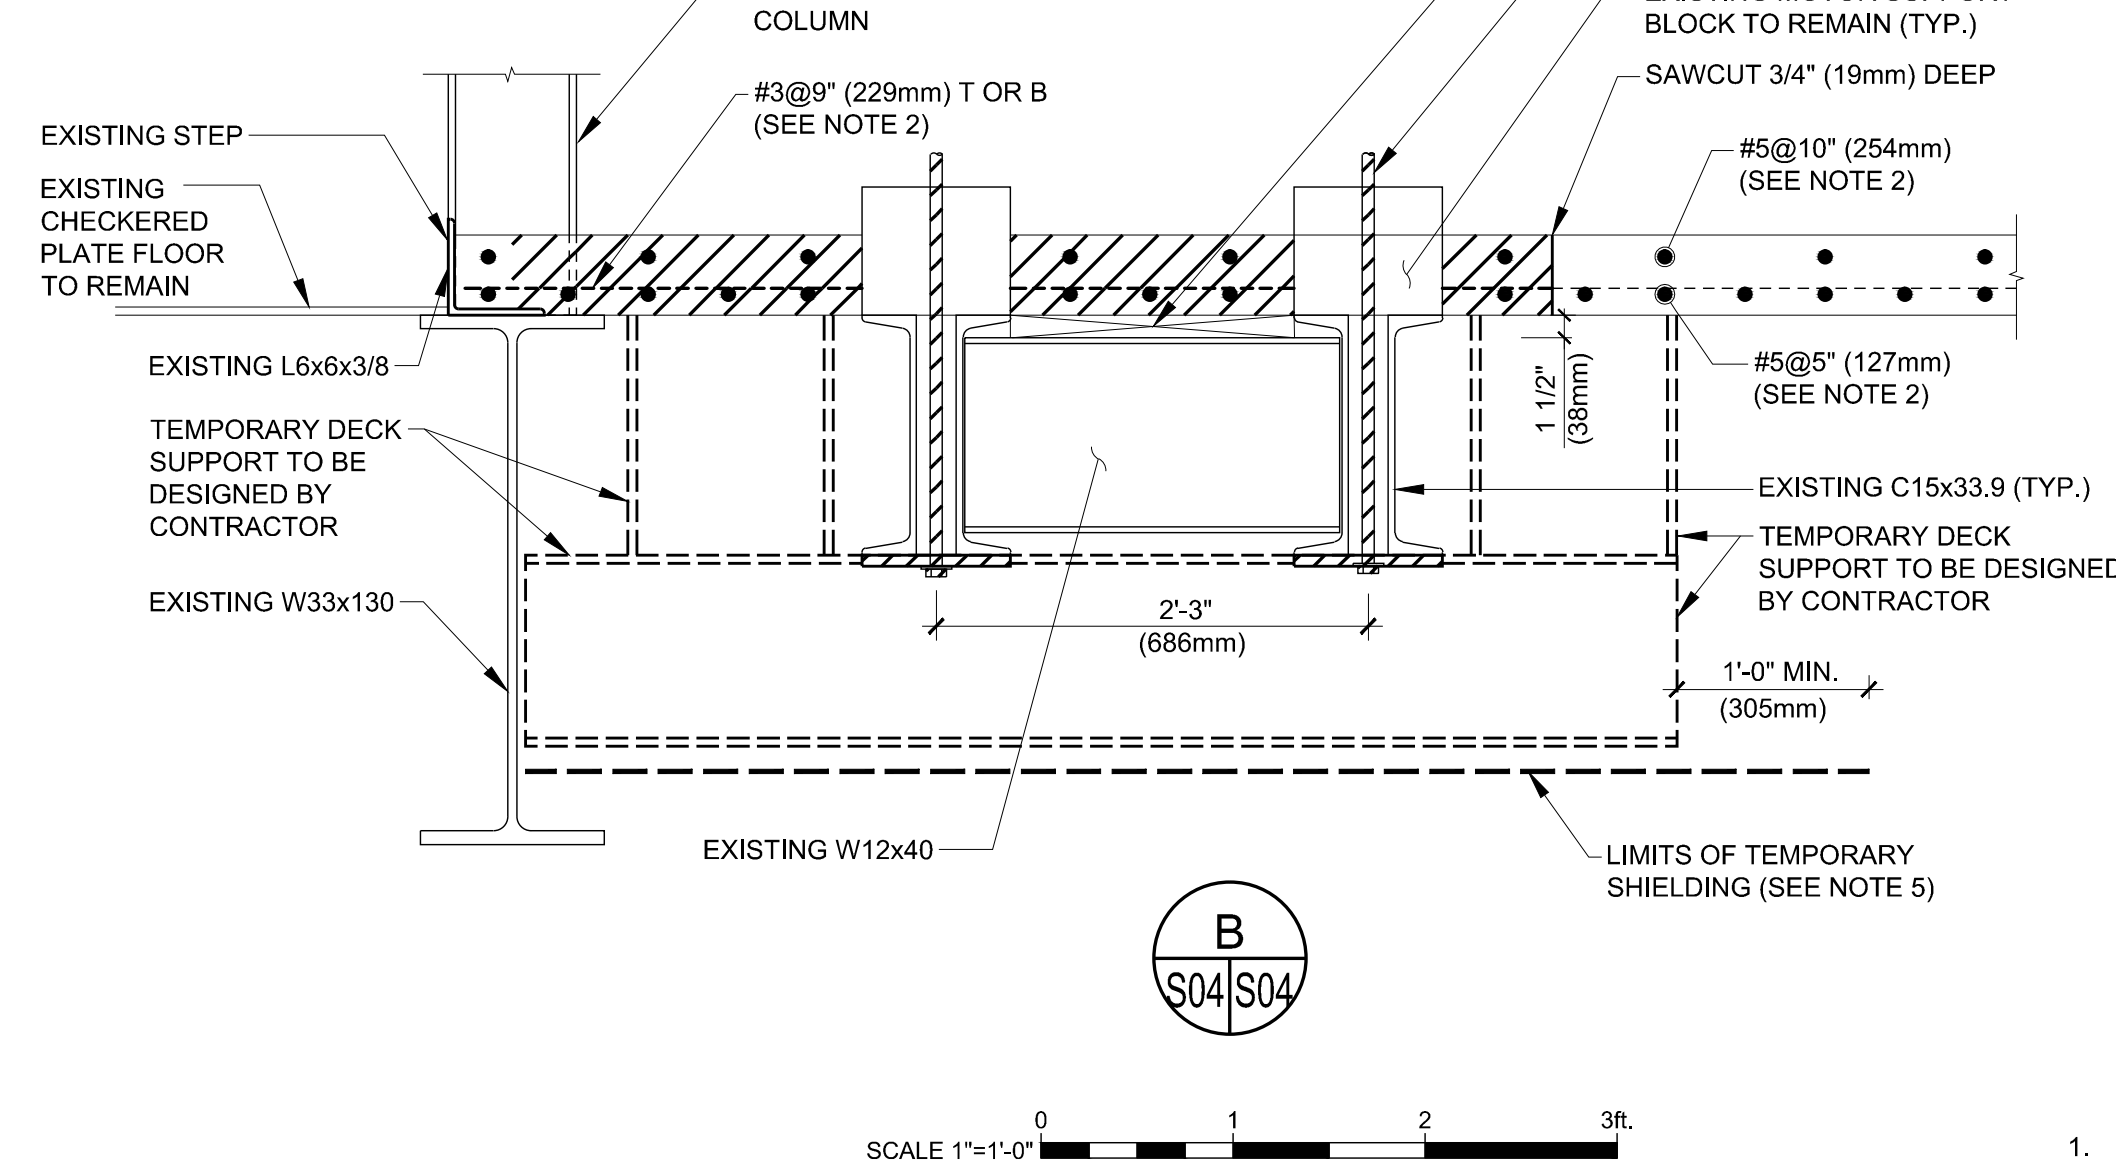

Public Works and
Government Services Canada
Architectural and Engineering Services
Ontario Region

Travaux publics et
Services gouvernementaux Canada
Services d'architecture et de génie
Région de l'Ontario

**PARSONS
BRINCKERHOFF**

2300 YONGE STREET, SUITE 2300
TORONTO, ONTARIO
CANADA M4P 1E4
PHONE: 416-487-5256 FAX: 416-487-9766
WWW.PBWORLD.COM



06	FOR TENDER	2013-06-04
05	FINAL DESIGN COMPLETION	2013-05-31
04	99% DESIGN COMPLETION	2013-05-31
03	90% DESIGN SUBMITTAL NOT FOR CONSTRUCTION	2013-03-31
02	66% DESIGN SUBMITTAL NOT FOR CONSTRUCTION	2013-02-14
01	33% DESIGN SUBMITTAL NOT FOR CONSTRUCTION	2012-12-10
revision		date

Do not scale drawings.
Verify all dimensions and conditions on site and
immediately notify the Departmental Representative
of all discrepancies.

A	Detail No. No. du détail
B	drawing no. - where detail required dessin no. - où détail exigé
C	drawing no. - where detailed dessin no. - où détaillé

project title
titre du projet
**HAMILTON ONTARIO
BURLINGTON CANAL
VERTICAL LIFT BRIDGE
REPLACEMENT OF CONTROLS,
DRIVES AND OVERHEAD CABLES**

drawing title
titre du dessin
DEMOLITION DETAILS -2-

drawn by
dessiné par
L. KHAZOVA

designed by
conc par
A. ZOLGHADRI/E. SKROBACZ

approved by
approuvé par
M. VANDEREE

bid
soumission
A. GHUBRIL

project manager
administrateur
de projets

project date
date du projet
2013-03-31

project no.
no. du projet
R.012641.001

drawing no.
dessiné no.
S-04

LEGEND

1. DENOTES REMOVAL.