

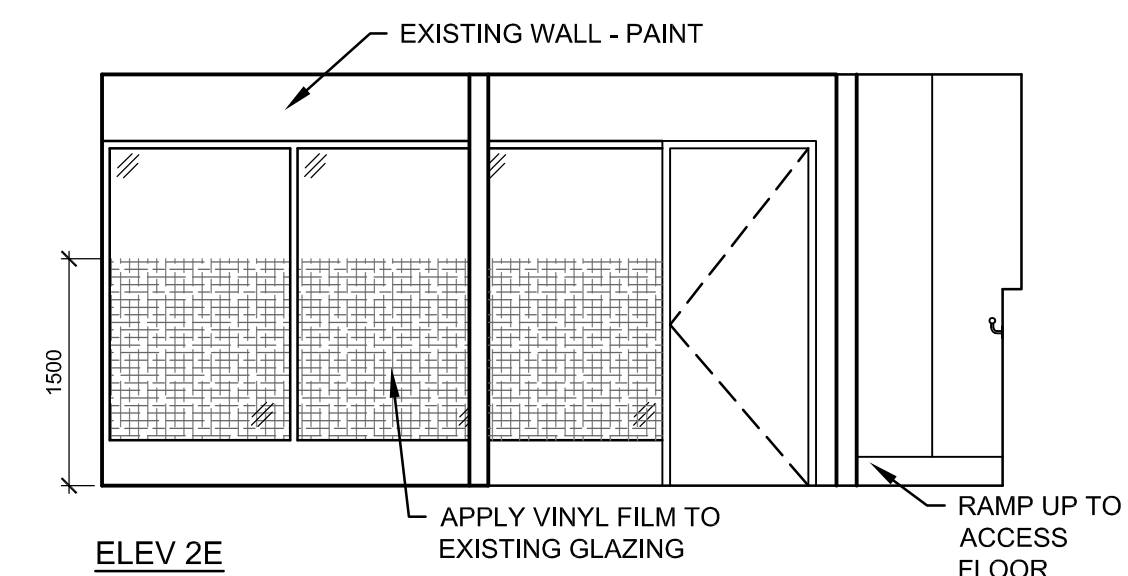
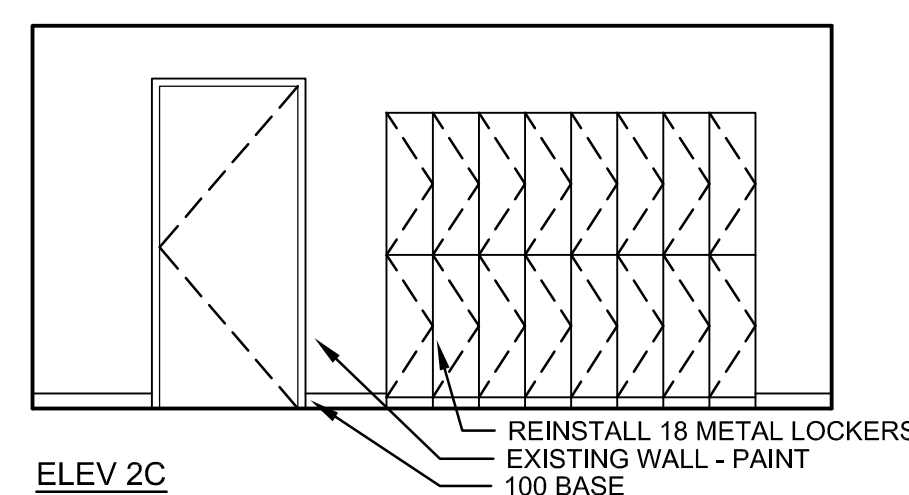
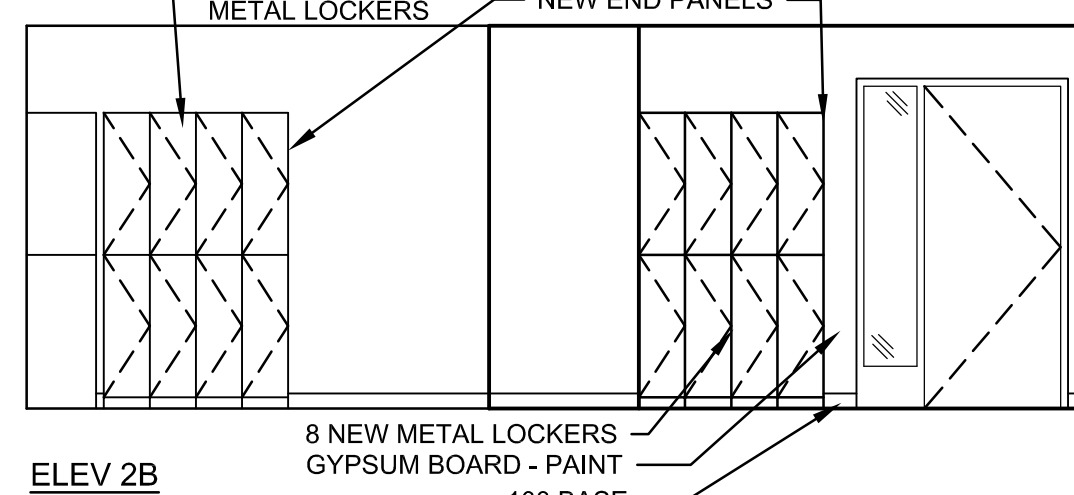


A1.4 A1.7 SCALE 1:50




EXISTING WALL - PAINT
NEW END PANEL

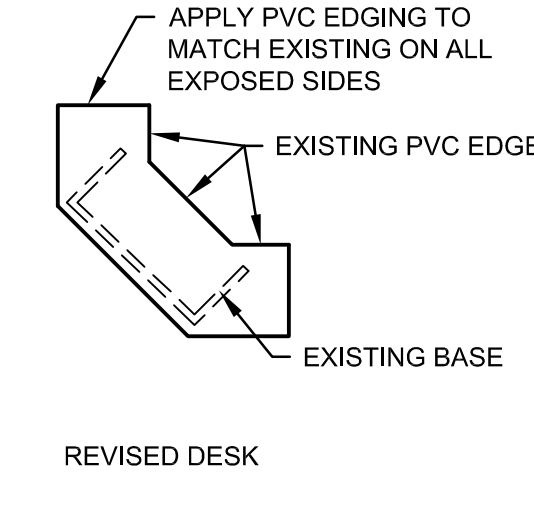

A1.4 A1.7 SCALE 1:50
EXISTING ELECTRICAL PANELS

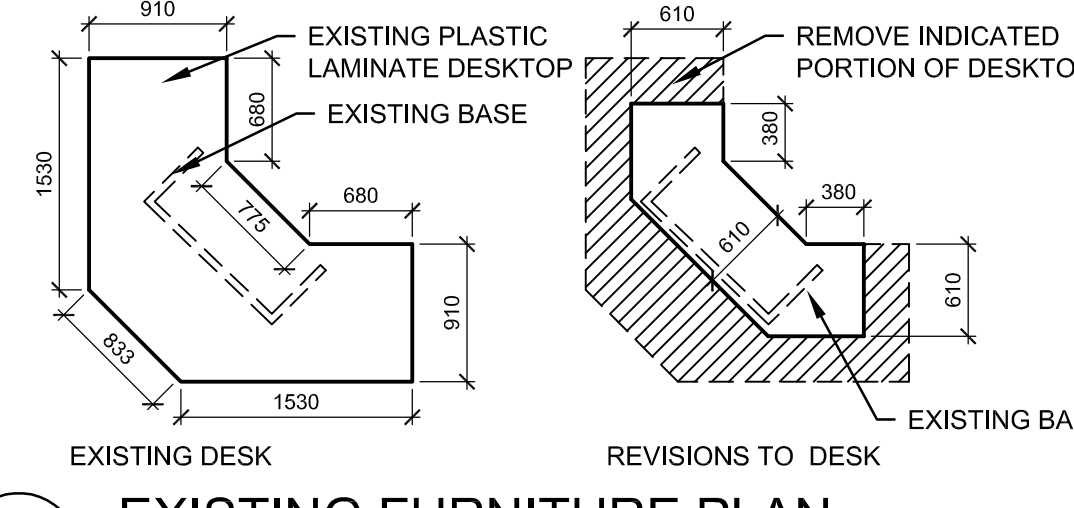

A1.4 A1.7 SCALE 1:50 610

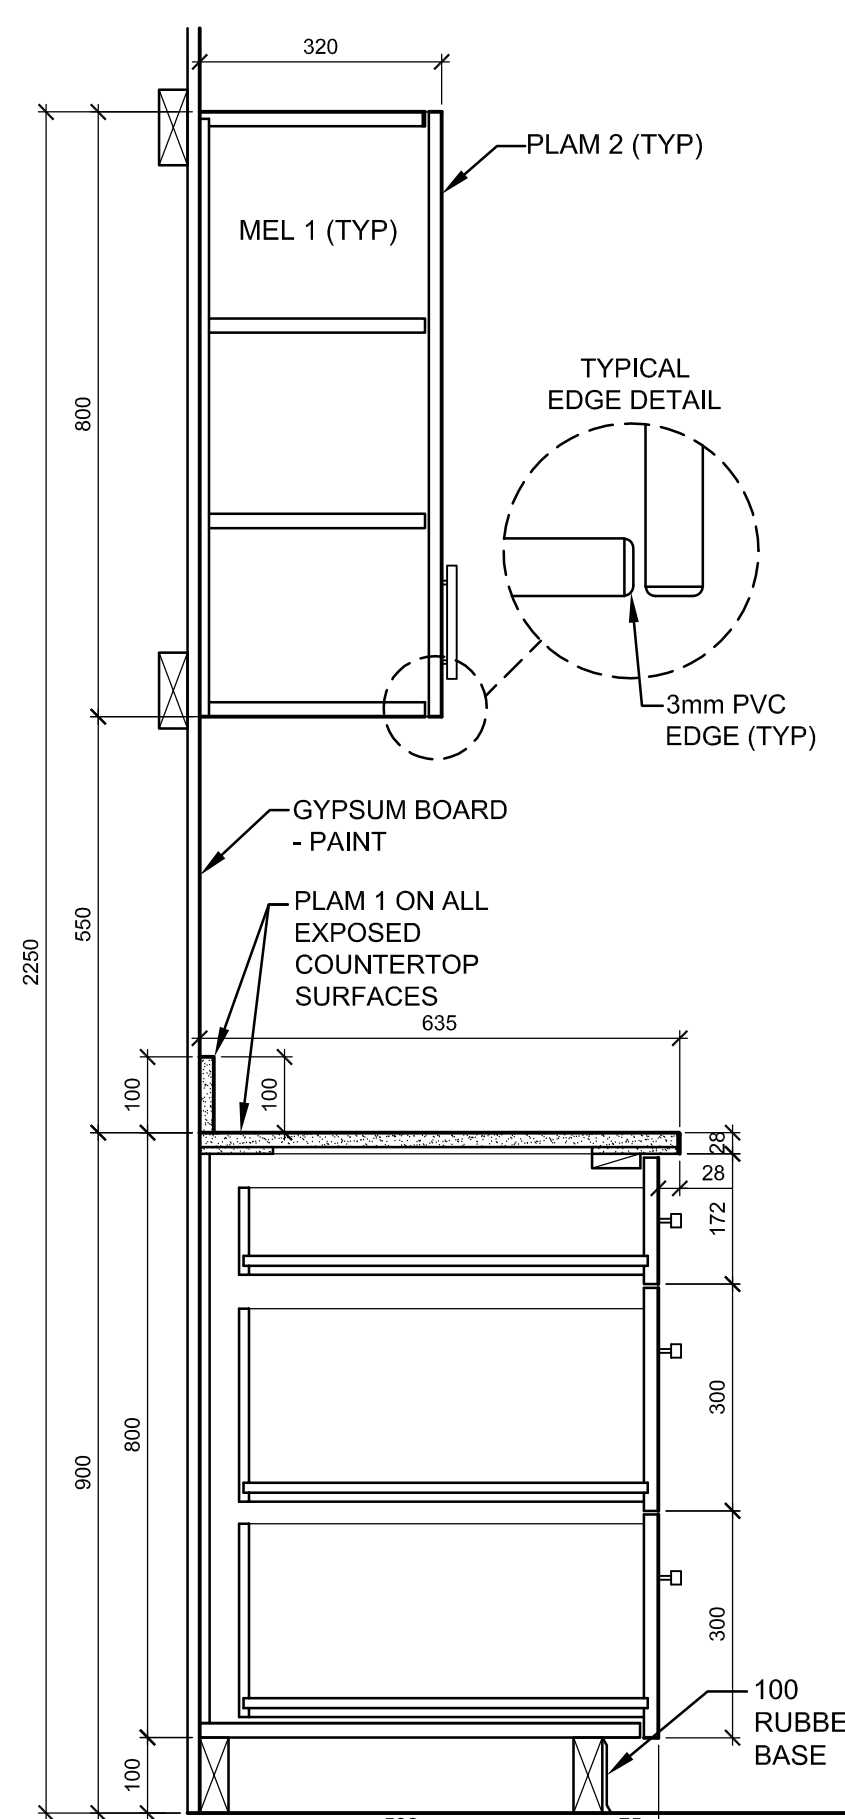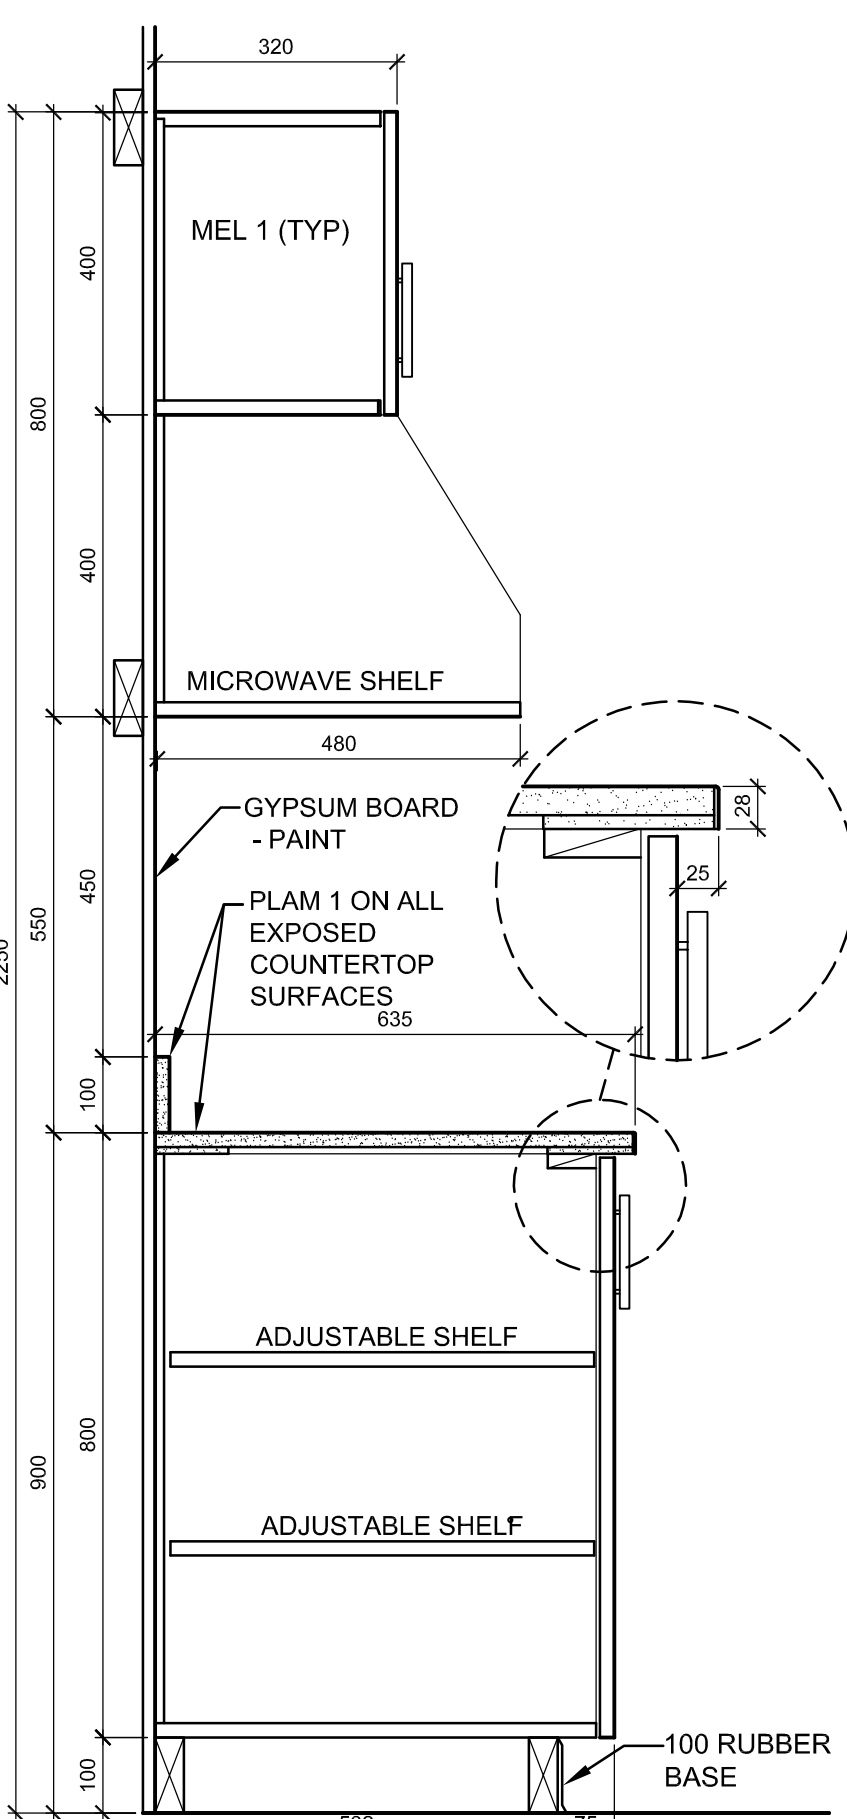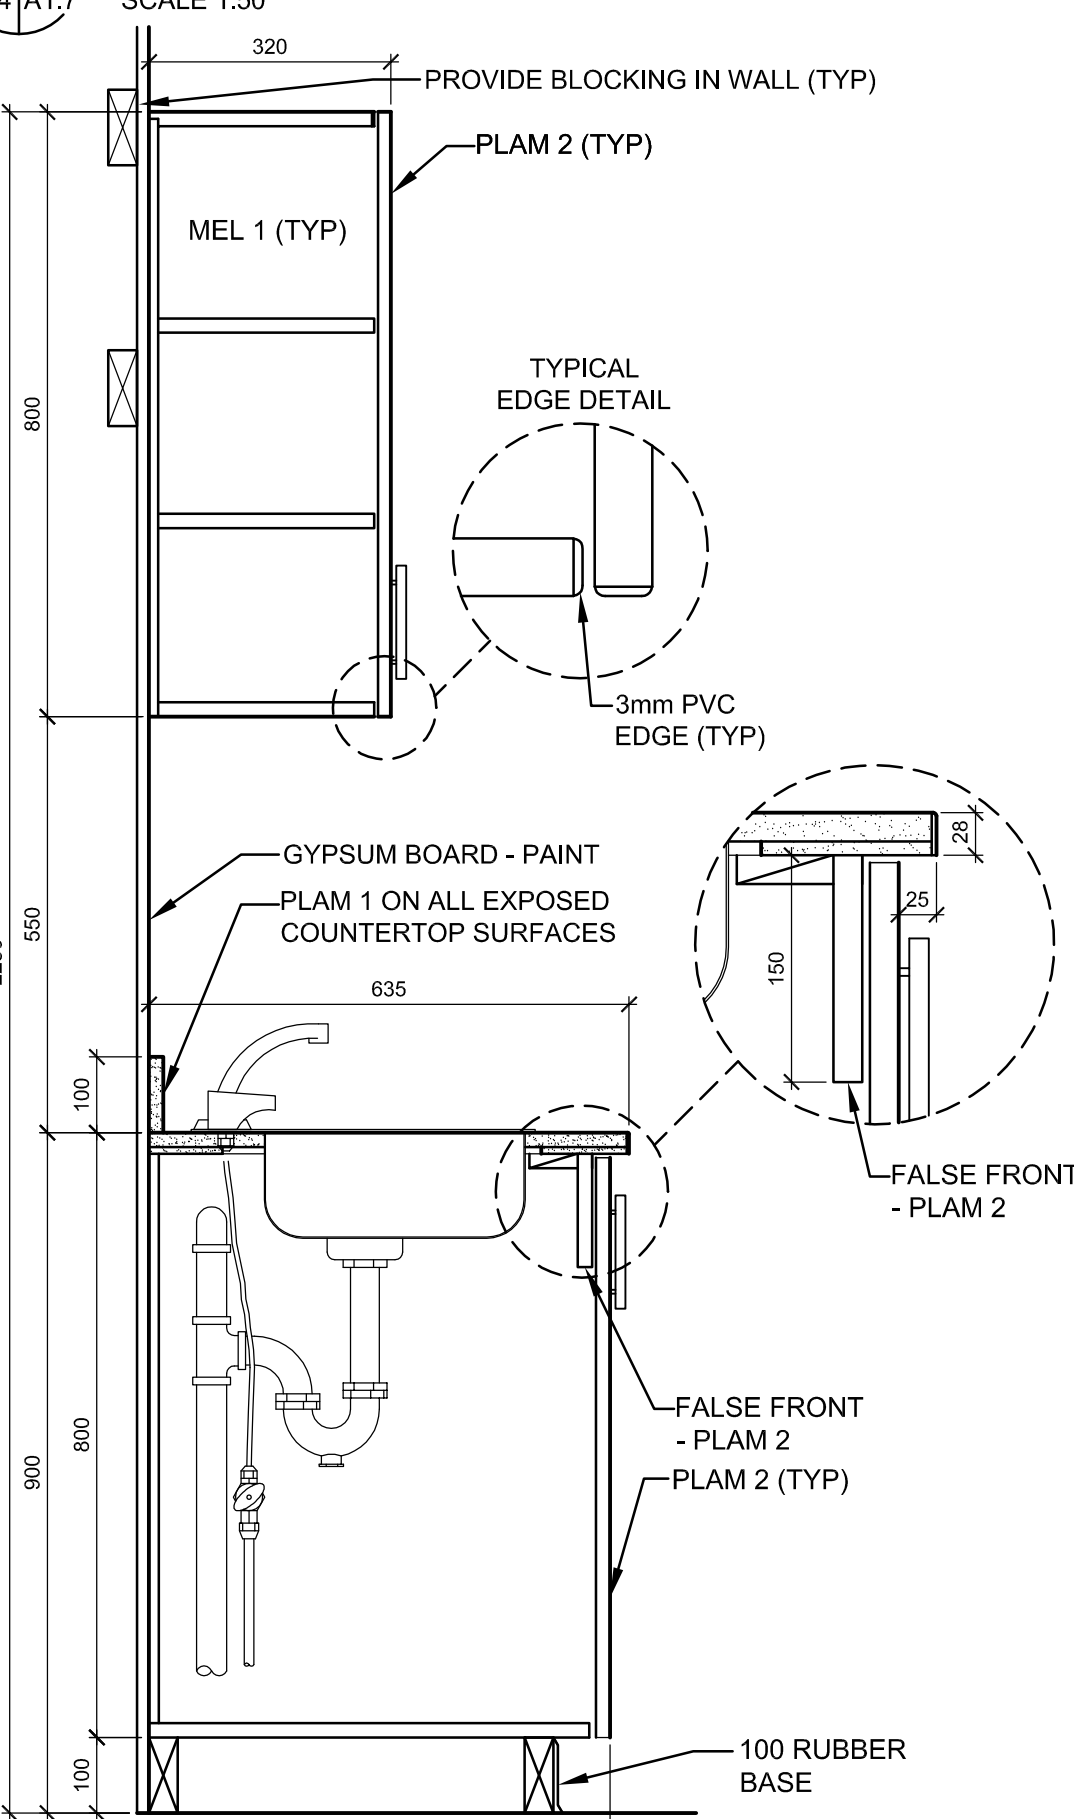

REFER TO DRAWING A0.2 ROOM FINISH SCHEDULE FOR LIST OF FINISHES

1. COUNTERTOPS, BACKSPLASH & NOSING:
 1. PLASTIC LAMINATE
 - 19mm PARTICLE BOARD C/W BUILT UP EDGES
 - PLASTIC LAMINATE COUNTERTOP
 - 3mm PVC EDGE
2. CABINET BODY, GABLES & FRAMES ETC.
 1. - 19mm PARTICLE BOARD SIDES WITH MELAMINE
 - 19mm PARTICLE BOARD BACKS WITH MELAMINE
 - ALL VISIBLE EXTERIOR SURFACES TO BE PLASTIC LAMINATE

INTERIORS:

 - 19mm MELAMINE
 - 13mm MELAMINE BACKS
3. ADJUSTABLE SHELVING:
 1. INTERIOR:
 - 19mm MELAMINE c/w 3mm PVC EDGE
4. CABINET DOORS:
 1. PLASTIC LAMINATE
 - 19mm PARTICLE BOARD WITH PLASTIC LAMINATE C/W 3mm PVC EDGE
5. DRAWERS & FALSE FRONTS:
 - 19mm PARTICLE BOARD WITH PLASTIC LAMINATE FRONTS C/W 3mm PVC EDGES
 - 12mm MELAMINE SUB FRONT, BACK & SIDES

C/W MATCHING EDGE TAPE

 - 6mm PRE-FINISHED HARDBOARD BOTTOMS TO MATCH MELAMINE
6. BASE: REFER TO INTERIOR ELEVATIONS FOR MATERIAL LOCATIONS

HINGES: CONCEALED SELF CLOSING

HINGES: CONCEALED SELF CLOSING

UPPER CABINETS - BLUM 110° HINGE OR EQUAL
BASE CABINETS - BLUM 170° HINGE OR EQUAL

SLIDES:

ACCURIDE 3832 FULL EXTENSION DRAWER SLIDES - MEDIUM DUTY
ACCURIDE 9301 FULL EXTENSION DRAWER SLIDES (150-500 LBS)

PULLS: RICHELIEU 7544160170 CONTEMPORARY STAINLESS STEEL

ADJUSTABLE SHELF SUPPORTS TO BE TRANSPARENT
c/w 5mm STEEL STUD #282-27.401

NOTE: ALL WORK TO BE DONE TO LATEST AWMAC STANDARDS
TYPICAL MILLWORK TO BE CUSTOM GRADE.

- 1.1 GENERAL NOTES**
1. ALL MILLWORK IS TO BE TYPICAL CONSTRUCTION UNLESS OTHERWISE NOTED ON ELEVATIONS AND DETAILS.
 2. ALL MELAMINE DOORS AND DRAWER FRONTS TO HAVE A MATCHING 3mm PVC EDGE. ALL MELAMINE IN CABINET INTERIORS TO HAVE MATCHING EDGE TAPE.
 3. ALL PLASTIC LAMINATE DRAWERS AND DOOR FRONTS TO HAVE 3mm PVC.
 4. SCRIBE COUNTER TO WALL & APPLY BEAD OF CLEAR SILICONE AT WALL/PLAM/SOLID SURFACE JOINTS
- MILLWORKER TO PROVIDE SHOP DRAWINGS FOR REVIEW BY CONSULTANT.



1	ISSUED FOR TENDER	2013-07-05
revisions	description	date
Client		

R.050172.002
FOR
PWGSC

project title

OFFICE RENOVATIONS

REGINA, SASKATCHEWAN

approved by
RB

designed by

LM

NG

PWGSC Project Manager
SK

PWGSC, Architectural and Engineering Resources Manager

Client

KL

drawing title
INTERIOR ELEVATIONS

INTERIOR ELEVATIONS

MILL WORK

HOMEWORK

project no.	sheet	revision no.
-------------	-------	--------------

R.050172.002	A1.7
--------------	------