



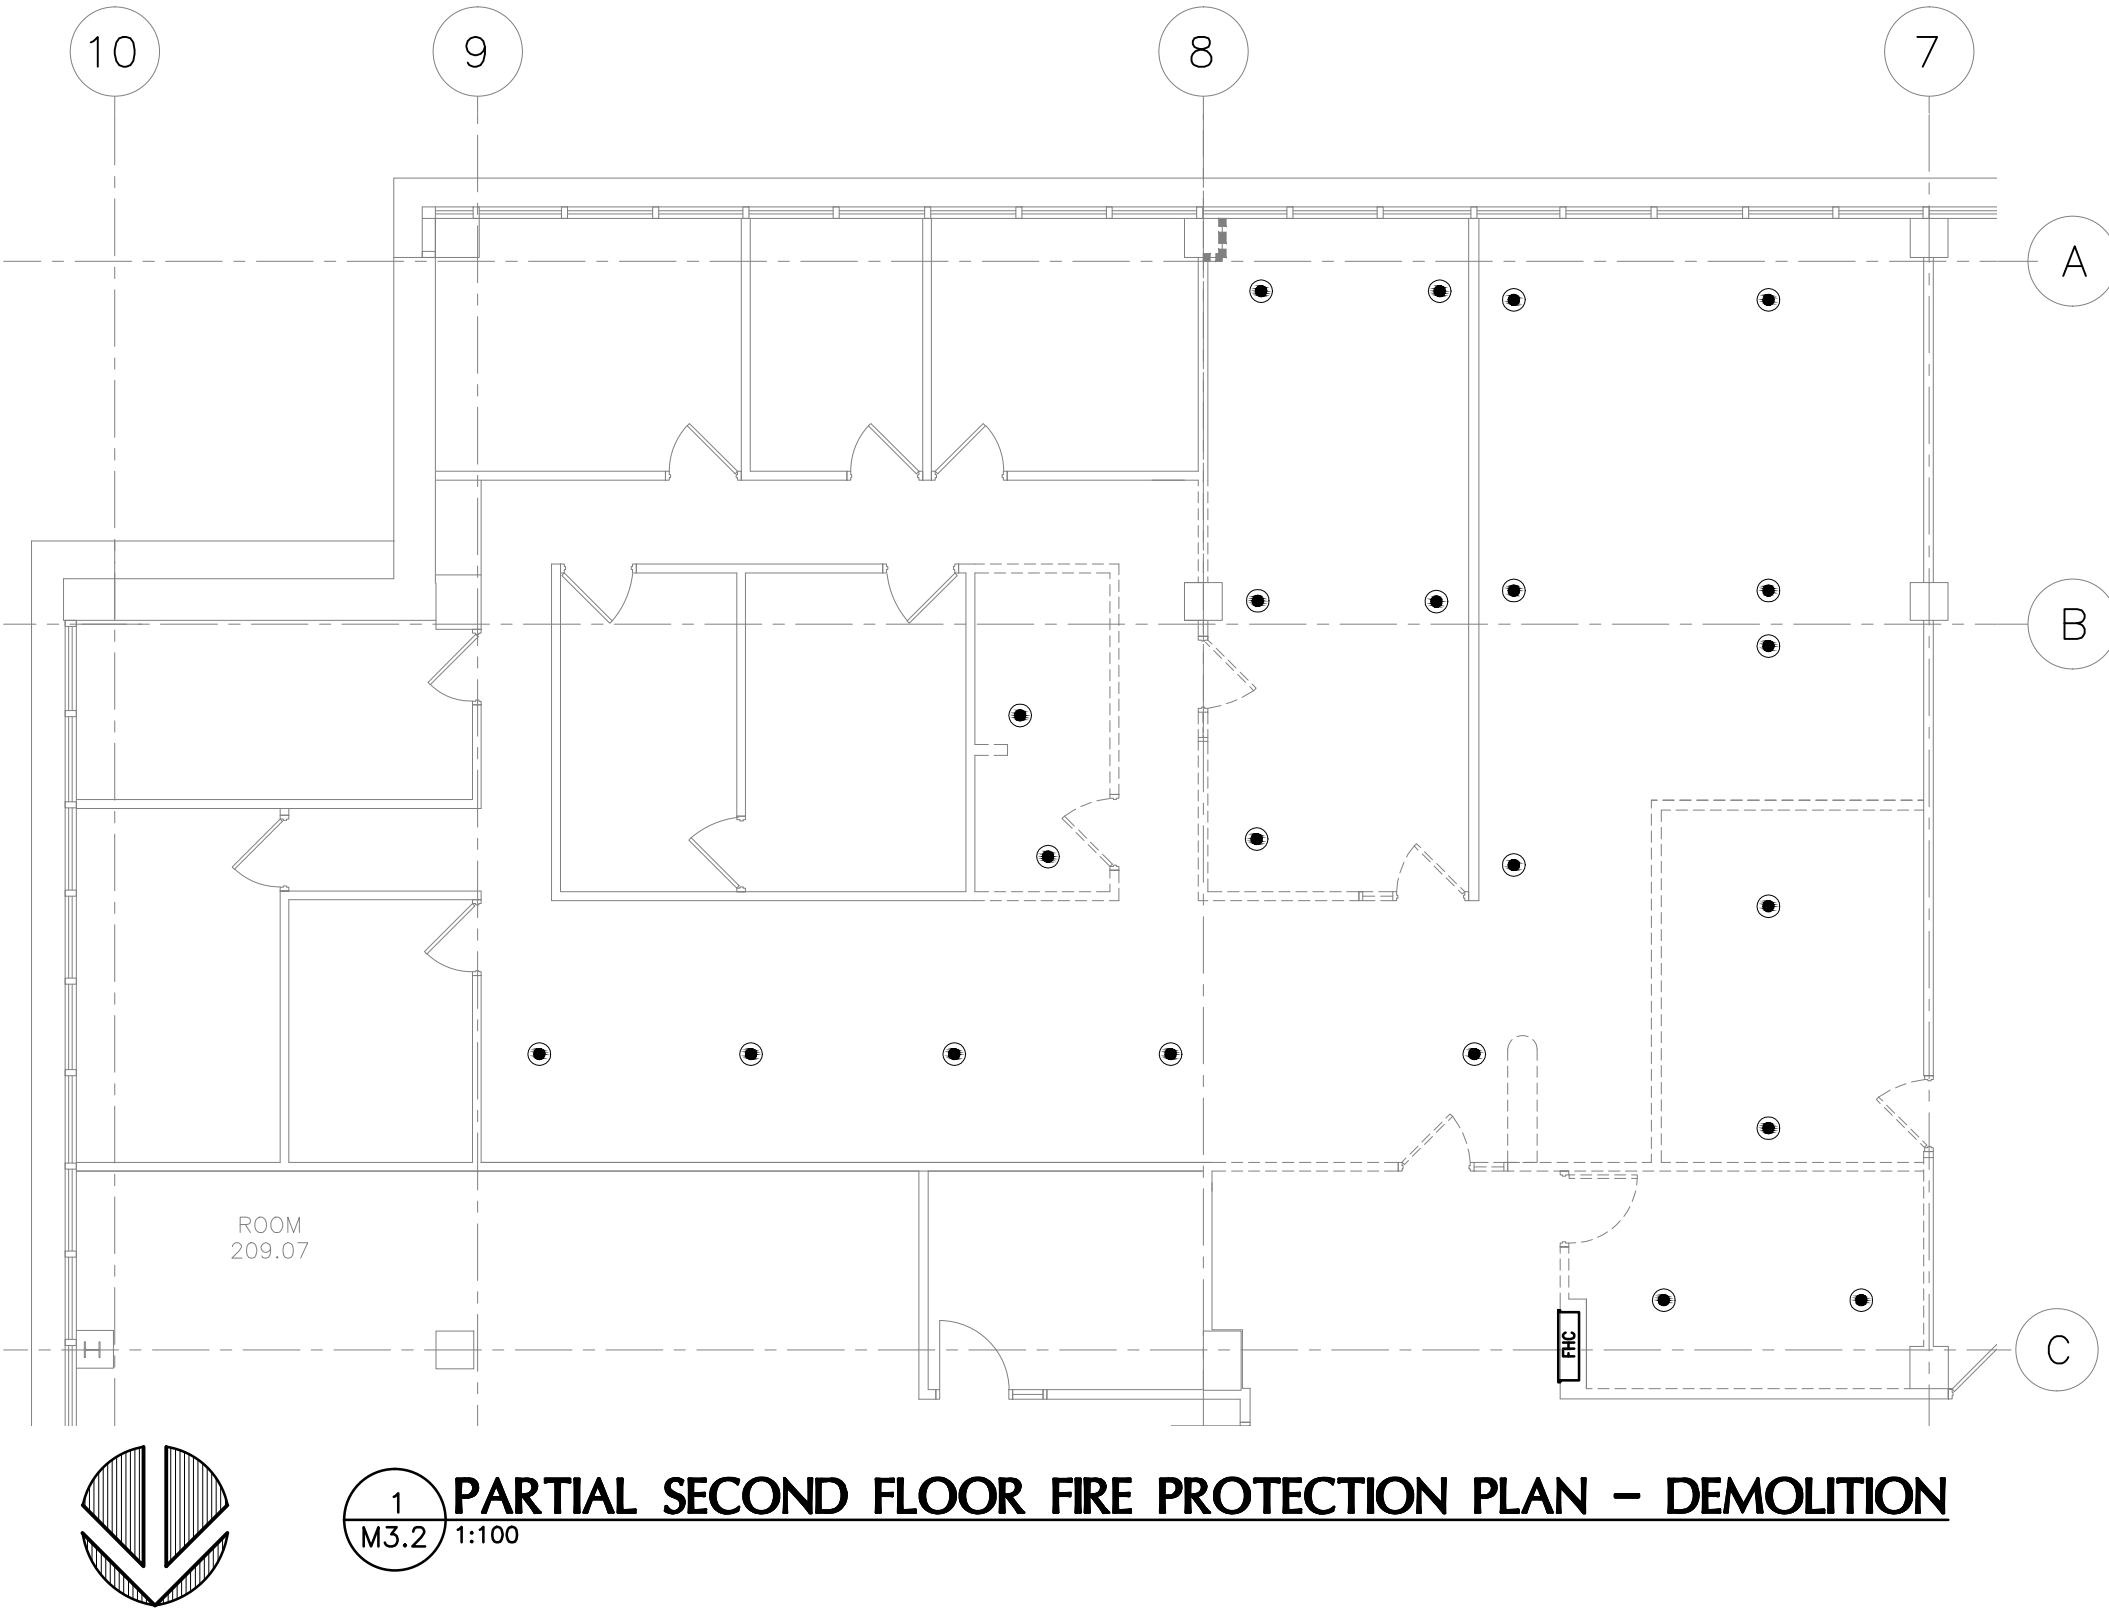


MacPHERSON
Engineering Inc.

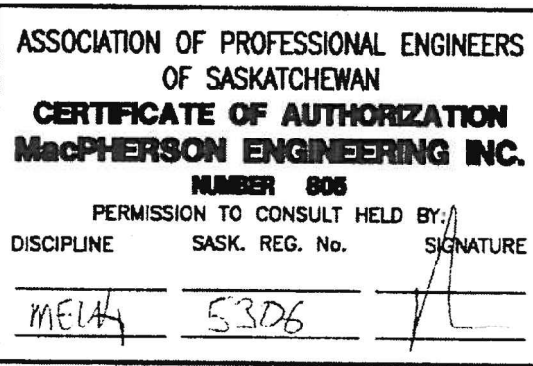

1 PARTIAL SECOND FLOOR FIRE PROTECTION PLAN – DEMOLITION
M3.2 1:100

LEGEND

- EXISTING PENDENT SPRINKLER HEAD TO REMAIN
- D EXISTING PENDENT SPRINKLER HEAD TO BE REMOVED / RELOCATED
- N NEW PENDENT SPRINKLER HEAD
- N NEW UPRIGHT SPRINKLER HEAD
- ⊗ INSTALL NEW FIRE EXTINGUISHER

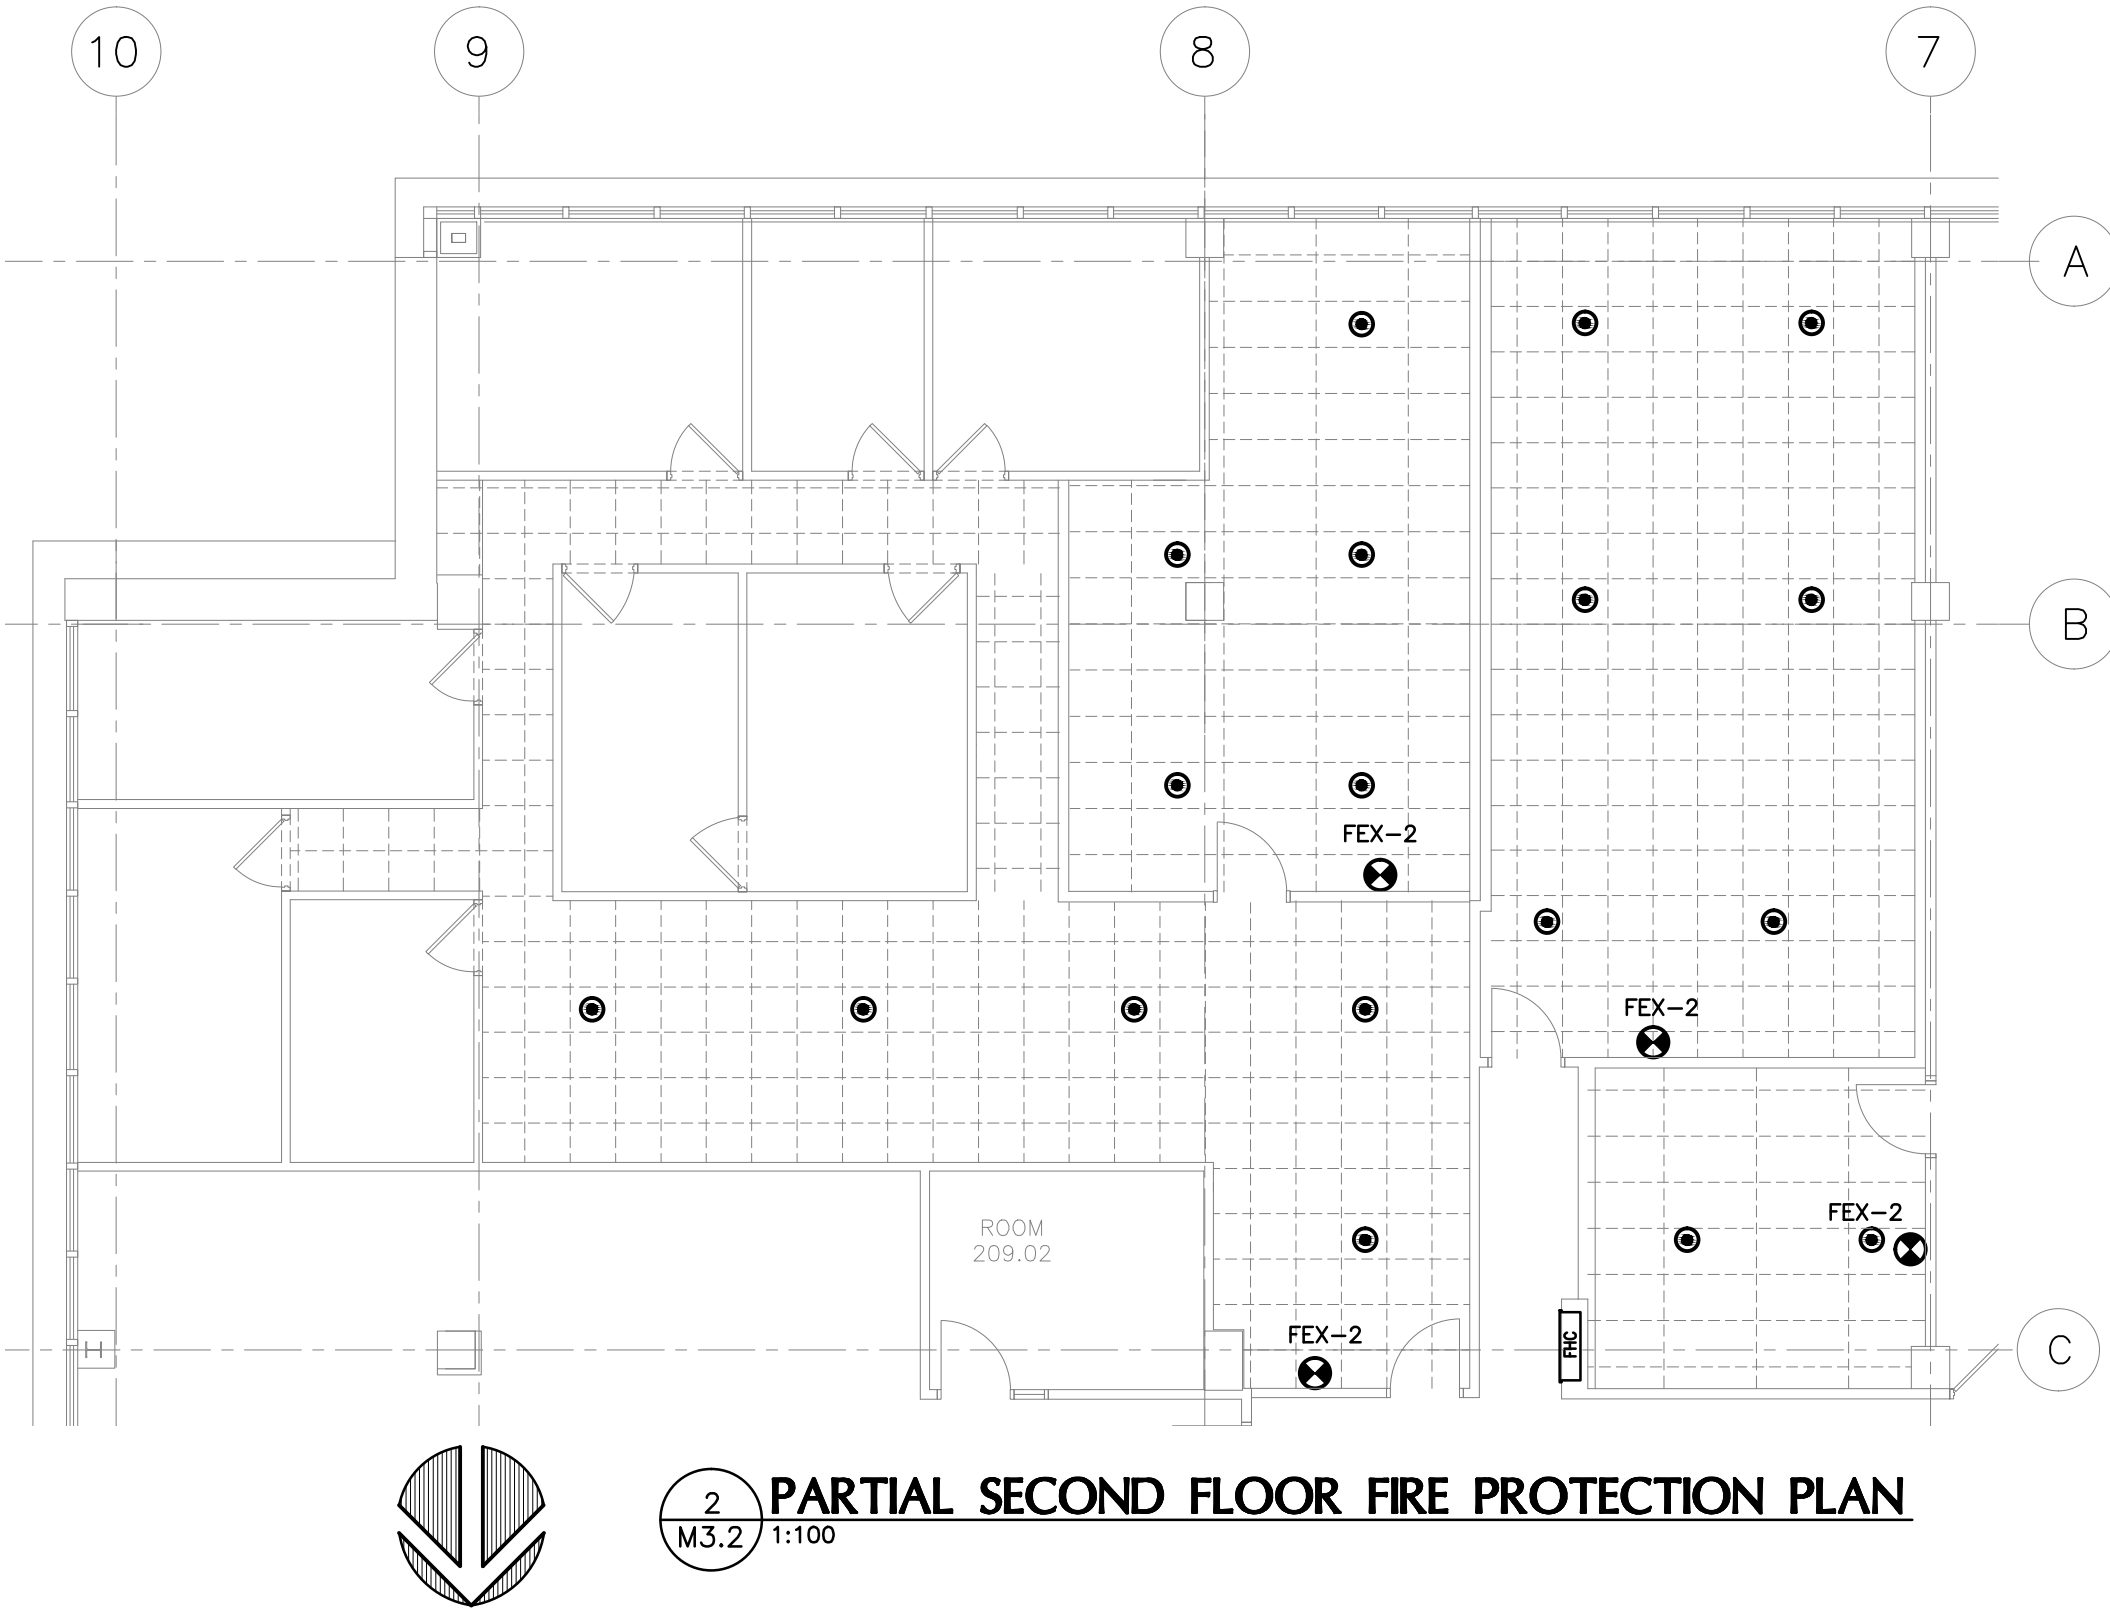

2 PARTIAL SECOND FLOOR FIRE PROTECTION PLAN
M3.2 1:100

FIRE PROTECTION NOTES:

1. PROVIDE NEW 10 LB ABC FIRE EXTINGUISHER WITH WALL BRACKET WHERE INDICATED. RELOCATE EXISTING FIRE EXTINGUISHER & CABINET.
2. ADJUST SPRINKLER LINE ROUTING ON SITE TO SUIT STRUCTURE, DUCTWORK, PIPING, LIGHTING, AND WORK OF OTHER TRADES.
3. PROVIDE NEW PENDANT SPRINKLER HEADS IN AREAS WITH CEILINGS. ADJUST SPRINKLER HEAD LOCATIONS WHERE REQUIRED AND PROVIDE ADDITIONAL HEADS WHERE REQUIRED TO PROVIDE COVERAGE IN ACCORDANCE WITH NFPA.

revisions	description	date
1	TENDER SET	13/07/05

Client
**R.050172.002
FOR
PWGSC**

project title
OFFICE RENOVATIONS
REGINA, SASKATCHEWAN

approved by
designed by
J.L.
drawn by
BG
PWGSC Project Manager
SK
PWGSC, Architectural and Engineering Resources Manager
KD
Client
KL

drawing title
**PARTIAL SECOND FLOOR
FIRE PROTECTION PLAN**

project no. R.050172.002	sheet M3.2	revision no.
------------------------------------	----------------------	--------------

