



lectec engineering
Electrical engineering Consultants
St Francis Street Phone (902) 250-725
Lower Sackville, NS Fax (902) 250-0729
B4C 1J5 W . w . e . e . b . c . i . c . o . m


| revisions | project | date |
|-----------|-----------------------|-----------|
| 1 | ISSUED FOR ADDENDUM | 18 SEP 13 |
| 0 | ISSUED FOR TENDER | 19 AUG 13 |
| B | ISSUED FOR 99% REVIEW | 16 JUL 13 |
| A | ISSUED FOR 60% REVIEW | 28 JUN 13 |

Project CANADA REVENUE AGENCY
SPACE OPTIMIZATION PROJECT
CASH COUNTER RENOVATIONS
RALSTON BLDG – 1557 HOLLS STREET
HAUFAX – NS


LEVEL 300
POWER & COMM.
DEMOLITION PLAN

| | |
|--|------------|
| designed DC | conçu |
| date JUNE 2013 | |
| drawn RBJ | dessiné |
| date JUNE 2013 | |
| approved | approuvé |
| date | |
| Tender ALLAN MCNEILL | Submission |
| PMWSC Project Manager Administrateur de projet TPSCC | |
| project number no. du projet | |
| R.053258.004 | |

drawing no. E3
no. du dessin



SCALE : 1:100
0m 1m 2m 3m 4m 5m 6m 7m 8m 9m 10m

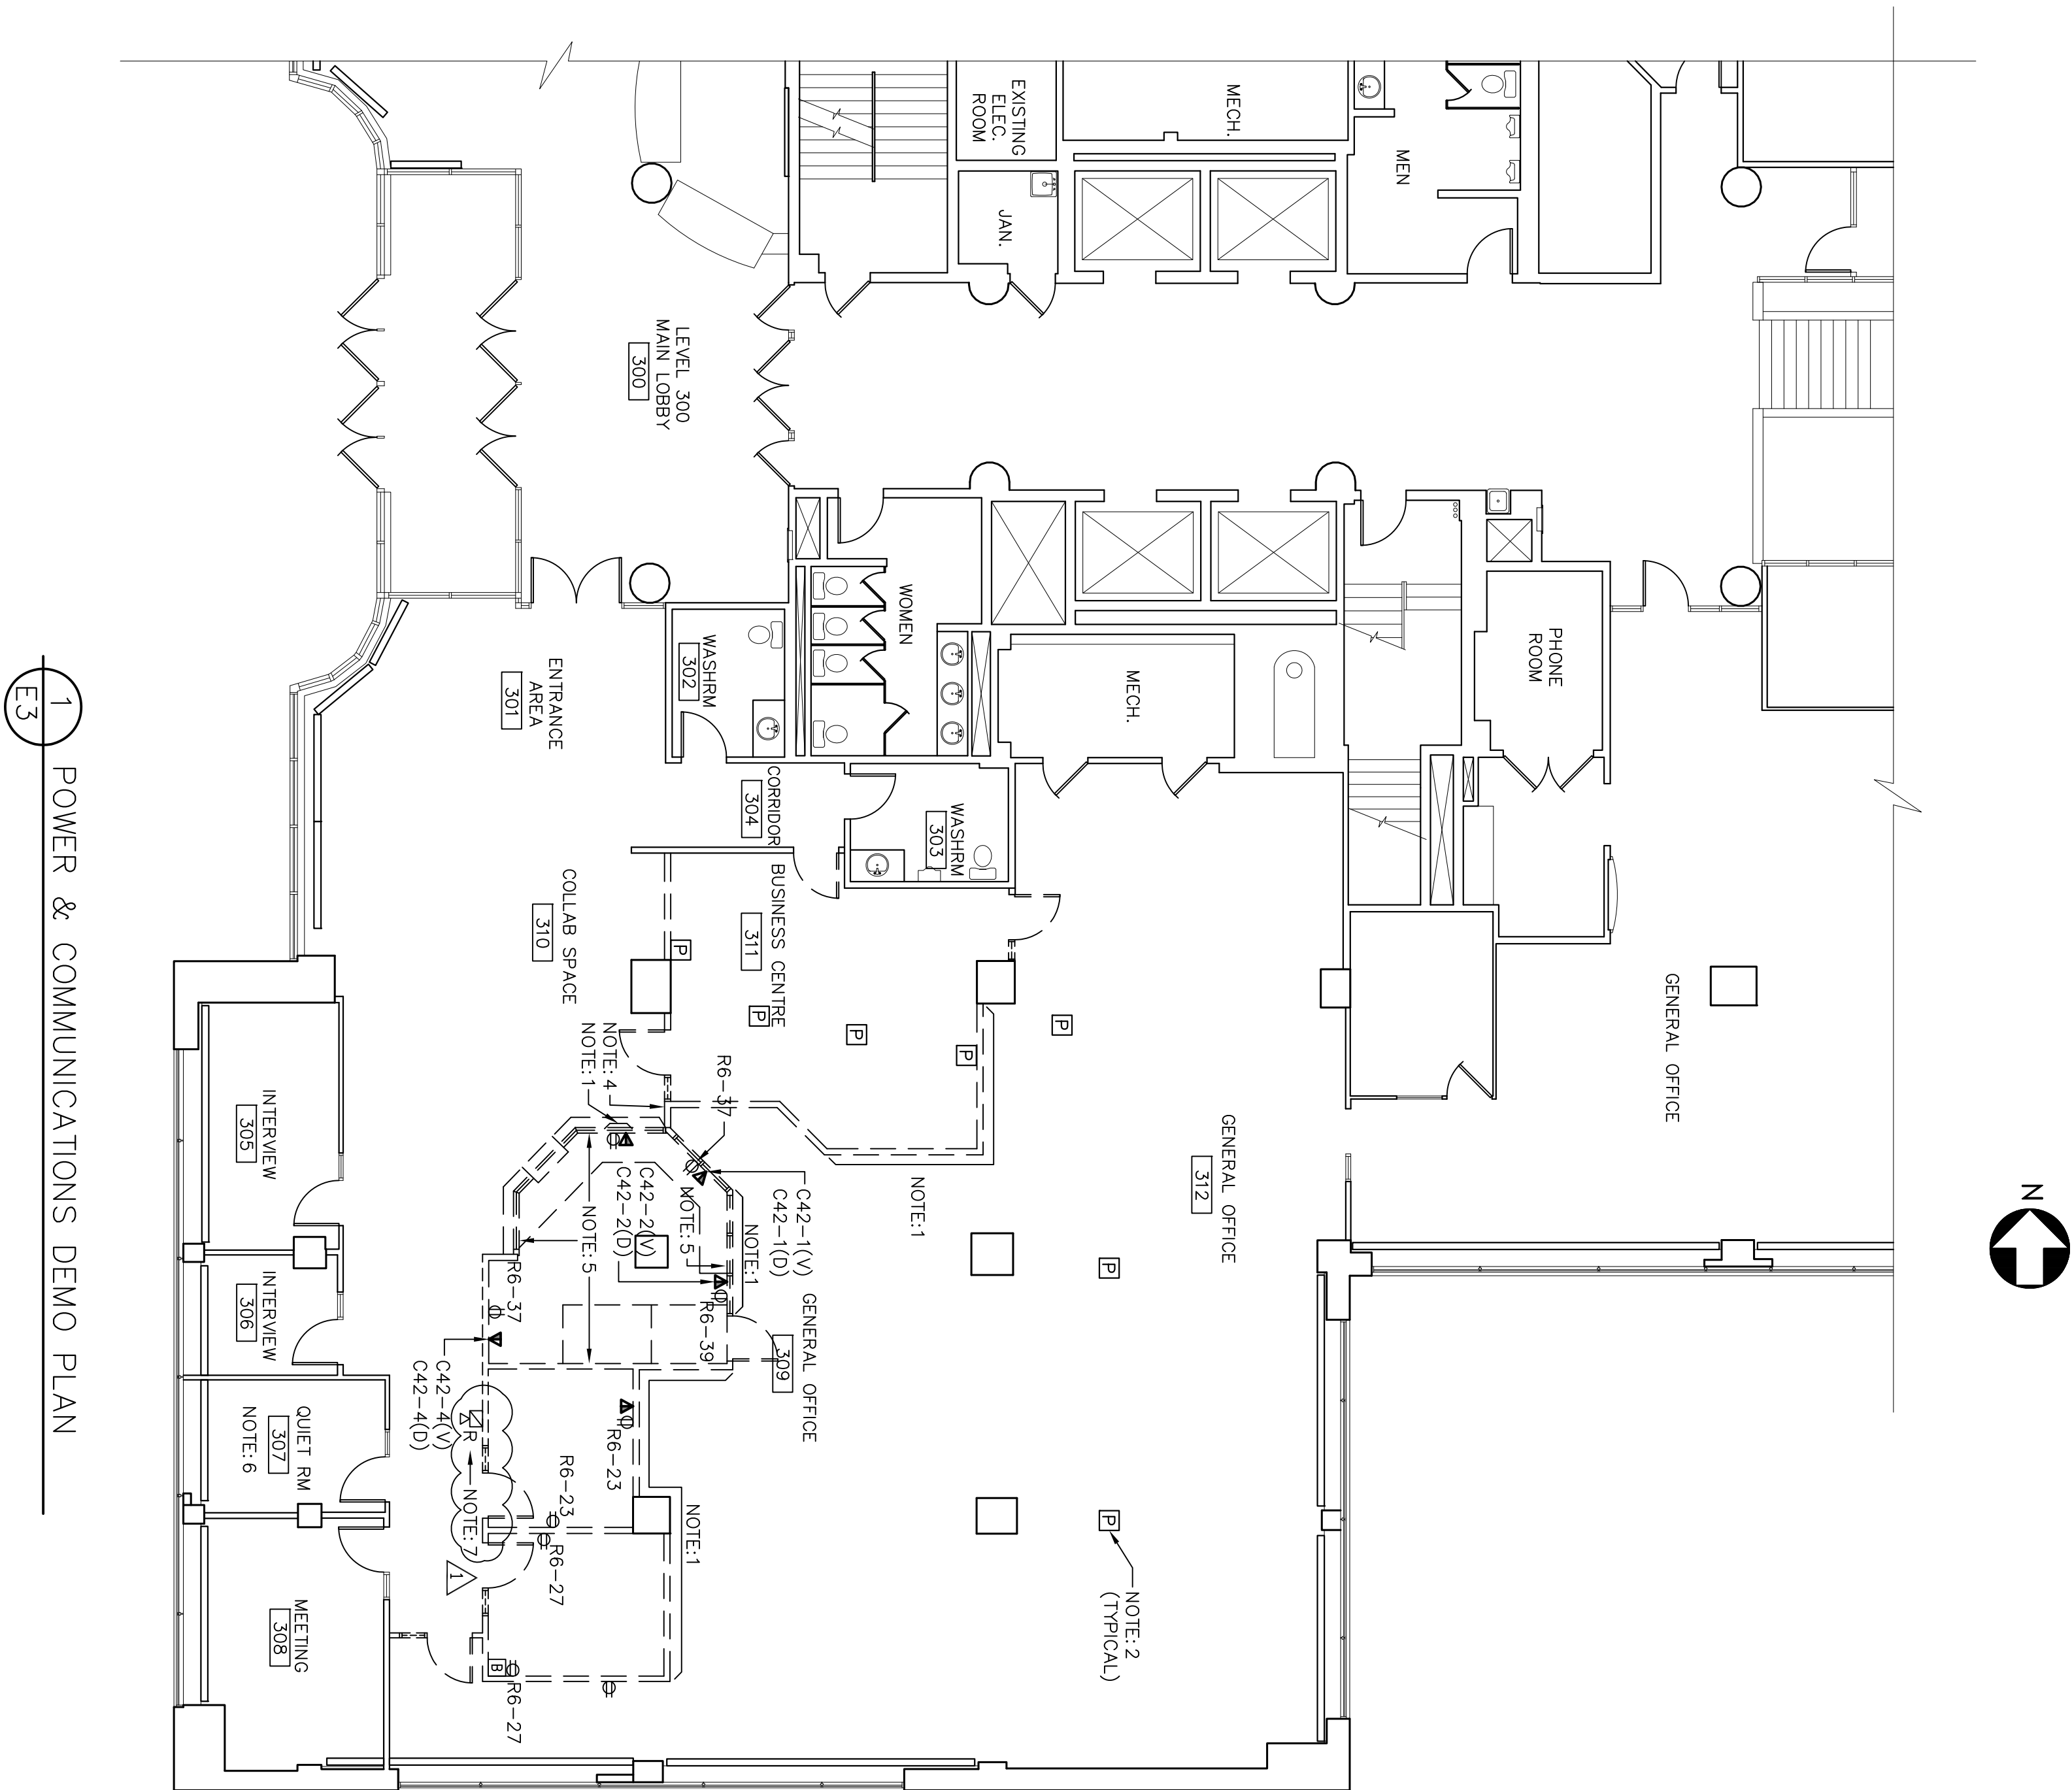

1 POWER & COMMUNICATIONS DEMO PLAN
E3

- LEGEND**
- BLANK COVER FOR OUTLET BOX
 - ⊞ INDICATES EXISTING TO REMAIN
 - ⌀ 15A, 120V DUPLEX RECEPTACLE
 - ▼ VOICE/DATA OUTLET
 - ⊞ PACK POLE FOR POWER AND COMMUNICATION WIRING TO THE OFFICE FURNITURE.
 - ⊞ FIRE ALARM COMBINATION HORN/STROBE
 - ⊞ PANIC ALARM PUSH BUTTON

- NOTES:**
- OUTLET IDENTIFICATION BLOCKED FROM VIEW. REMOVE ALL ELECTRICAL OUTLETS.
 - ALL EXISTING PACK POLES AND ASSOCIATED POWER WIRING FROM THE ABOVE CEILING JUNCTION BOX SHALL BE REMOVED. REMOVAL OF COMMUNICATION CABLES IS NOT INCLUDED IN THIS CONTRACT.
 - ALL ELECTRICAL DEVICES SHOWN (EXCEPT FIRE ALARM) SHALL BE REMOVED AND ASSOCIATED WIRING/CABLE/CONDUITS SHALL BE REMOVED BACK TO THE SOURCE. REMOVAL OF ALL COMMUNICATION DEVICES AND ASSOCIATED CABLES IS NOT INCLUDED IN THIS CONTRACT.
 - REMOVE THE RELATED ELECTRICAL CABLE/WIRE/CONDUIT FOR THE CARD SWIPE/READER FOR THE DOOR ENTRY TO THE BUSINESS CENTER AND THE OPERATIONAL ZONE.
 - ALL ELECTRICAL CABLE, CONDUIT, WIRES AND ASSOCIATED WIRING DEVICES AND EQUIPMENT UNDER THE RAISED FLOOR SHALL BE REMOVED BACK TO THE SOURCE.
 - REMOVE PANIC ALARM PUSH BUTTON FROM ROOM 307. THIS ALARM SHALL BE REMOVED TO ROOM 308.
 - REMOVE EXISTING FIRE ALARM HORN/STROBE TO ENTRANCE AREA 301. SEE DRAWING E4.