


DIALOG™

stamp

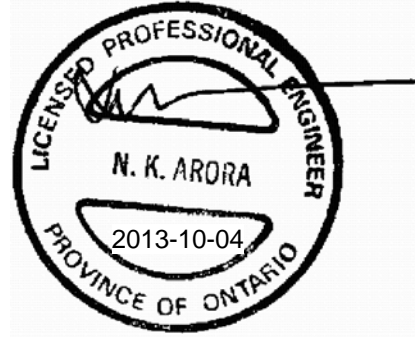

GENERAL NOTES:

1. UNLESS DENOTES OTHERWISE, OCCUPANCY SENSORS SHALL BE 347V LINE VOLTAGE, (CEILING TYPE - 360 DEGREE, 2000 SQFT RANGE, WALL TYPE - 300 SQFT), PASSIVE INFRARED/ULTRASONIC, PROGRAMMED FOR 30 MINUTE TIMEOUT.
2. ALL EMERGENCY BATTERY PACKS TO BE 144W, 120/347VAC, 12V C/W TWO 4W LED HEADS, WHITE FINISH.
3. ALL REMOTE EMERGENCY LIGHTING HEADS TO BE SURFACE DECORATIVE LUMINARIES 12V, 4W LED, WHITE FINISH.
4. ALL EXIT SIGNS TO BE INTERNATIONAL GREEN PICTOGRAM ALUMINUM SLIM EDGE-LIT SIGN 120/347VAC, 12V C/W LONG-LIFE WHITE LED LIGHT SOURCE.

