

KEYNOTES	
NUMBER	DESCRIPTION
A10	EXISTING RADIO ANTENNA, CONDUIT & WIRING TO BE REMOVED, TEMPORARILY RELOCATED TO REMAIN OPERATIONAL DURING REMEDIATION WORK & REINSTALLED TO ORIGINAL LOCATION AFTER REMEDIAL WORK IS COMPLETED. REMOVAL, RELOCATION & REINSTALLATION OF ANTENNA (S) MUST BE DONE BY A DEPARTMENTAL REPRESENTATIVE APPROVED CONTRACTOR
A318	EXISTING ROOF MEMBRANE TO REMAIN, PROTECT MEMBRANE DURING REMEDIATION WORK MAKE GOOD ANY DAMAGE TO ORIGINAL CONDITION
A612	REMOVE & DISPOSE OF OFF-SITE EXISTING METAL FLASHING
A619	REMOVE & DISPOSE OF OFF-SITE EXISTING METAL ROOF PANELS & BUILDING PAPER.
A708	NEW EXTERIOR ROOF STEEL CLADDING, PROFILE: TRADITION 100-4 (BY VICWEST), 24GA, PREMIUM COLOR: WEATHERED ZINC CM12-2006, 12000 SERIES PVDF (BY CASCADIA METALS)
A731	ALL EXPOSED GLULAM BEAMS TO BE WRAPPED WITH 0.6mm, PREMIUM COLOR: WEATHERED ZINC CM12-2006, 12000 SERIES PVDF (BY CASCADIA METALS)
A737	NEW CAP FLASHING 0.6mm, PREMIUM COLOR: WEATHERED ZINC CM12-2006, 12000 SERIES PVDF (BY CASCADIA METALS)

4		
3		
2		
1	ISSUED FOR TENDER	13-09-11
0	ISSUED FOR FINAL CLIENT REVIEW	13-03-28
Revision / Revision	Description / Description	Date / Date

Client / client
**CANADA BORDER SERVICES
AGENCY**
800 Burrard Street
Vancouver B.C. V6Z 2V8

Project title / Titre du projet
10290 - HWY 22A- SALMO, B.C.
**Waneta Port of Entry - Building Envelope
Remediation PWGSC - PROJECT NO.
R.066395.003**

Consultant Approval Box Only

Designed by / Concept par
SB

Drawn by / Dessiné par
BCAI

PWGSC, Project Manager / Administrateur de Projets TPSGC
JULIAN HO


PWGSC, Regional Manager, Architectural & Engineering Services /
Gestionnaire régionale, Services d'architecture et de génie,TPSGC

Drawing title / Titre du dessin
ROOF PLAN


Project no. / no. du Projet	Sheet / Feuille	Revision no. / La Revision
R.066395.003	A302	



COLOUR LEGEND
EXISTING TO REMAIN
DEMOLITION SCOPE OF WORK

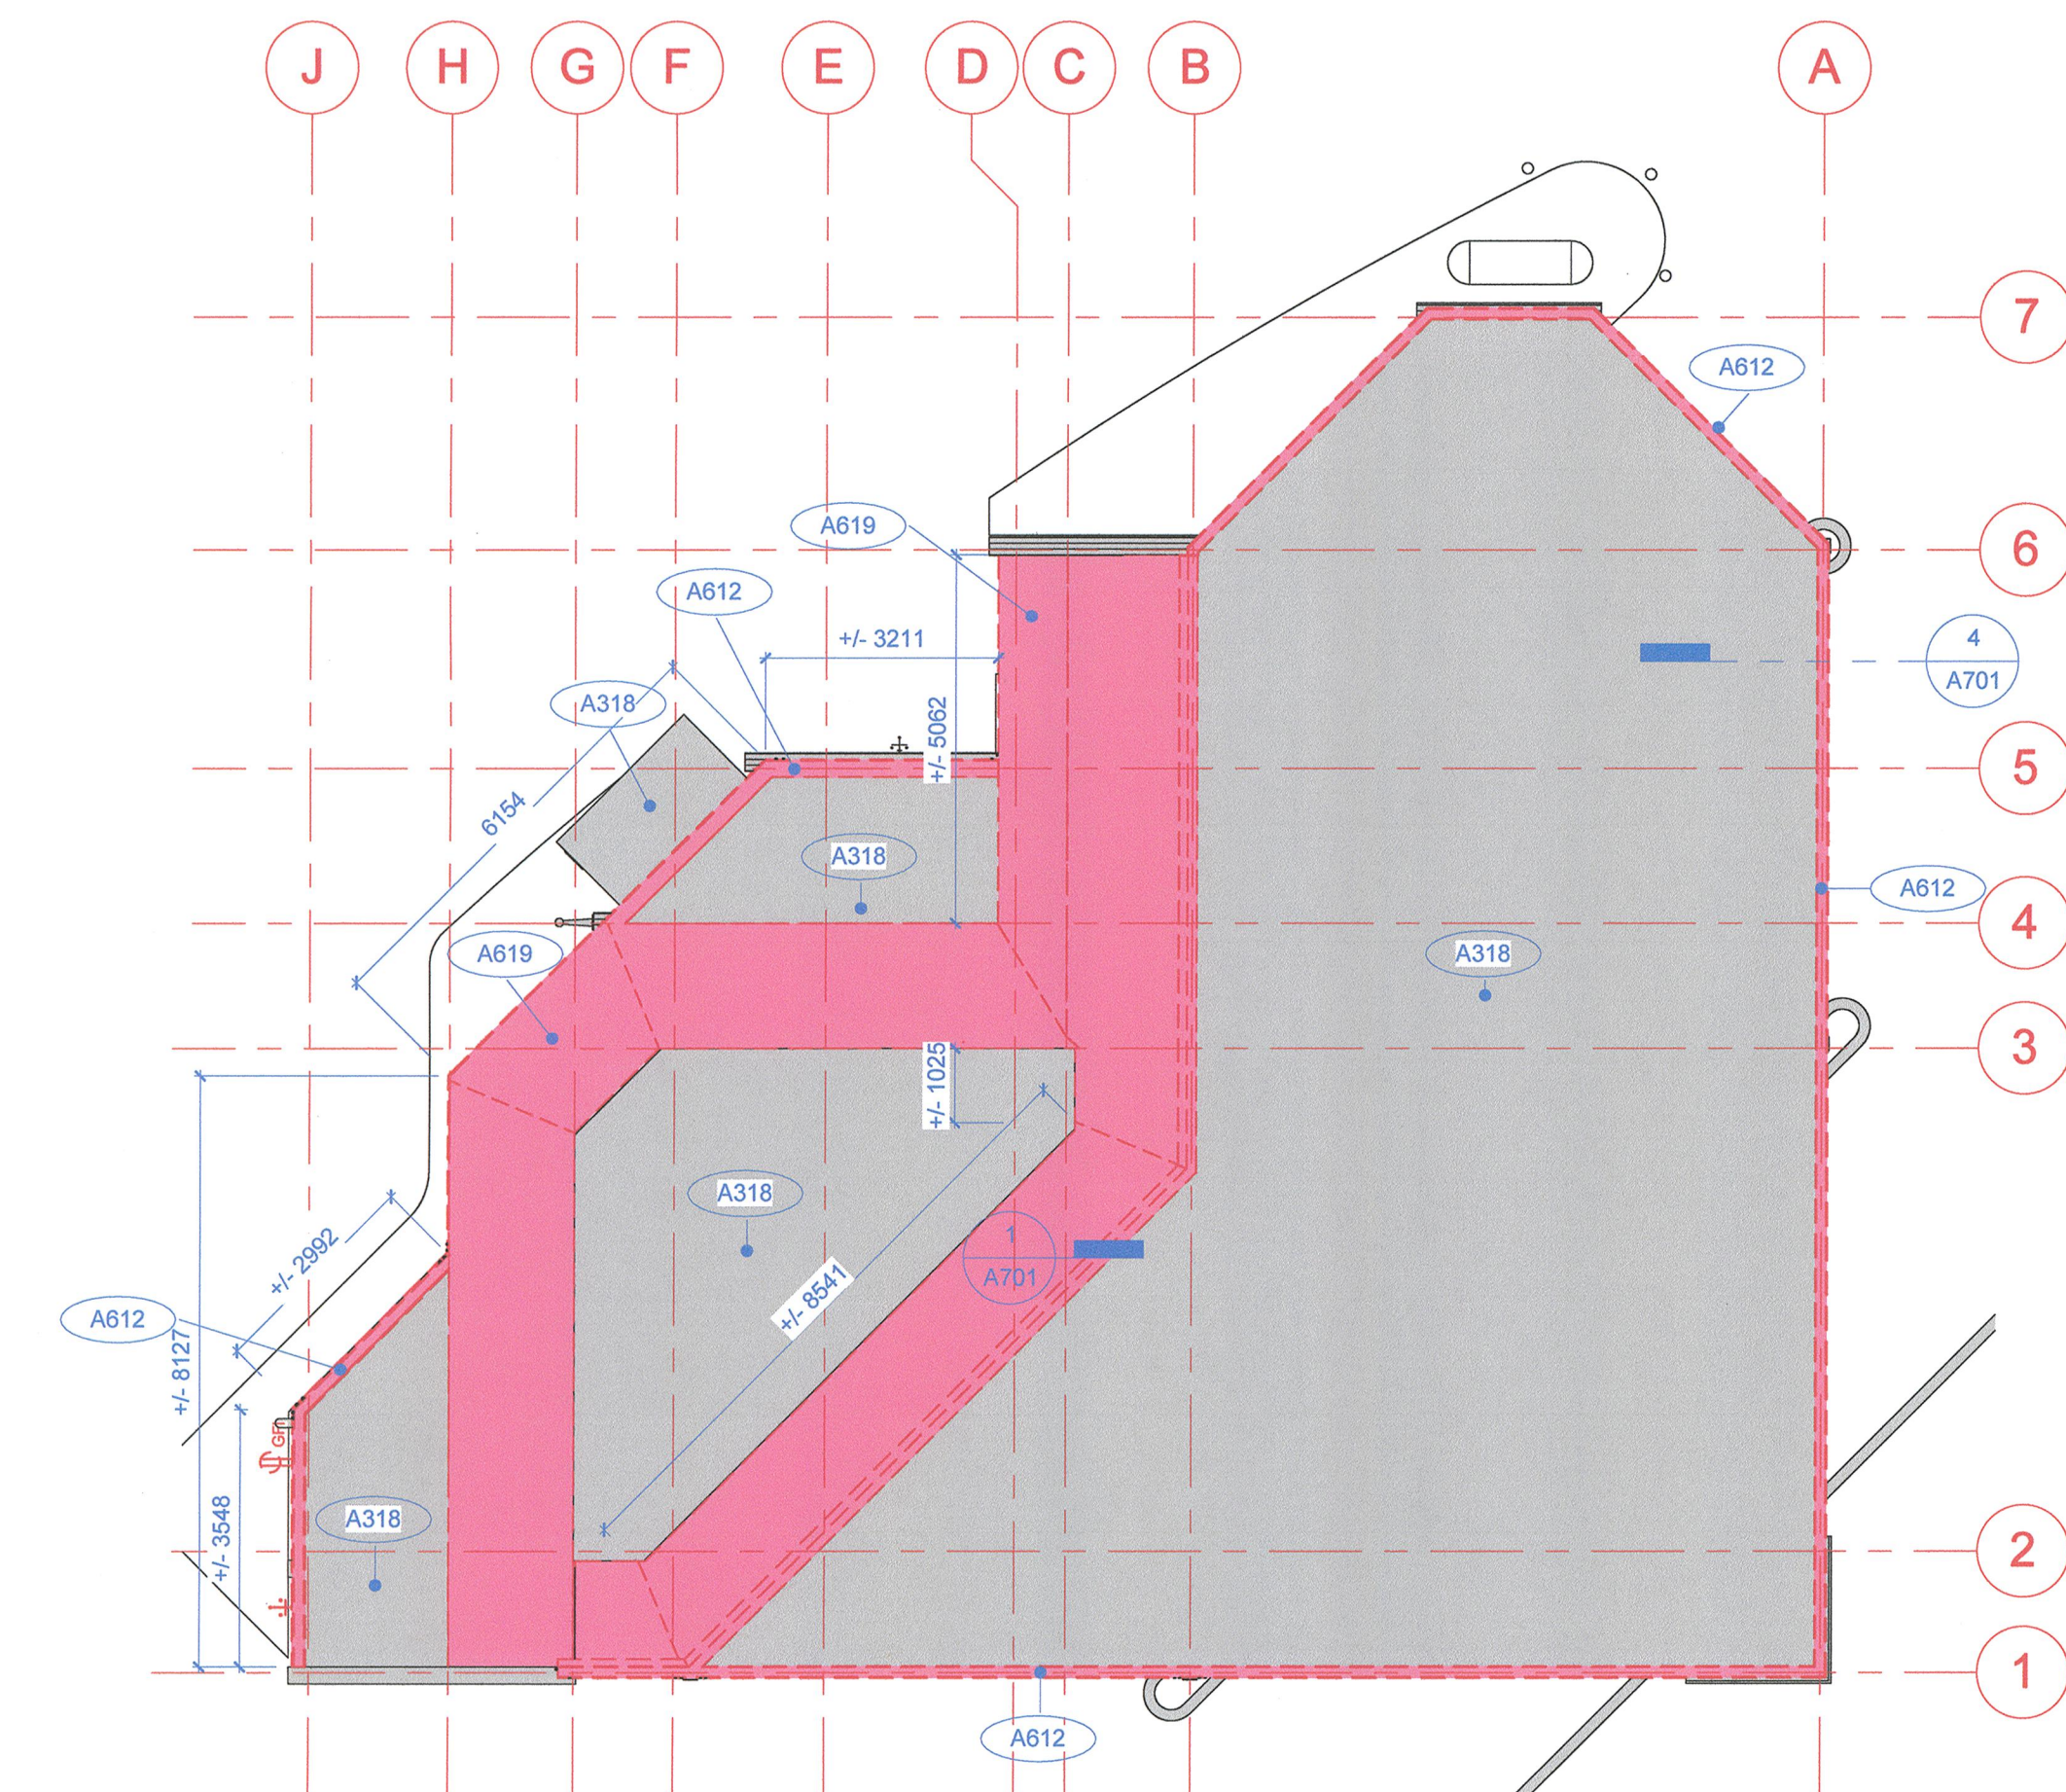

ROOF DEMOLITION PLAN
1 : 100

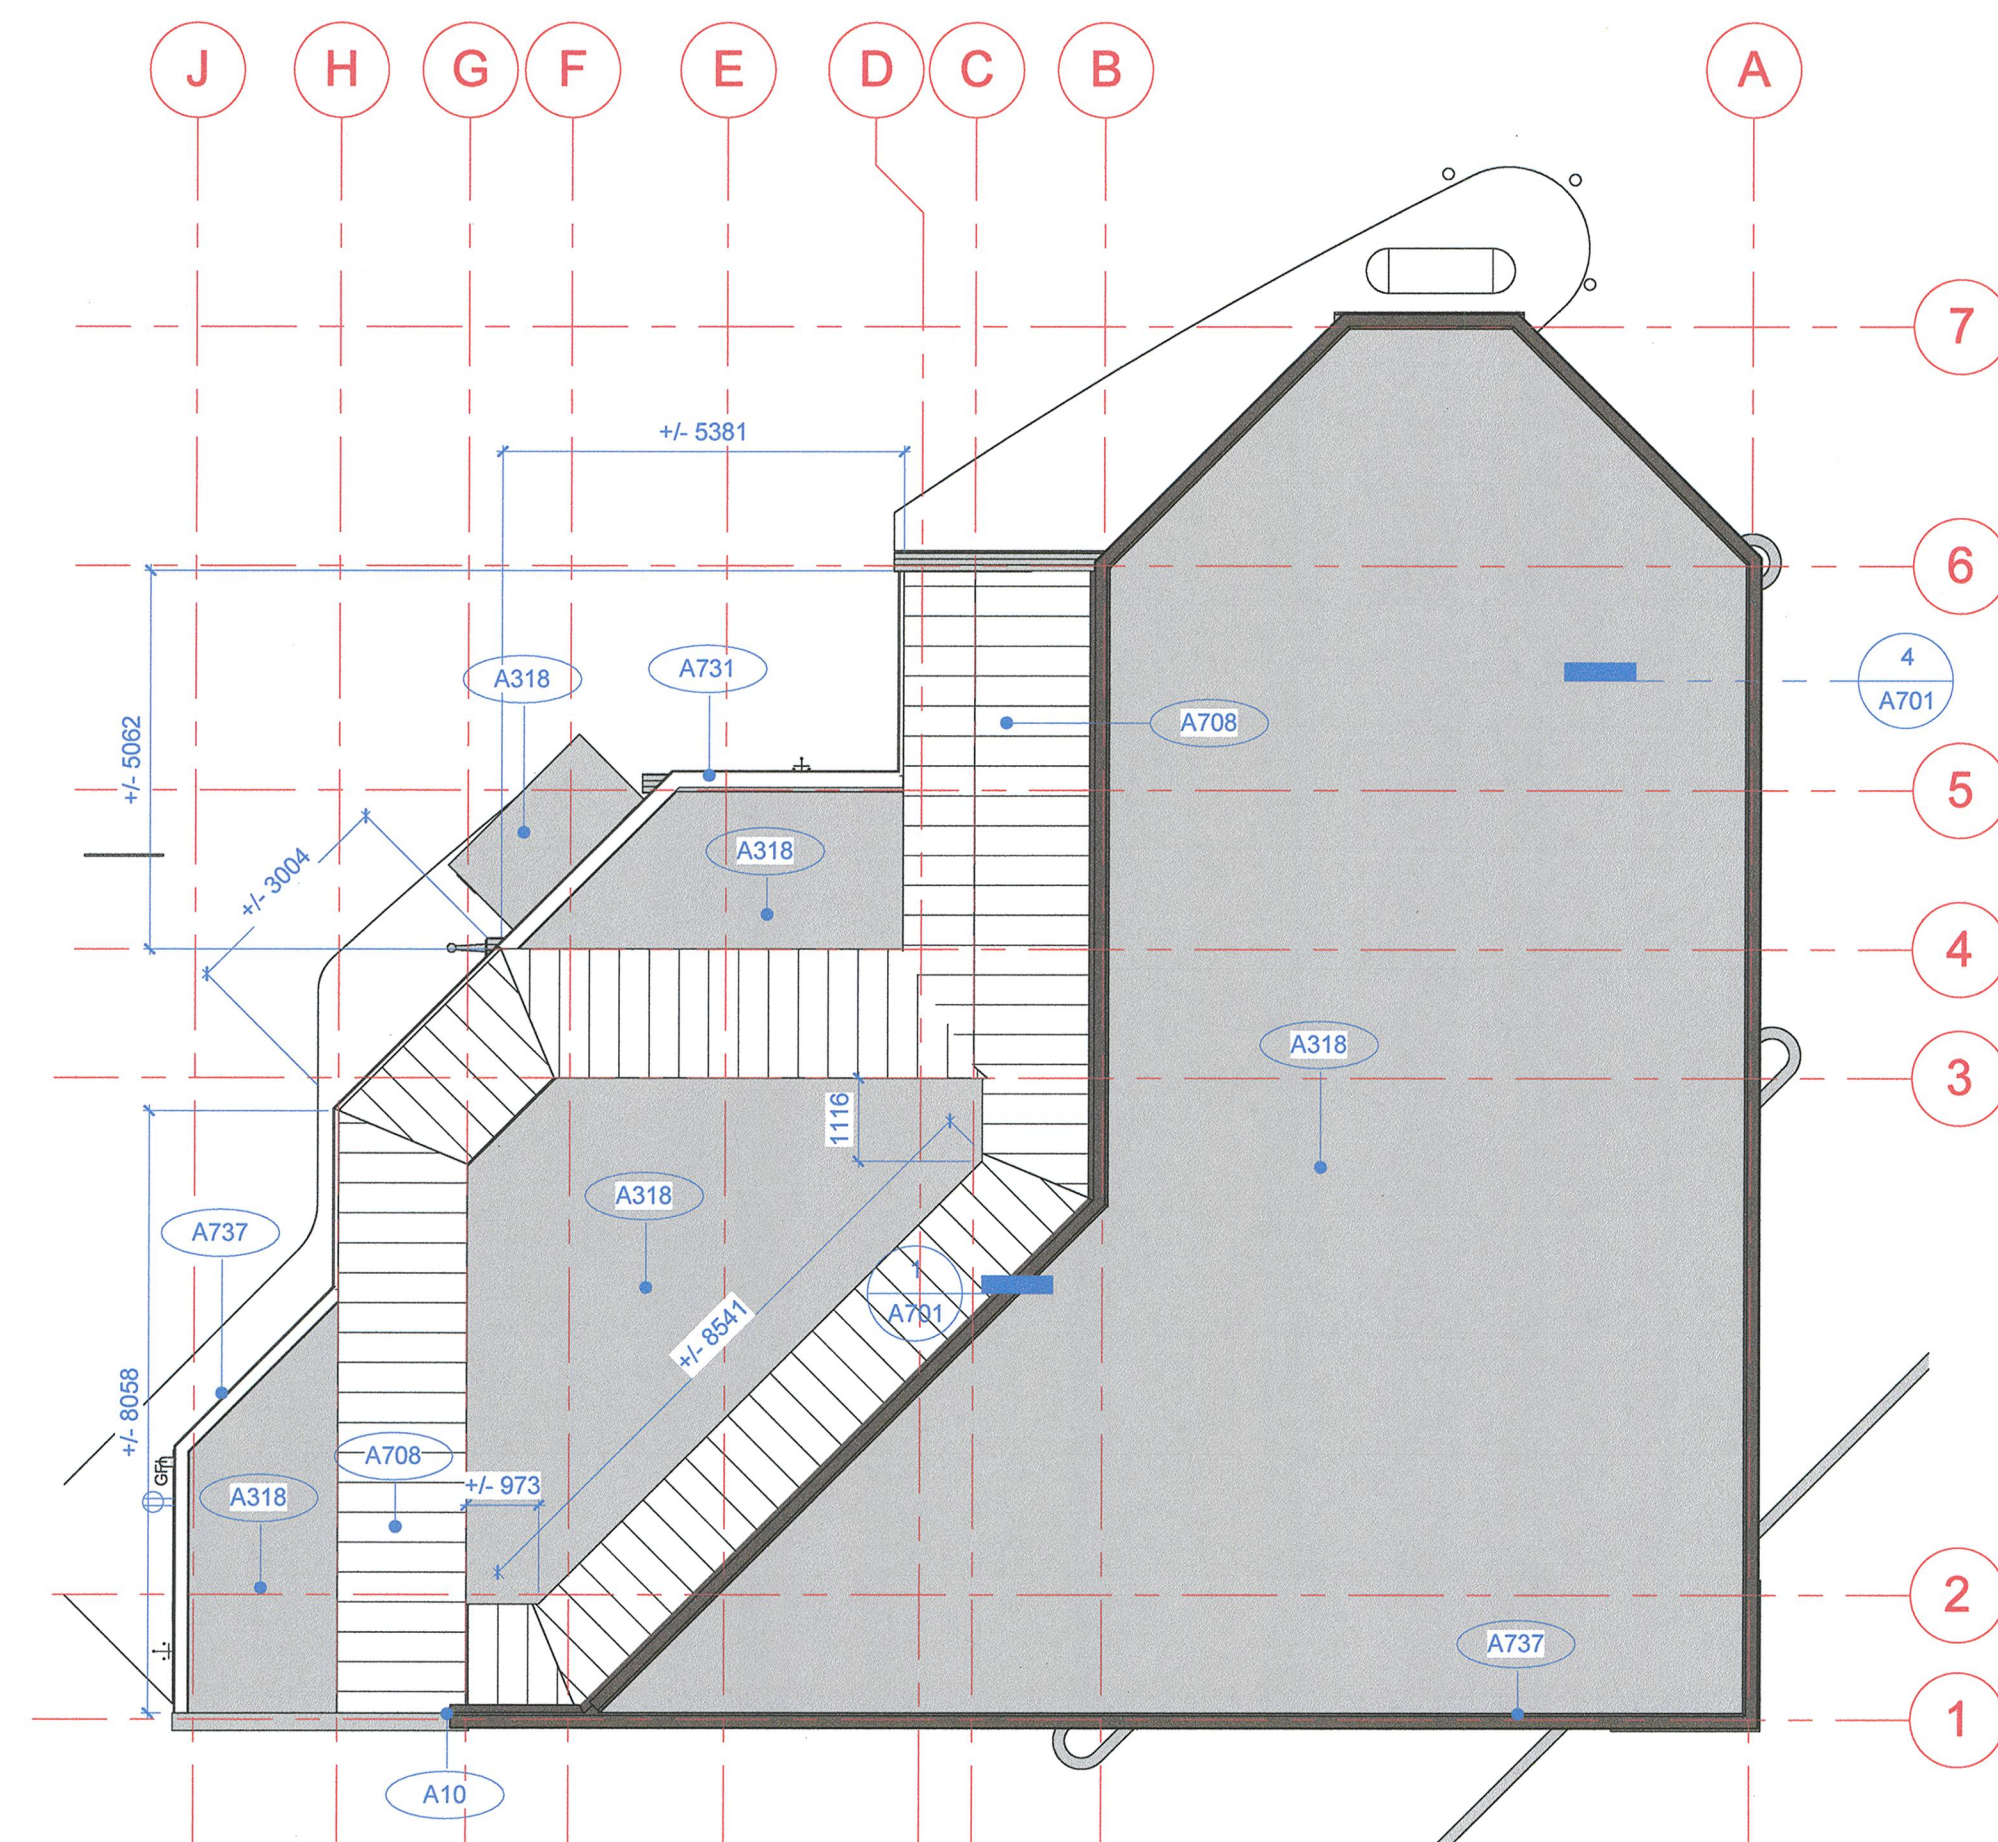

ROOF PLAN - NEW
1 : 100