




stamp

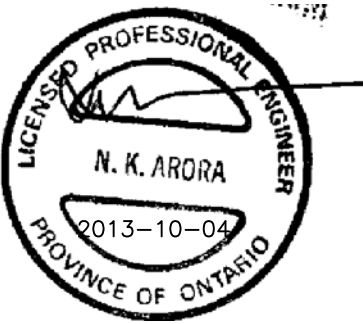

01	ISSUED FOR BID	2013/10/04
revision	description	date

Do not scale drawings
Verify all dimensions and conditions on site and
Immediately notify the Departmental Representative of all
discrepancies

A	detail no. no. du détail
B	drawing no. - where detail required dessin no. - où détail exigé
C	drawing no. - where detailed dessin no. - où détaillé

project title
titre du projet
GRAND VALLEY INSTITUTION FOR WOMEN
1575 HOMER WATSON BLVD.
KITCHENER, ONTARIO, N2P 2C5
PRINCIPAL ENTRANCE BUILDING

drawing title
titre du dessin
DEMOLITION AND TEMPORARY
SITE PLANS

drawn by
dessiné par OS

designed by
conçue par OS

approved by
approuvé par NA

bid
offre RP project manager
administrateur de projets

project date
date du projet 2012-11-06

project no.
no. du projet DIALOG NO. 09487T.02
R.047995.001


drawing no.
dessiné no. E1.01

GENERAL NOTES


1. ALL WORK SHOWN TO BE PERFORMED IN PHASES. FOR CONSTRUCTION PHASES REFER TO DRAWING A1.01 - PHASING PLANS.
2. TRENCH ROUTING SHOWN IS DIAGRAMMATIC ONLY. CONTRACTOR TO COORDINATE ON SITE WITH ALL TRADES TO AVOID INTERFERENCE WITH EXISTING SERVICES. WHEN CROSSING EXISTING SERVICE, NEW DUCTBANK OR CONDUIT TO GO BELOW EXISTING SERVICES WITH MINIMUM 300mm CLEARANCE.
3. CONDUIT ROUTING SHOWN IS DIAGRAMMATIC ONLY. CONTRACTOR TO COORDINATE ON SITE WITH ALL TRADES TO ALL NEW CONDUITS IN EXISTING COMPLEX BUILDING TO BE RUN ABOVE CEILING AND CONCEALED.
4. REMOVE TWO ROOF MOUNTED CCTV CAMERAS, INTERCOM STATION, ELECTRIC STRIKE AND FDS SYSTEM SHOWN ON TEMPORARY PLAN AFTER THESE SYSTEMS ARE INSTALLED AND OPERATIONAL AT THE PERMANENT PERIMETER FENCE.
5. WHEN PERMANENT FENCE FDS SYSTEM IS OPERATIONAL, RELOCATE TWO PIDS PA SPEAKERS FROM TEMPORARY HOARDING FENCE AND ROTATE POLE MOUNTED CCTV CAMERA AS SHOWN ON NEW ELECTRICAL SITE PLAN .

KEYNOTES

1. REMOVE EXISTING 347V U/G WIRING AND CONDUIT FOR LIGHTING POLES SHOWN TO BE REMOVED.
2. RELOCATE EXISTING POLE MOUNTED LIGHTING FIXTURE INCLUDING LIGHT STANDARD AS INDICATED ON NEW LIGHTING SITE PLAN.
3. RE-ROUTE EXISTING U/G CONDUITS C/W 347V LIGHTING CIRCUITS TO FEED RELOCATED LIGHTING POLES. EXTEND EXISTING WIRING AND CONDUITS AS REQUIRED TO ENSURE PROPER OPERATION.
4. REMOVE EXISTING FENCE DETECTION SYSTEM CABLES AND MODULES AND RE-USE FOR TEMPORARY HOARDING FENCE.
5. RELOCATE EXISTING INTERCOM STATION AND ELECTRIC STRIKE TO TEMPORARY HOARDING GATE AND RE-ROUTE AND EXTEND EXISTING POWER AND COMMUNICATION UNDERGROUND LINES TO NEW INTERCOM LOCATION.
6. RELOCATE EXISTING POLE MOUNTED CCTV CAMERA TO THE ROOF AS SHOWN ON TEMPORARY SITE PLAN AND RE-CONNECT TO EXISTING CCTV SYSTEM. PROVIDE 120V POWER CIRCUIT FROM THE NEAREST AVAILABLE POWER PANEL AS REQUIRED. CAMERA TO BE MOUNTED ONTO A SWING BACK PARAPET MOUNT ALTRON SB1-2000PMC/DNC.
7. REMOVE VIDEO SIGNAL UNDERGROUND CABLES FOR REDUNDANT CCTV POLE.
8. REMOVE POLE MOUNTED CCTV CAMERA INCLUDING POLE. ENSURE CONTINUITY OF EXISTING CCTV FIBRE OPTIC AND POWER LOOPS IS MAINTAINED. PROVIDE ALL ADDITIONAL WORK AS NECESSARY.
9. REMOVE REDUNDANT PORTION OF UNDERGROUND POWER FEED TO INTENSIVE INTERVENTION UNIT AFTER THE BREAKER IS CONNECTED TO THE NEW FEED.
10. RELOCATE EXISTING PIDS PA SPEAKERS AS SHOWN ON TEMPORARY SITE PLAN AND RECONNECT TO EXISTING SYSTEM.
11. REMOVE REDUNDANT ELECTRICAL BOXES UNDER THE TREES. REMOVE UNDERGROUND WIRING BACK TO SOURCE.
12. PROVIDE NEW CCTV CAMERA MOUNTED ON NEW POST. CAMERA POST IS BY GENERAL CONTRACTOR. COORDINATE WITH TRADES ON SITE.
13. PROVIDE (2) 53mm PVC CONDUITS FOR CCTV CAMERA. ONE CONDUIT C/W 120V, 15A CIRCUIT. PROVIDE DUPLEX RECEPTACLE AT CCTV POLE. SECOND C/W FIBRE OPTIC CABLE SEE DRAWING E4.02. PROVIDE BEND DIAMETER AS PER MANUFACTURER'S RECOMMENDATION.

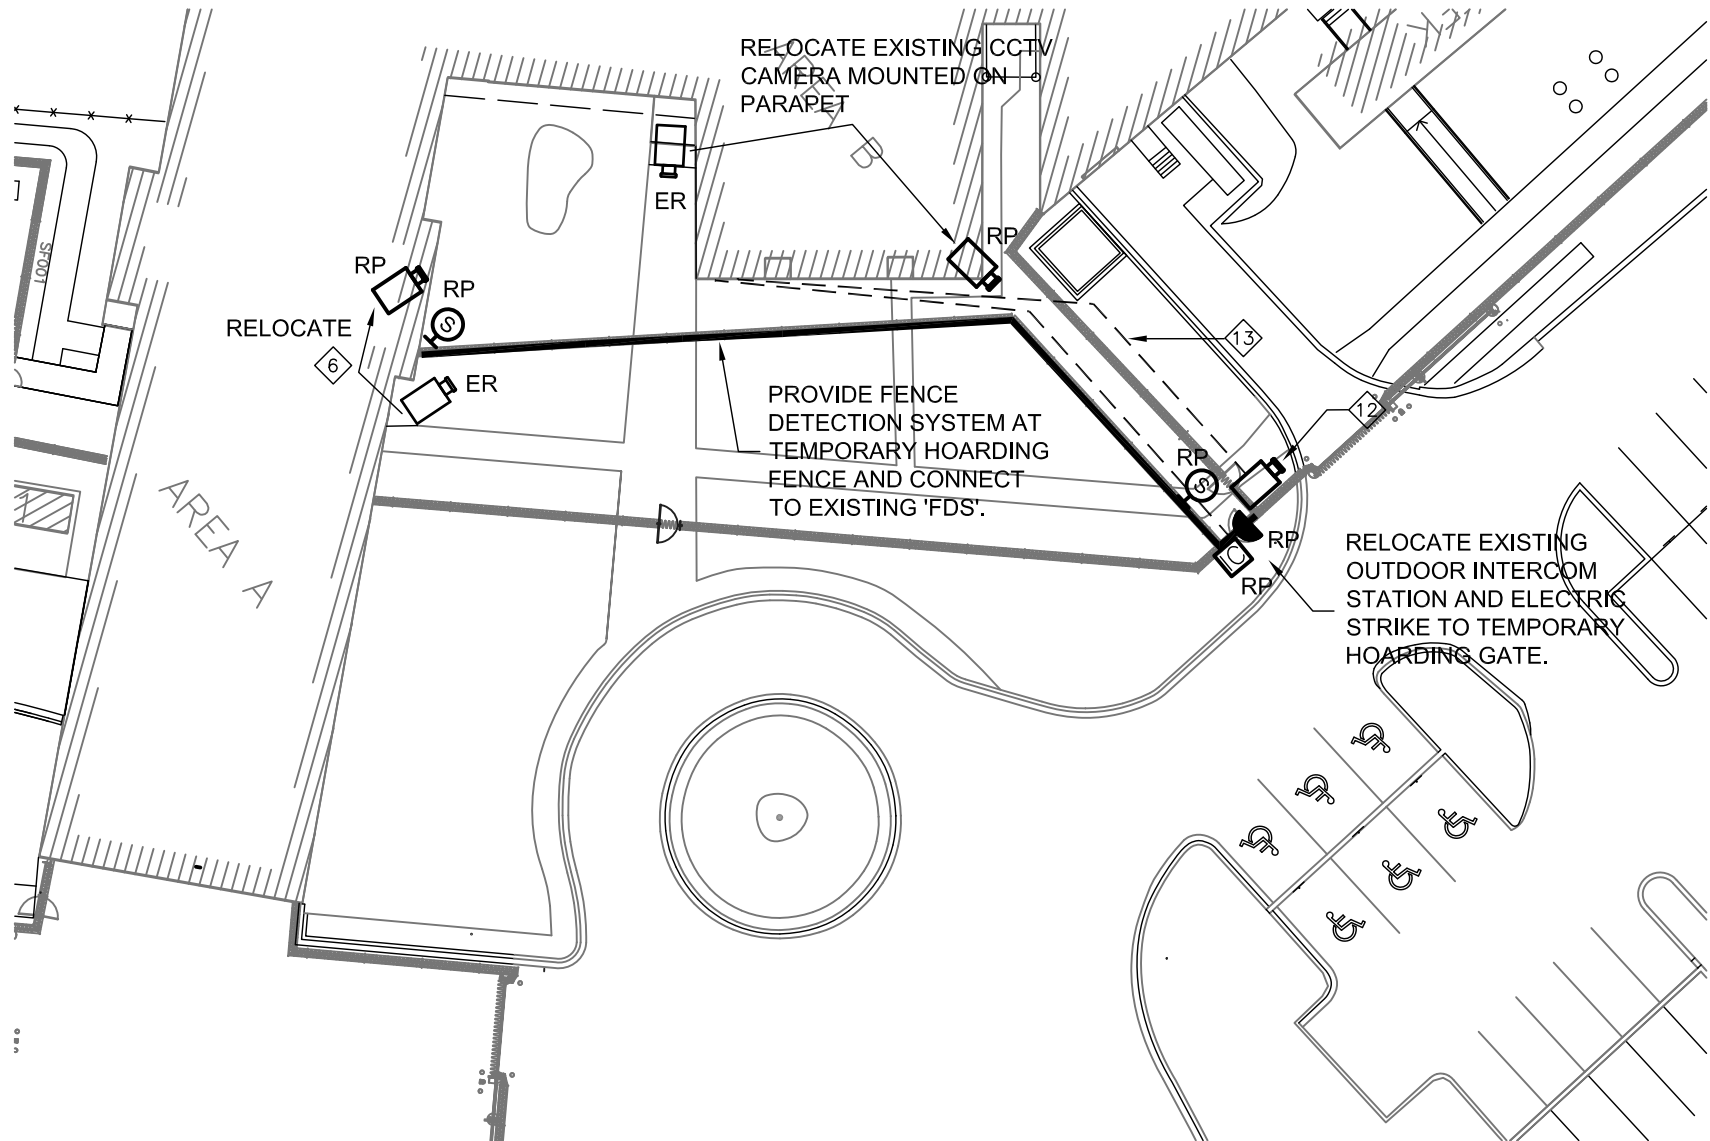

1
E1.01
TEMPORARY SITE PLAN
1:400

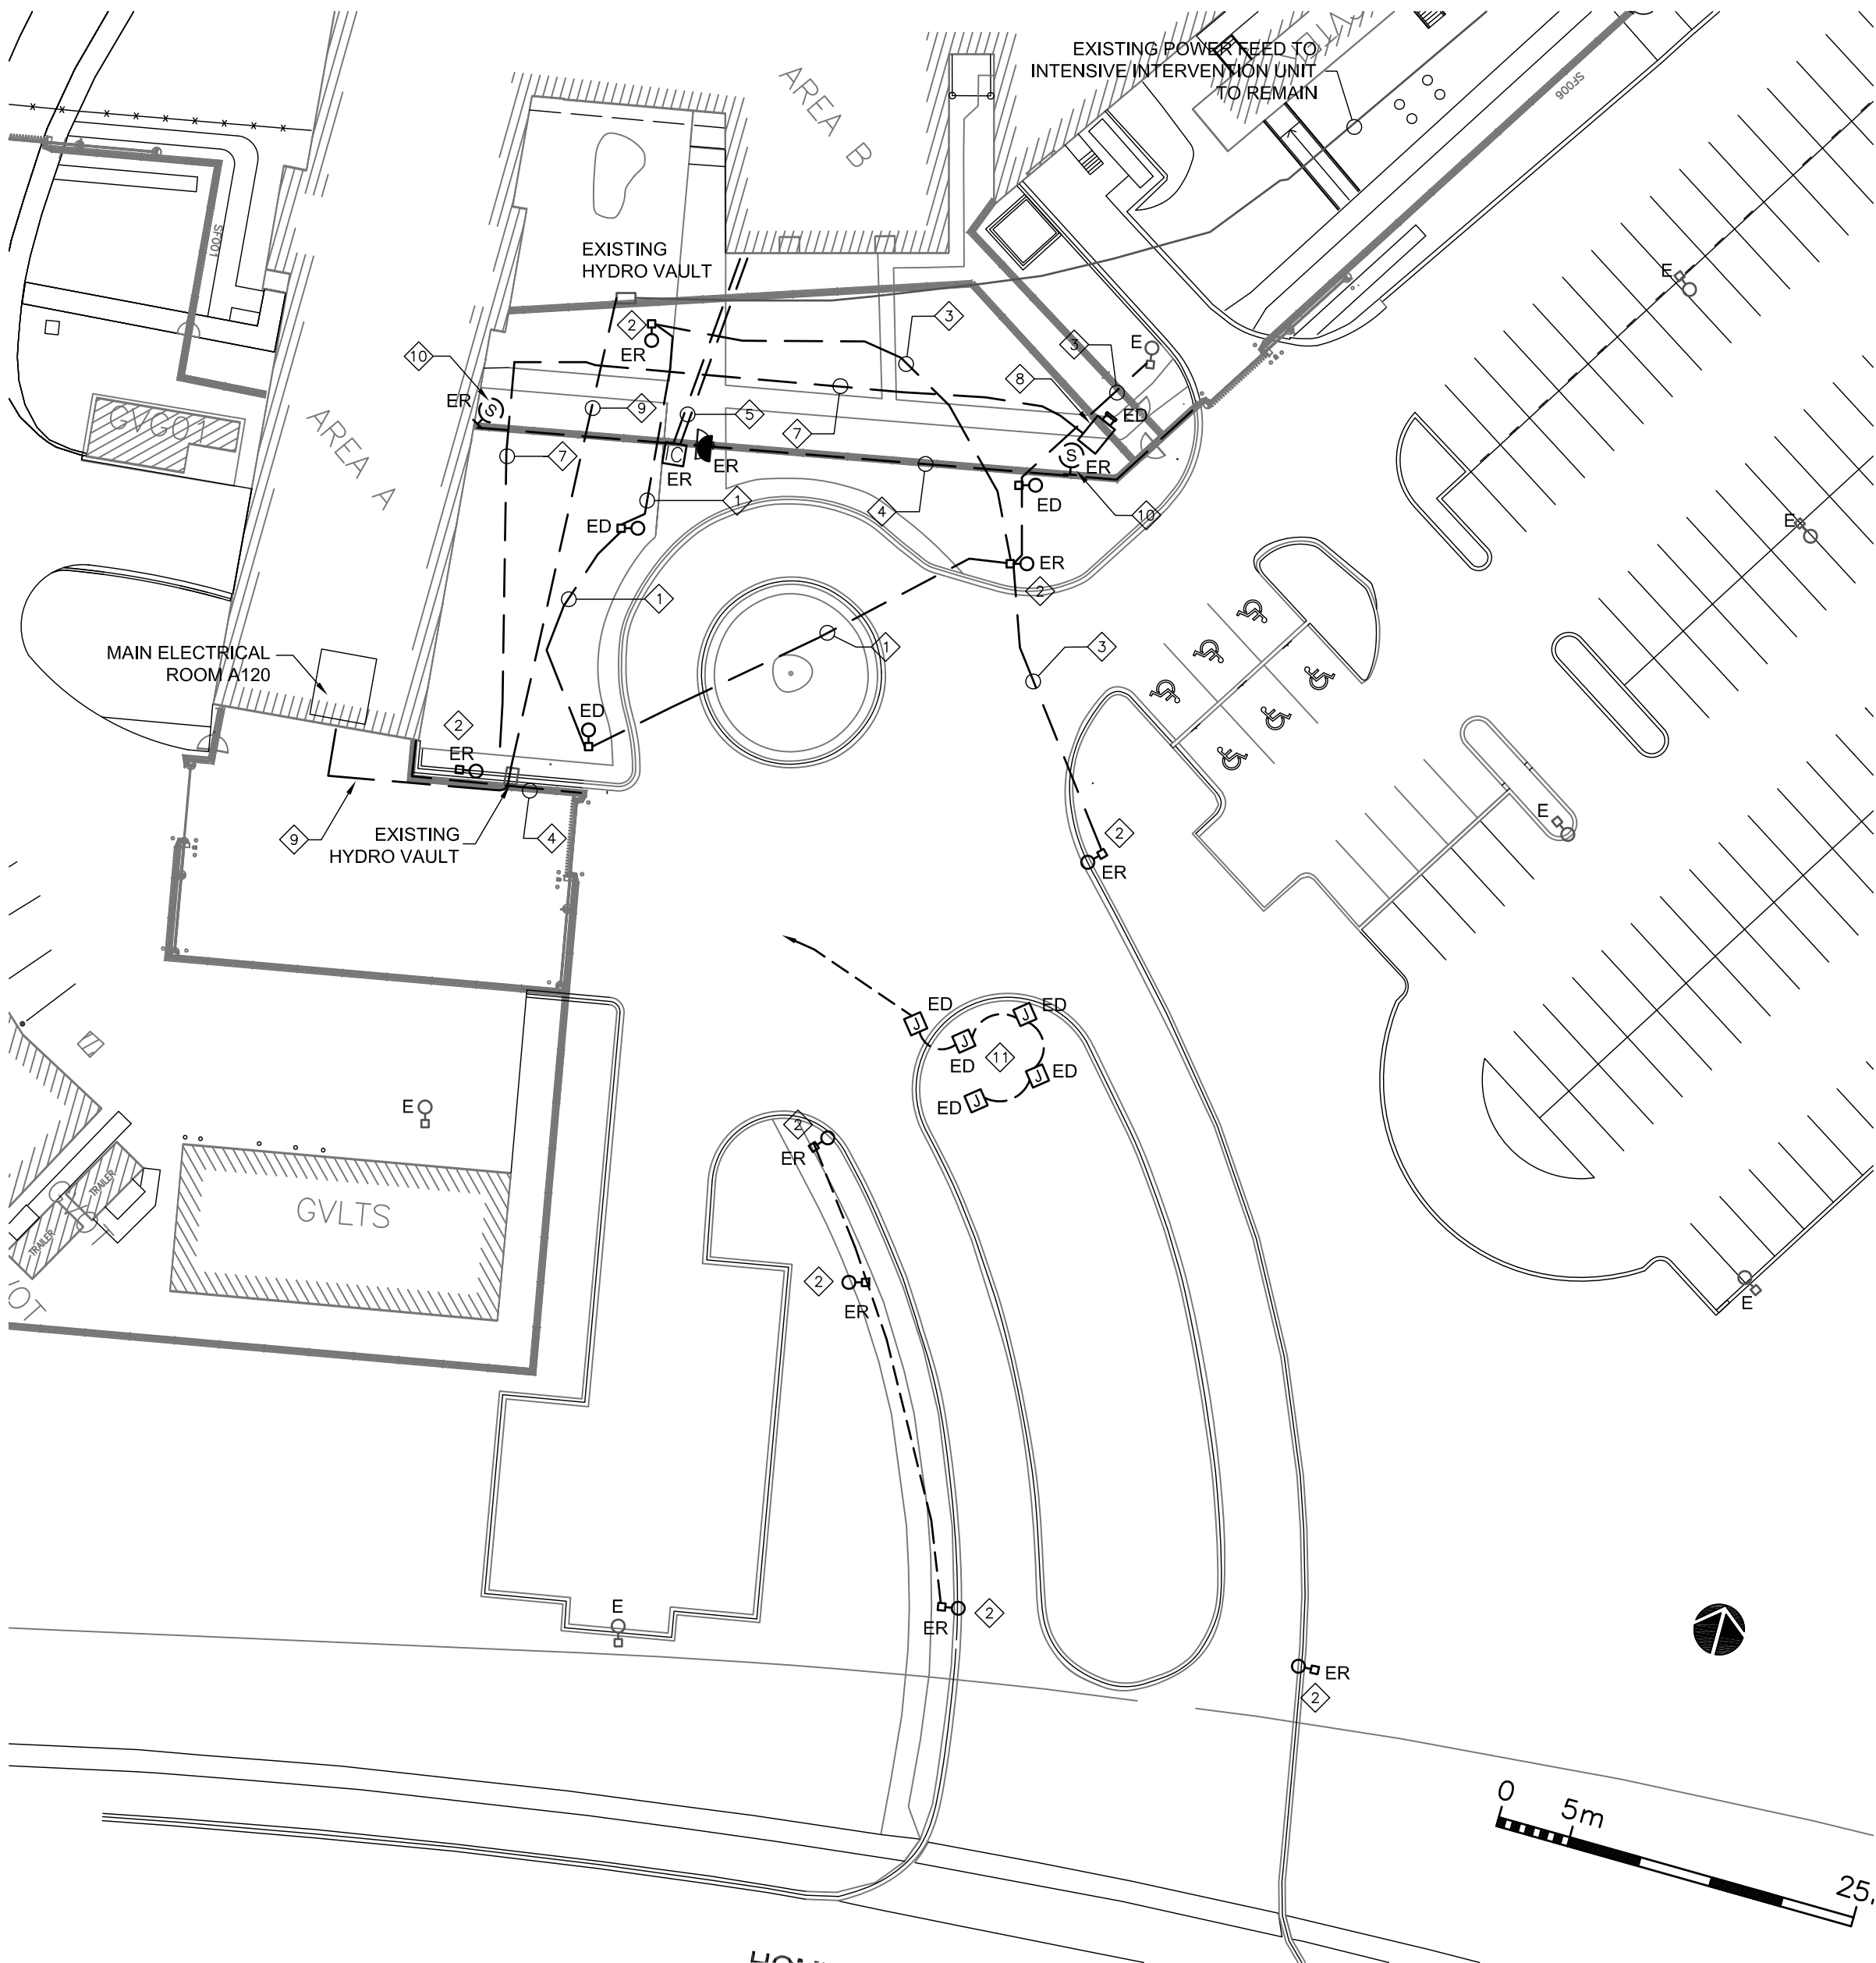

2
E1.01
DEMOLITION SITE PLAN
1:400