

**DRAWING NOTES:**


- 1 CONCRETE FOOTINGS
- 2 TYPICAL 200x300 TIMBER FRAME POST THAT EXTENDS FROM TOP OF SUB PILE CAPS TO UNDERSIDE OF POST CAPS.
- 3 TYPICAL 250x300 TIMBER POST CAP.
- 4 TYPICAL 150x200 TIMBER CROSS BRACING
- 5 TYPICAL BATTER PILE CUT OFF AT TOP OF SUB PILE CAPS.
- 6 TYPICAL 300 DIA. TIMBER PILE CAST INTO 2003 CONCRETE DECK.
- 7 TYPICAL 250x300 TIMBER SUB PILE CAP SPLICE.
- 8 CUT AND REMOVE EXISTING 250x250 CONCRETE GUARD AT END.
- 9 REMOVE RUBBER TIRE FENDERS AND REINSTALL IN EXISTING LOCATION.
- 10 EXISTING DERRICKS TO BE REMOVED AND INSTALLED BY OTHERS.
- 11 REMOVE EXISTING LADDER AND REINSTALL IN NEW LOCATION.
- 12 REMOVE EXISTING CLEAT AND REINSTALL IN NEW LOCATION.
- 13 REMOVE AND DISPOSE OF ALL EXISTING TIMBER SHEATHING, FENDERS AND WALES ON SEA SIDE AND END OF STRUCTURE.
- 14 REMOVE AND DISPOSE OF ALL EXISTING TIMBER WALES AND FENDERS ON BASIN SIDE OF STRUCTURE.
- 15 REMOVE ALL EXISTING LADDERS ON BASIN AND SEASIDES OF STRUCTURE AND REINSTALL IN EXISTING LOCATIONS.
- 16 EXISTING POWER LINES TO BE REMOVED AND INSTALLED BY OTHERS.
- 17 BENT 1E TO BE REMOVED. CONCRETE FOOTINGS AND PILES TO REMAIN.
- 18 OUTER LIMIT OF EXISTING DECK AND GUARD REMOVALS. INNER LIMIT IS DETERMINED BY LOCATION OF EXISTING CONCRETE ABUTMENT.

**LEGEND**

- MOORING CLEAT
- LADDER
- TIMBER FENDER
- TIMBER SHEATHING
- 12 BENT NUMBER
- WINCH MOTOR
- POWER SOURCE
- DERRICK
- POWER POLE
- POWER POLE WITH LIGHT STANDARD


**EXISTING CONDITIONS AND REMOVALS PLAN**

SCALE: 1:100

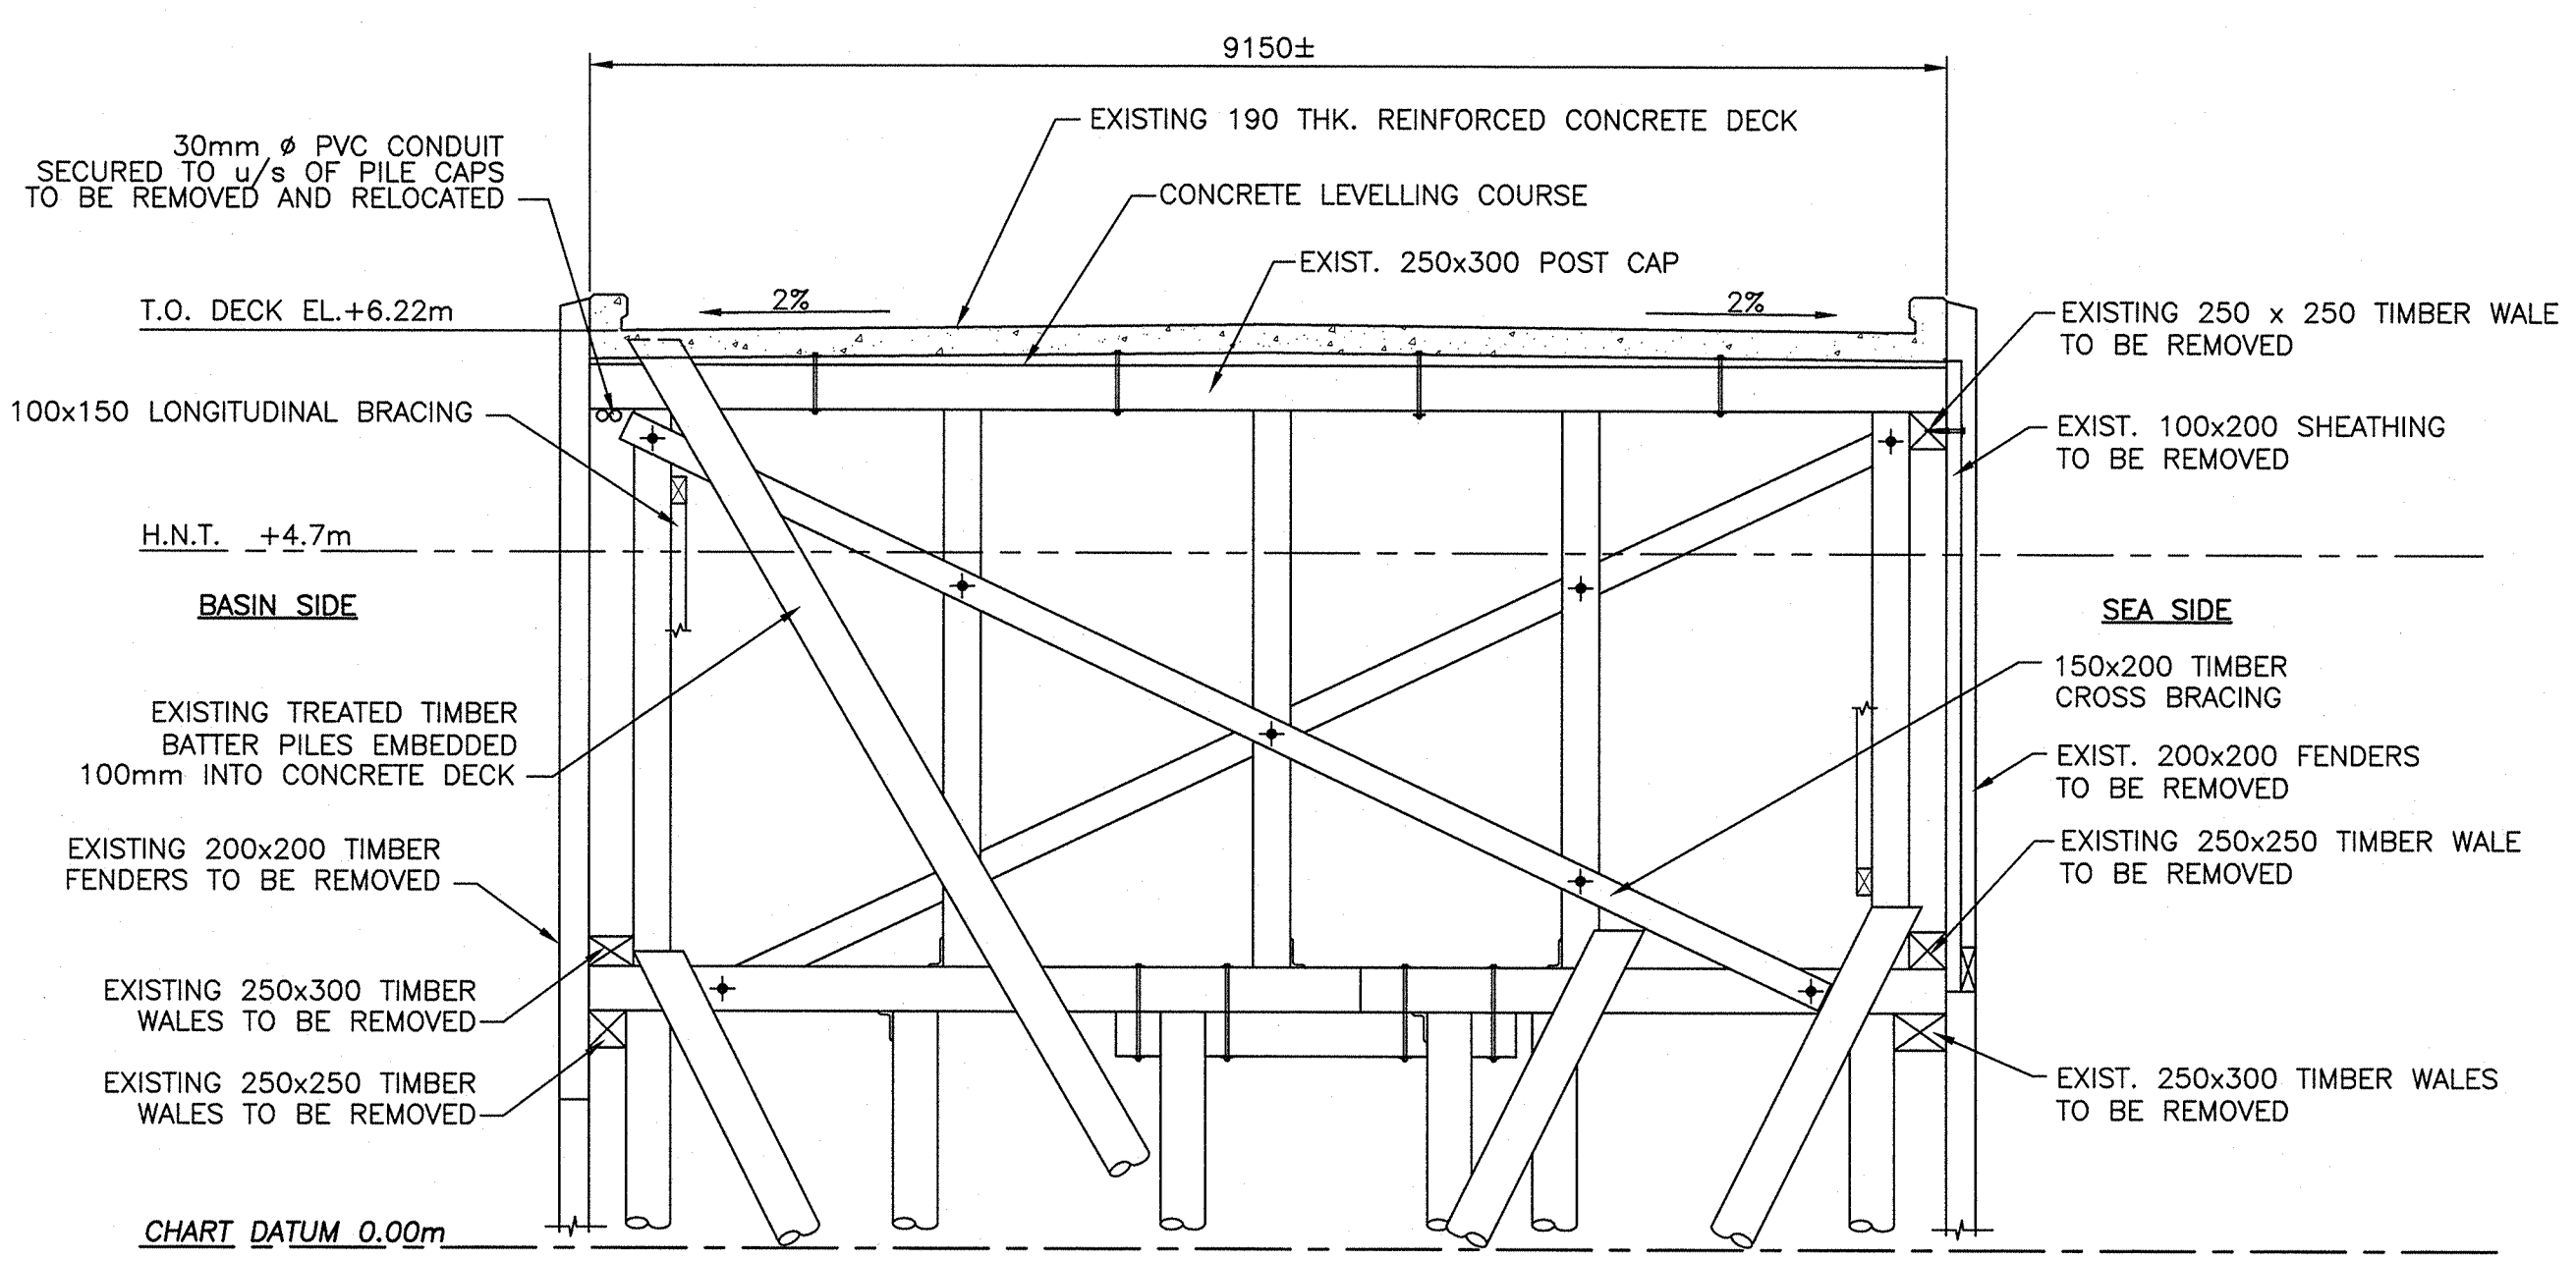

**TYPICAL EXISTING WHARF SECTION A-A**

SCALE: 1:50

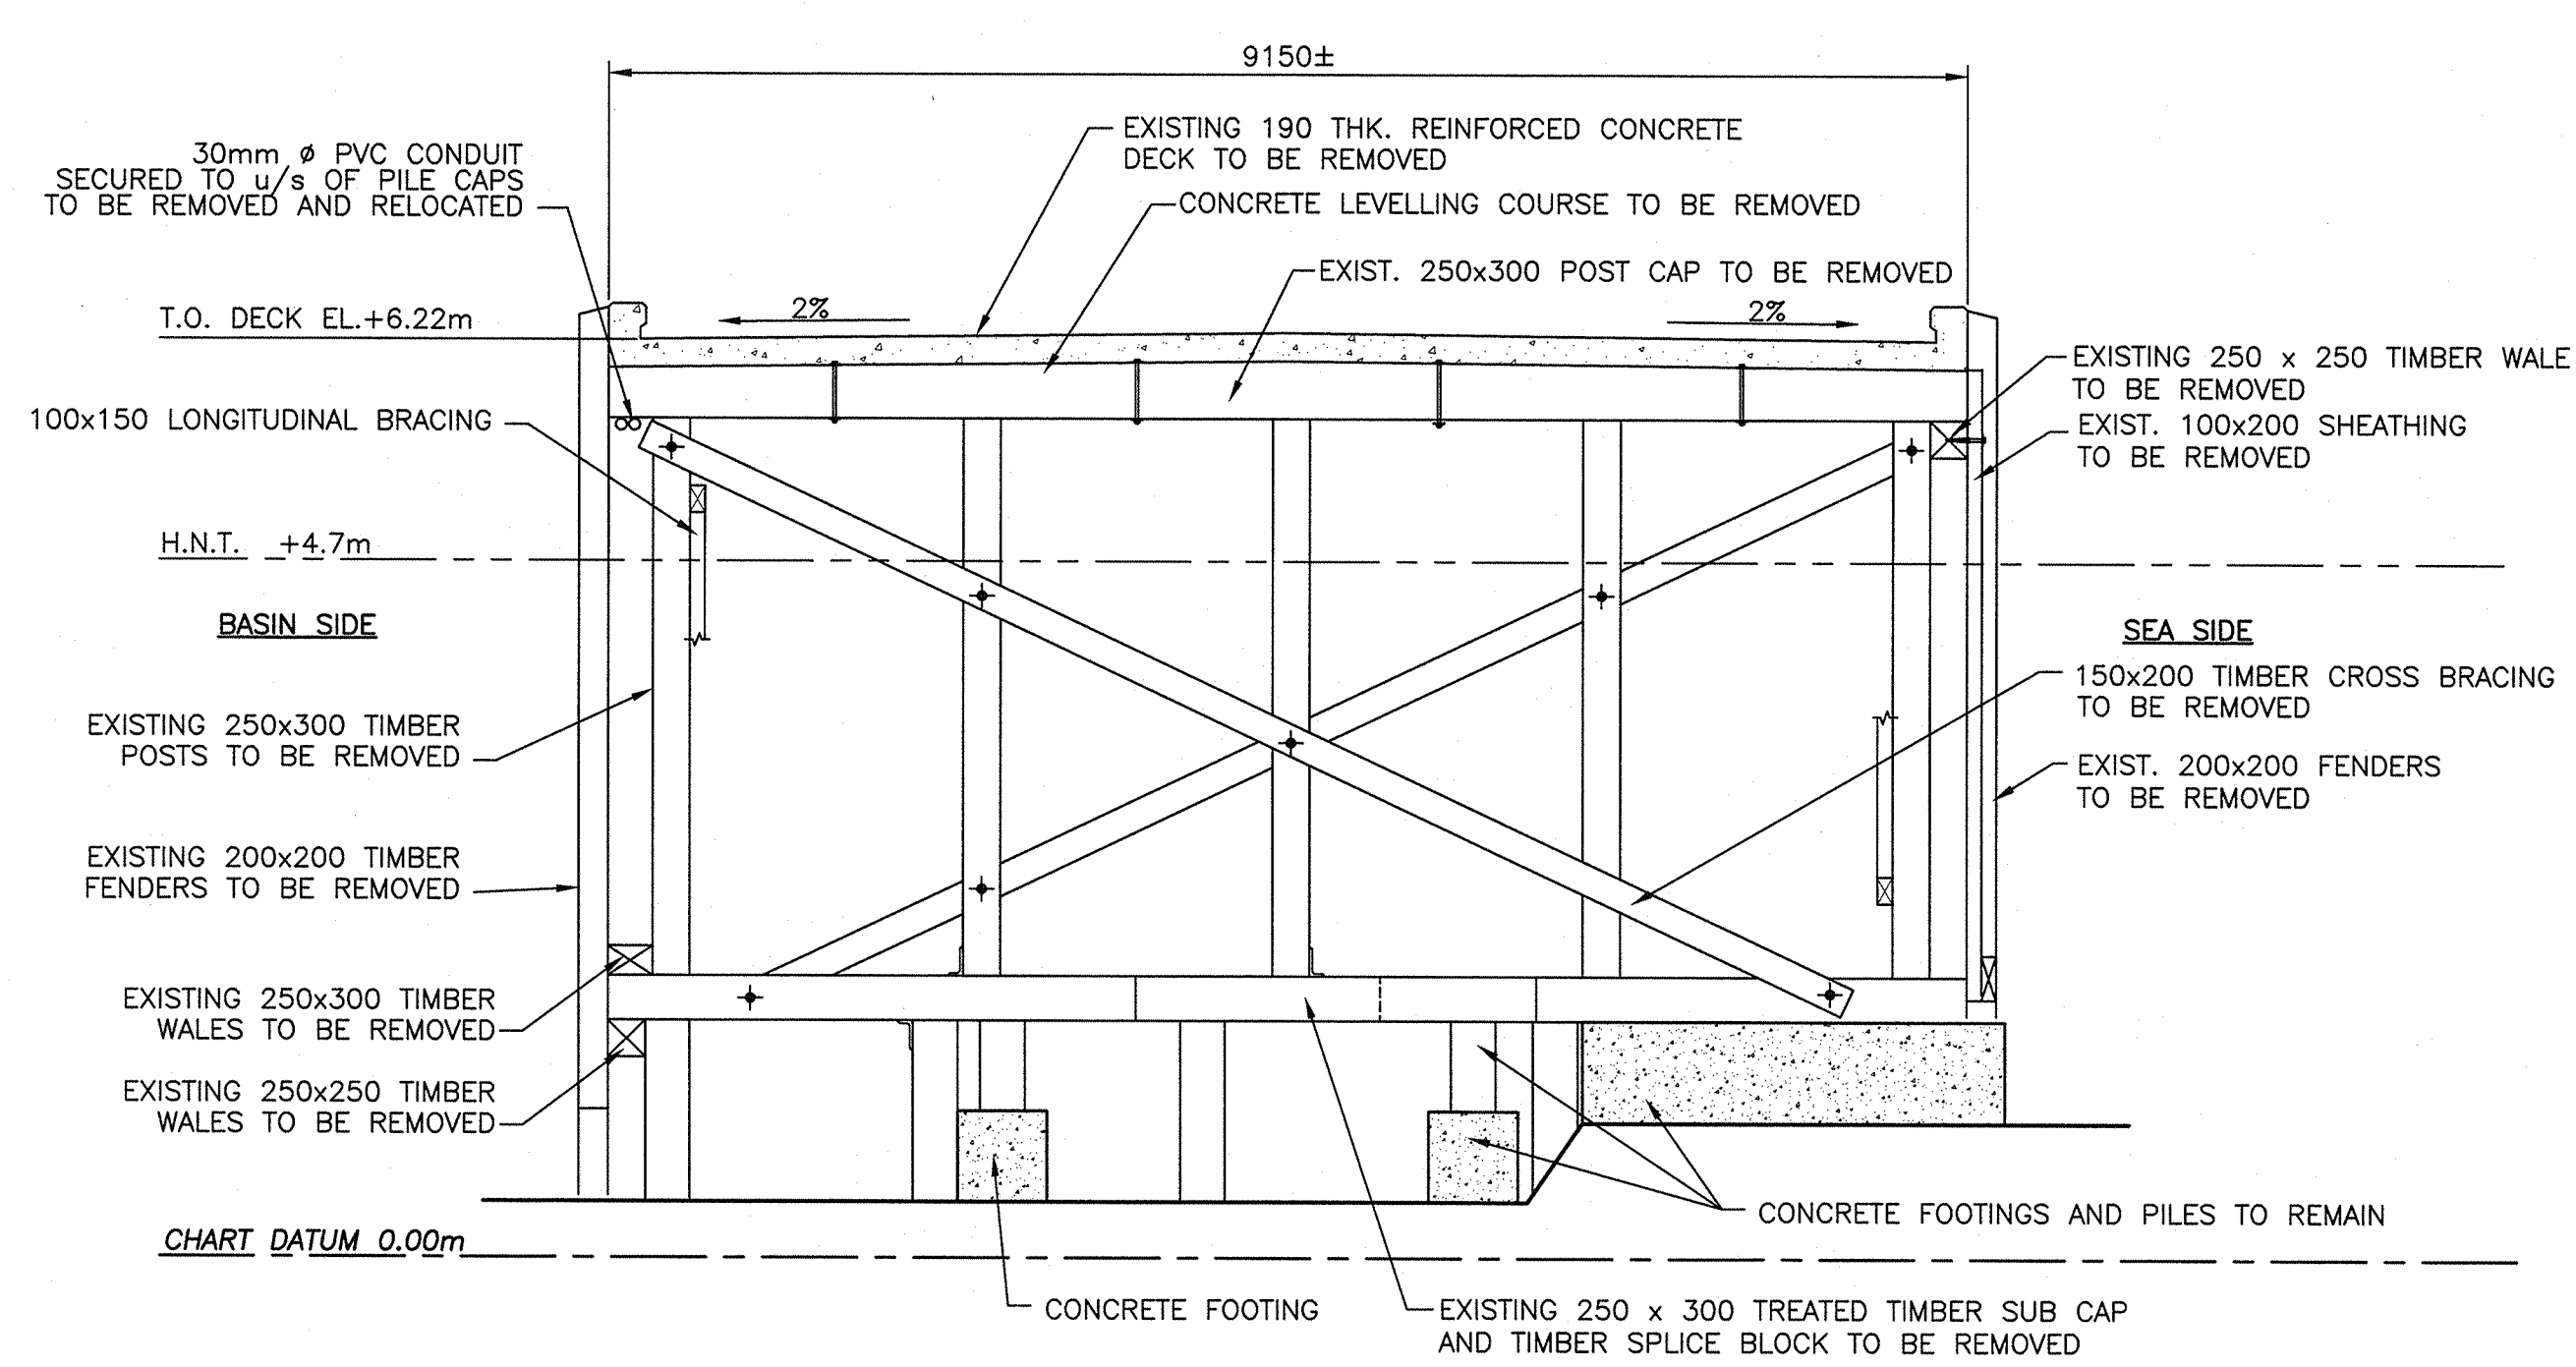

**EXISTING WHARF SECTION @ BENT 1E B-B**

SCALE: 1:50

0	ISSUED FOR TENDER	OCT 2013
revisions		date
project		project
SOUTH WHARF STRUCTURAL UPGRADE		
PINKNEY'S POINT YARMOUTH CO., NS		
drawing		dessin
EXISTING CONDITIONS AND REMOVALS PLAN AND SECTION		
designed	K. McCarthy / J. MacGillivray	conçu
date	October 2013	
drawn	George Prosper	dessiné
date	October 2013	
approved	<i>[Signature]</i>	approuvé
date		
Tender		Submission
Project Manager	2013-10-25	TPSGC
Administrateur de projets		
project number	R.064746.001	no. du projet
drawing no.		no. du dessin
Sht. 2 of 5		