



GENERAL DEMOLITION NOTES:
 - GENERAL CONTRACTOR SHALL REMOVE ALL DESIGNATED EQUIPMENT. COORDINATE DEMOLITION WITH MECHANICAL AND ELECTRICAL TRADES TO PROVIDE REQUIRED DISCONNECTS.
 - ALL ITEMS NOT RETAINED FOR REUSE OR TO BE TURNED OVER TO OWNER SHALL BECOME THE PROPERTY OF THE CONTRACTOR.
 - REFER TO MECHANICAL AND ELECTRICAL DRAWINGS AND SPECIFICATIONS FOR FURTHER DEMOLITION REQUIREMENTS.
 - OWNER WILL REMOVE FROM CONSTRUCTION AREA ANY LOOSE ITEMS OR EQUIPMENT. CONTRACTOR SHALL ONLY REMOVE THOSE ITEMS SPECIFICALLY NOTED FOR DEMOLITION. SHOULD ANY ITEM BE IN QUESTION, CHECK WITH DEPARTMENTAL REPRESENTATIVE.


DEMOLITION NOTES:
 1. REMOVE DISH WASH AREA ITEMS: SOILED DISHTABLING C/W OVERHEAD RACK AND UNDERMOUNTED HOSE REEL, SOILED ROLLER CONVEYOR, DISHWASHER, CLEAN DISH ROLLER CONVEYOR, AND WALL SHELF.
 2. REMOVE POT WASH AREA ITEMS: POT SINKS AND TABLING, WALL SHELVES (2), AND WALL MOUNTED HOSE REEL.
 3. REMOVE SOILED DISHTABLING C/W TWO PASS THRU'S AND OVERHEAD RACKING. PASS THRU OPENINGS (APPROX 200mm HIGH X 800mm WIDE) TO BE FILLED IN WITH CONCRETE BLOCK AND PLASTER FINISH TO MATCH EXISTING WALL SURFACE.
 4. REMOVE HOT WATER BOOSTER.
 5. REMOVE WALL MOUNTED HAND SINK.
 6. CUT OUT PORTION OF DOOR FRAME AND GLAZING SECTION AND RETAIN FOR REINSTALLATION. REFER TO DETAILS.
 7. REMOVE DOOR AND HARDWARE.
 8. REMOVE PLASTIC COUNTER AND EDGING ON DINING ROOM SIDE. REMOVE PLASTIC PLATE COVER ON DISH ROOM SIDE. PATCH HOLES AND REMOVE ALL SEALANT. INFILL WALL WITH CONCRETE BLOCK TO MATCH EXISTING. INSTALL NEW TILE ON DINING ROOM SIDE OVER CONCRETE BLOCK TO MATCH EXISTING WALL TILE.
 9. BREAK OUT PORTION OF STRUCTURAL SLAB AS REQUIRED FOR PLUMBING INSTALLATION (HATCHED AREA). REFER TO MECHANICAL DRAWINGS.
 10. REMOVE GREASE TRAP. REFER TO MECHANICAL DRAWINGS.

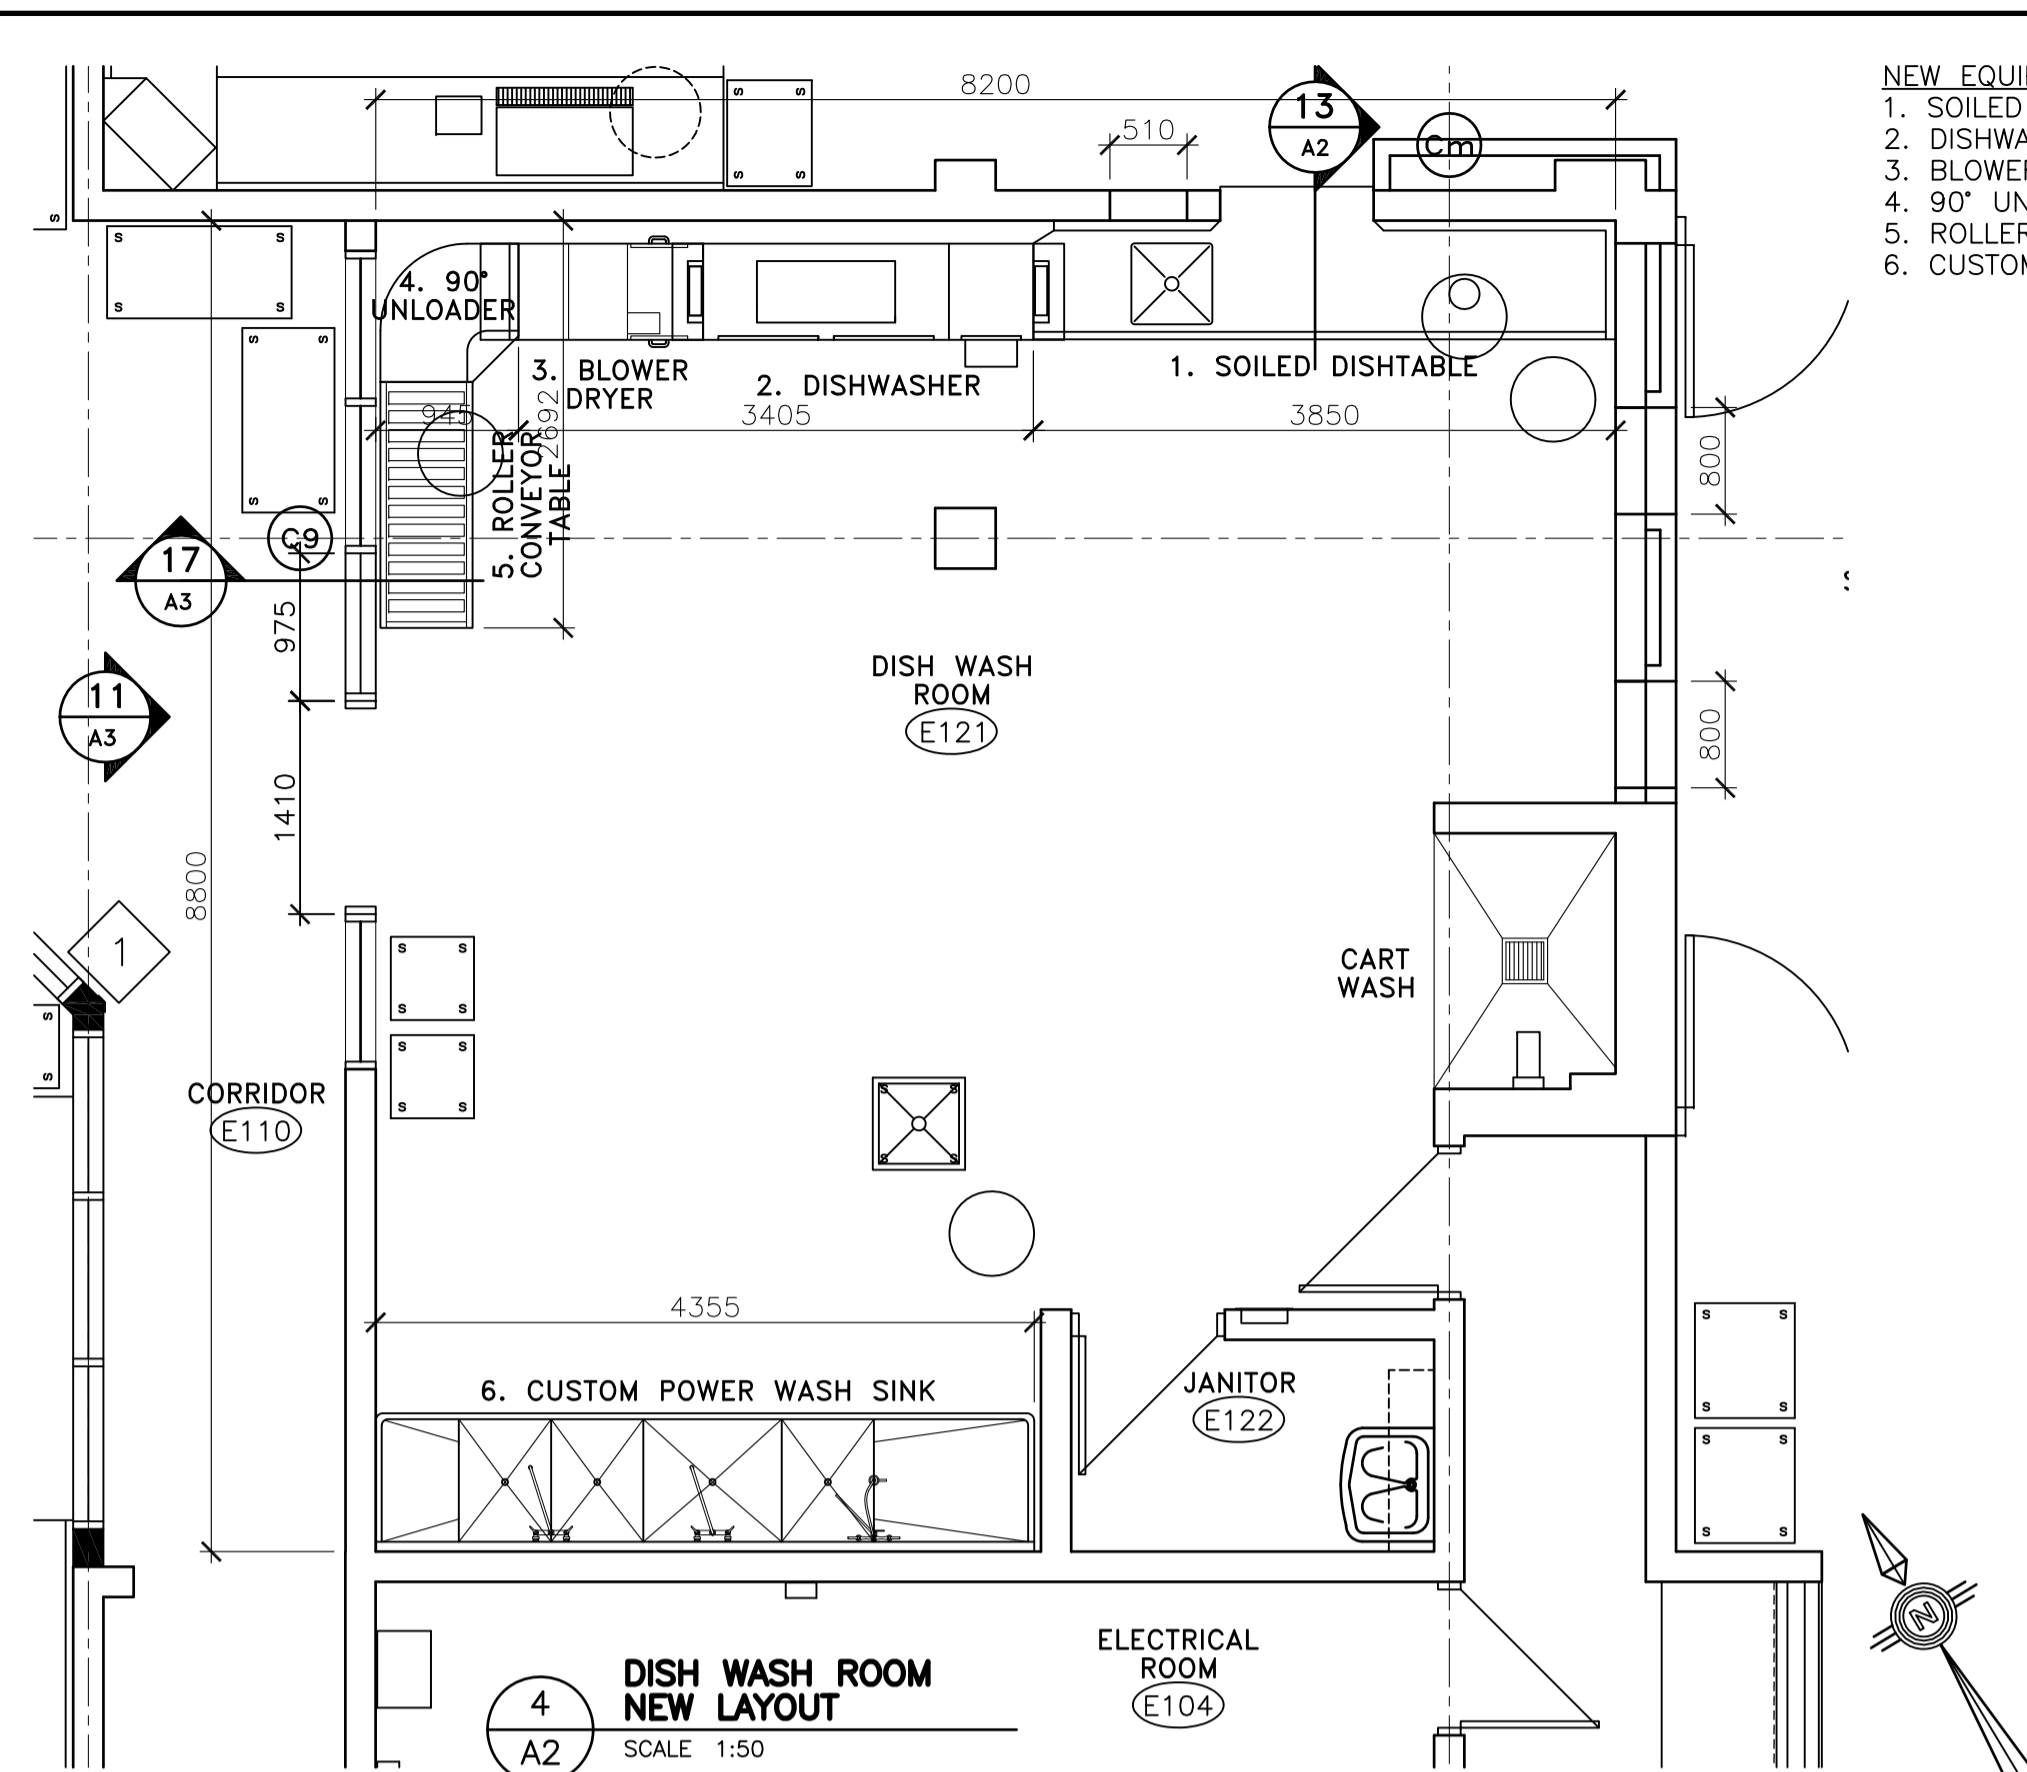


NEW EQUIPMENT LIST:
 1. SOILED DISHTABLE
 2. DISHWASHER
 3. BLOWER DRYER
 4. 90° UNLOADER
 5. ROLLER CONVEYOR TABLE
 6. CUSTOM POWER WASH SINK

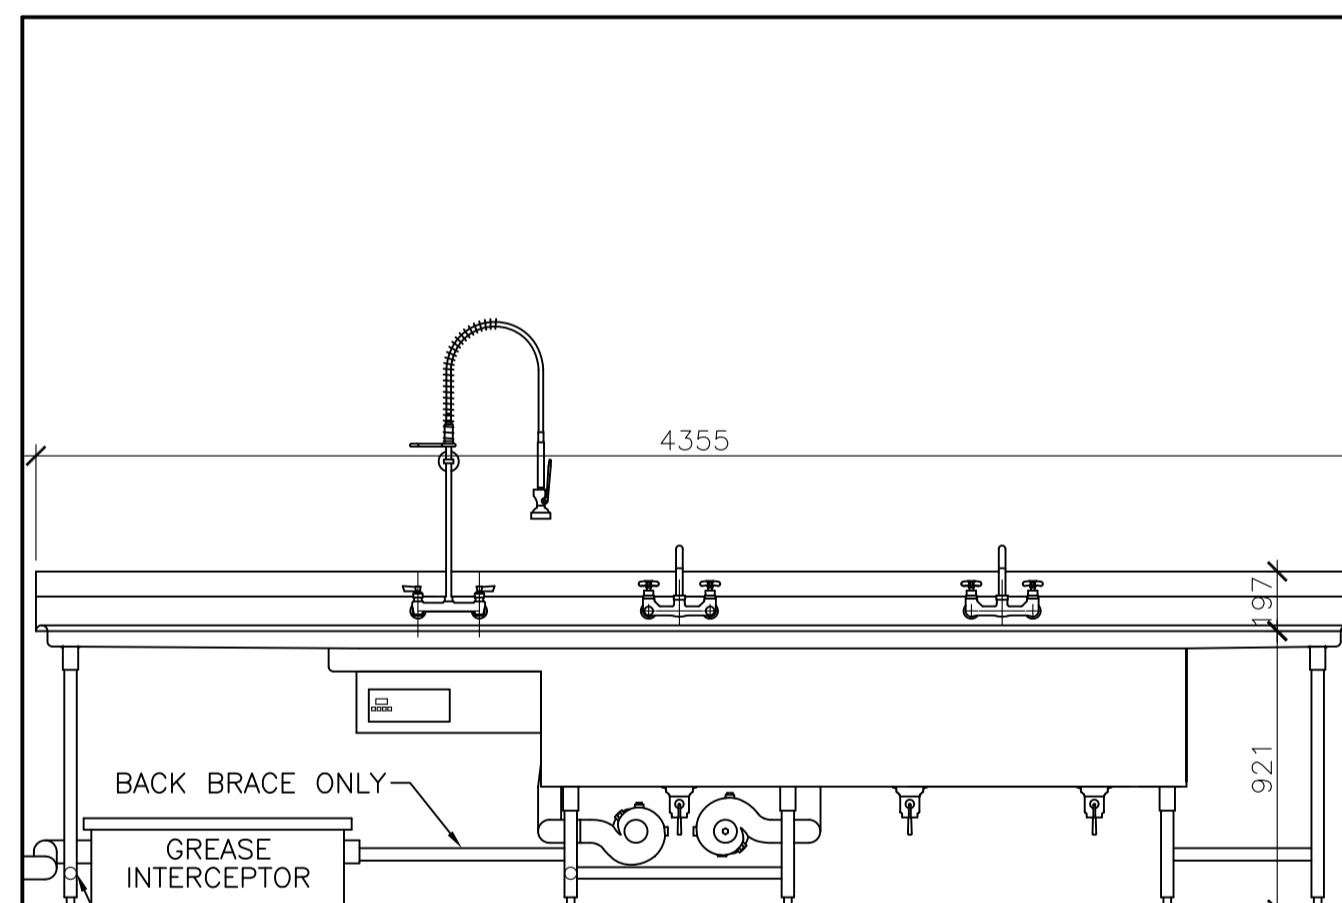


7
A2
**INTERIOR ELEVATION
POWER WASH SINK**
SCALE 1:25

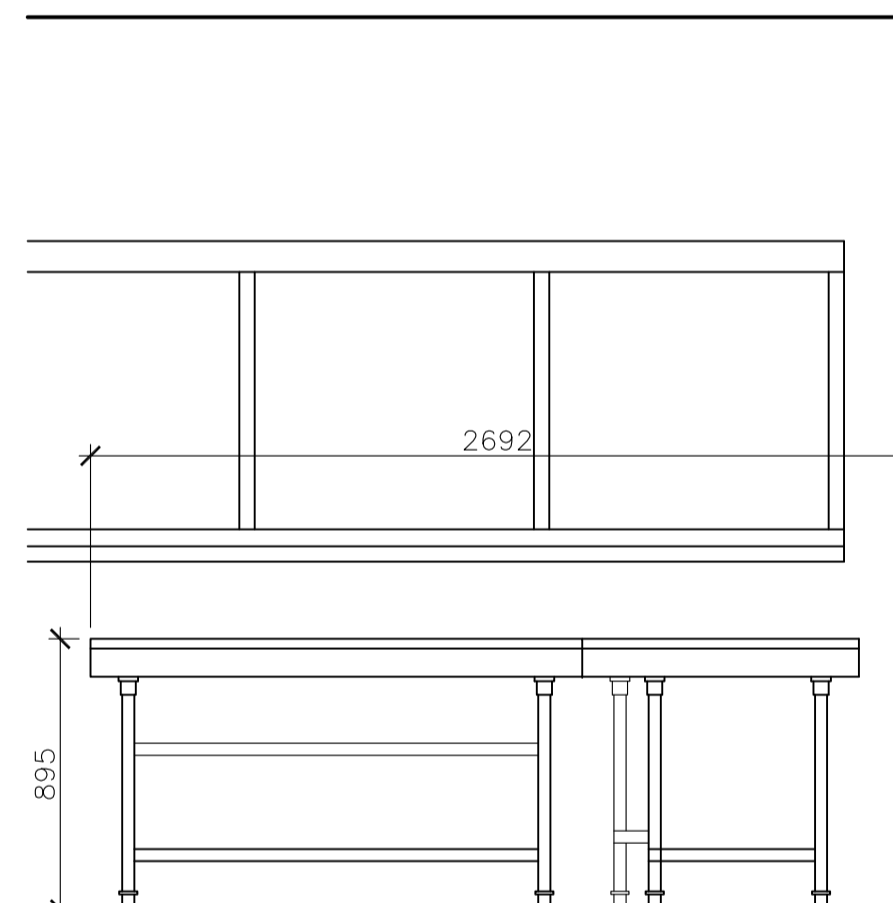


8
A2
**INTERIOR ELEVATION
CLEAN DISH CONVEYORS**
SCALE 1:25

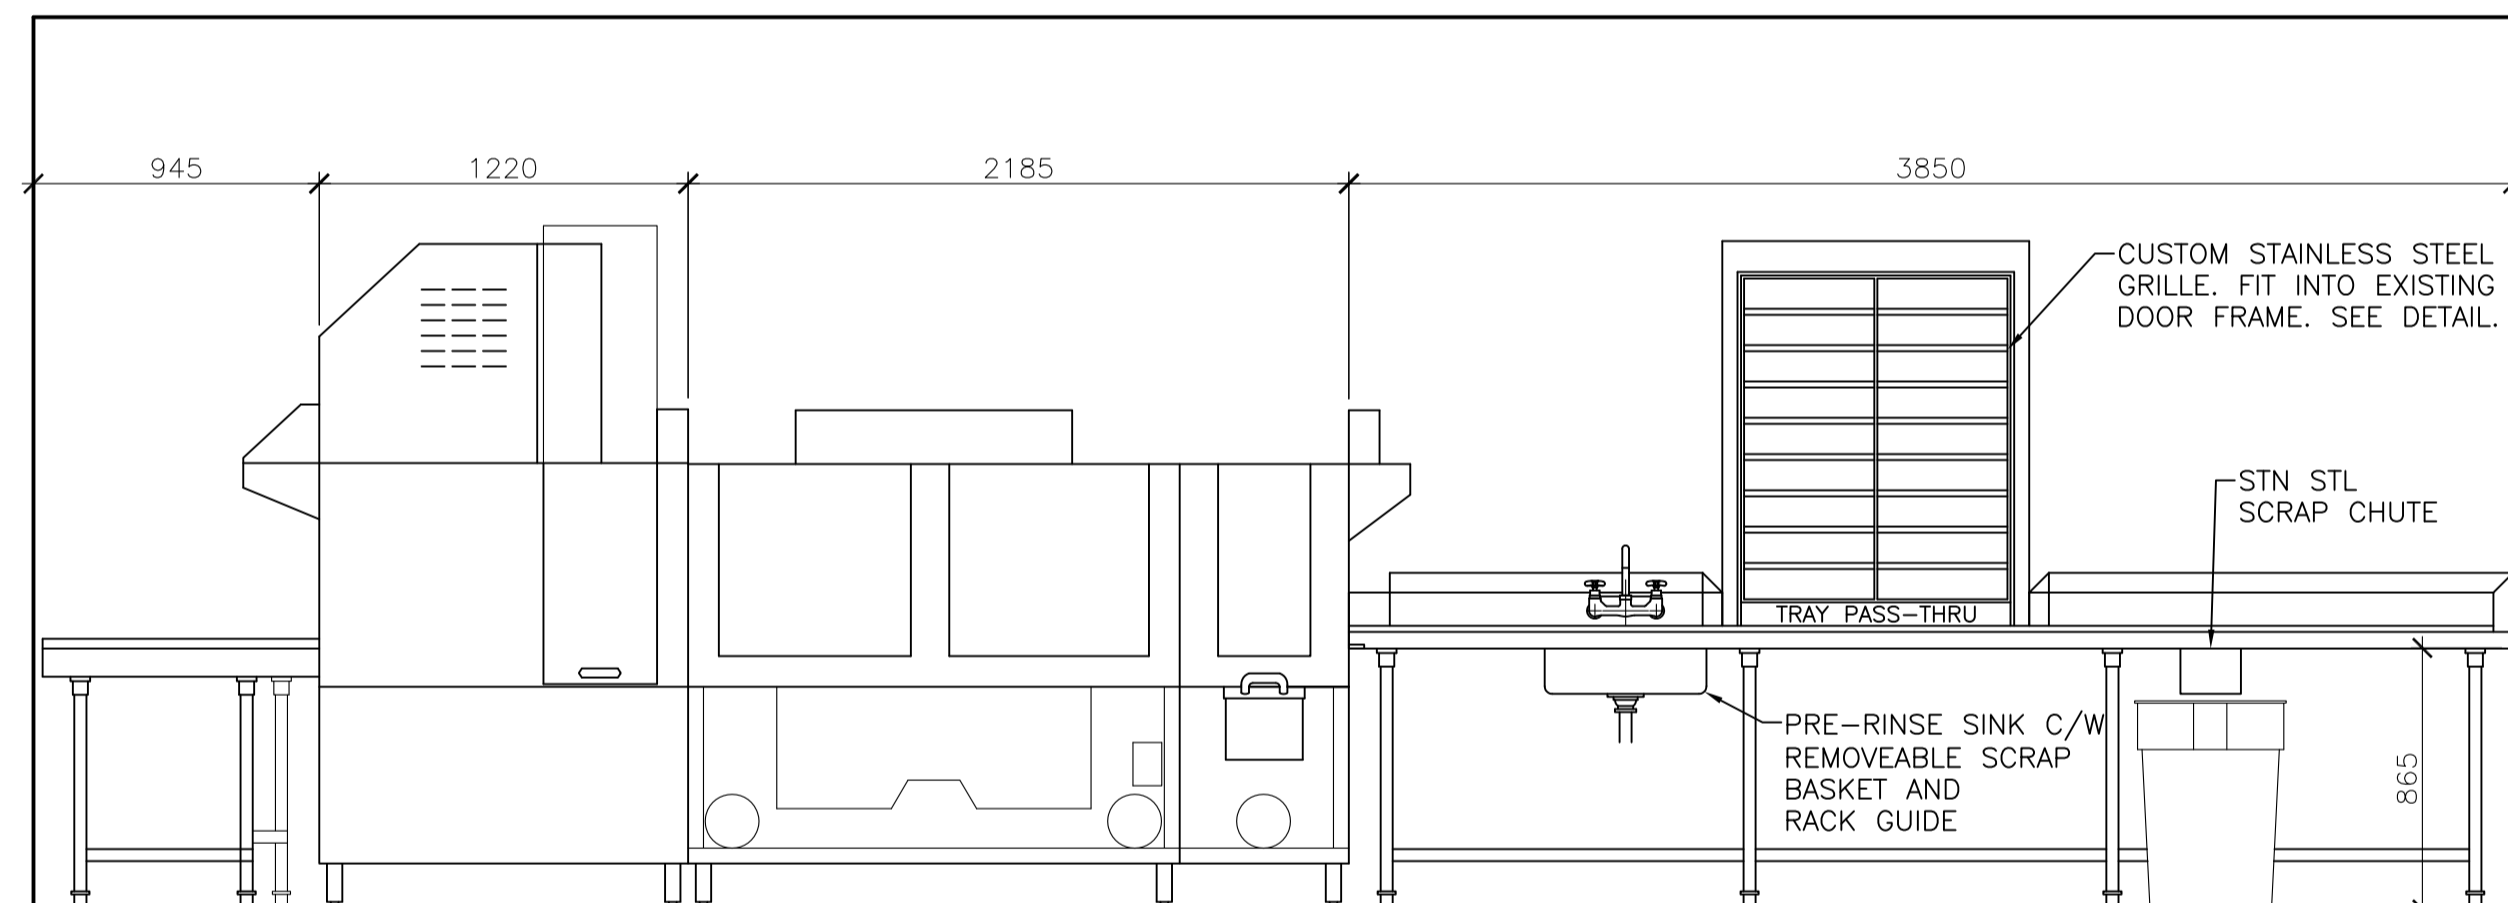


9
A2
**INTERIOR ELEVATION
DISHWASHER LINE**
SCALE 1:25

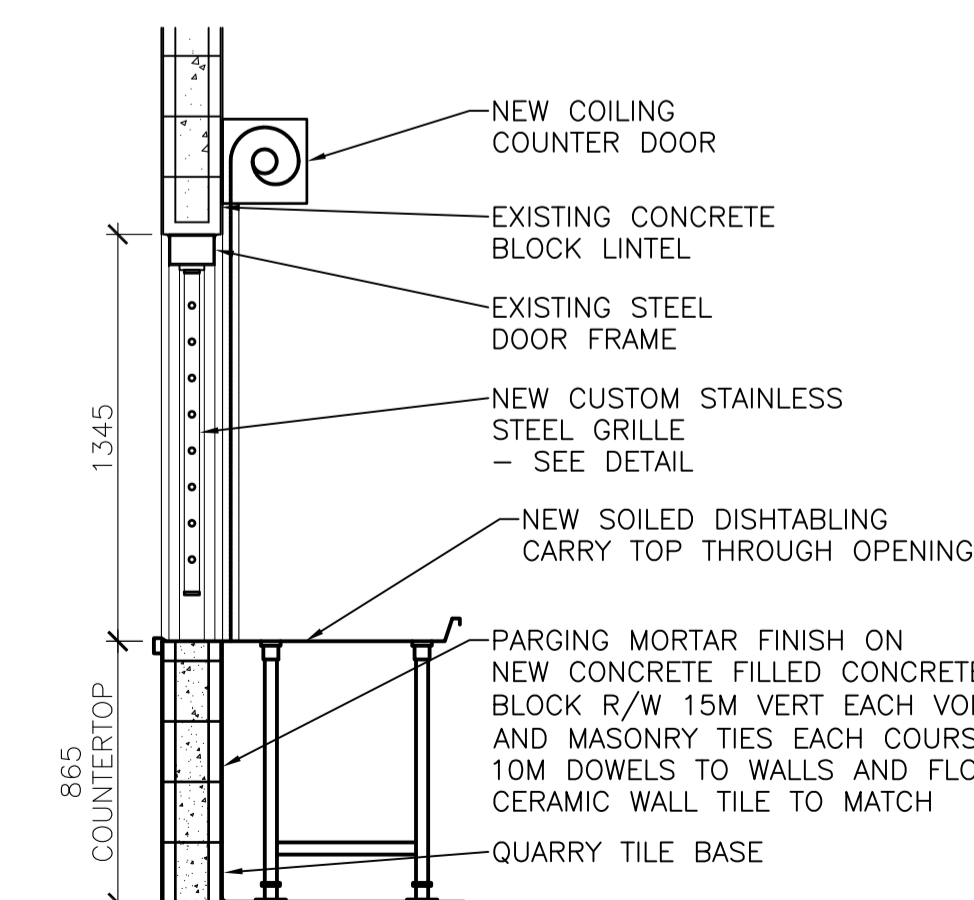


13
A2
**TRAY PASS THRU
DETAIL**
SCALE 1:25

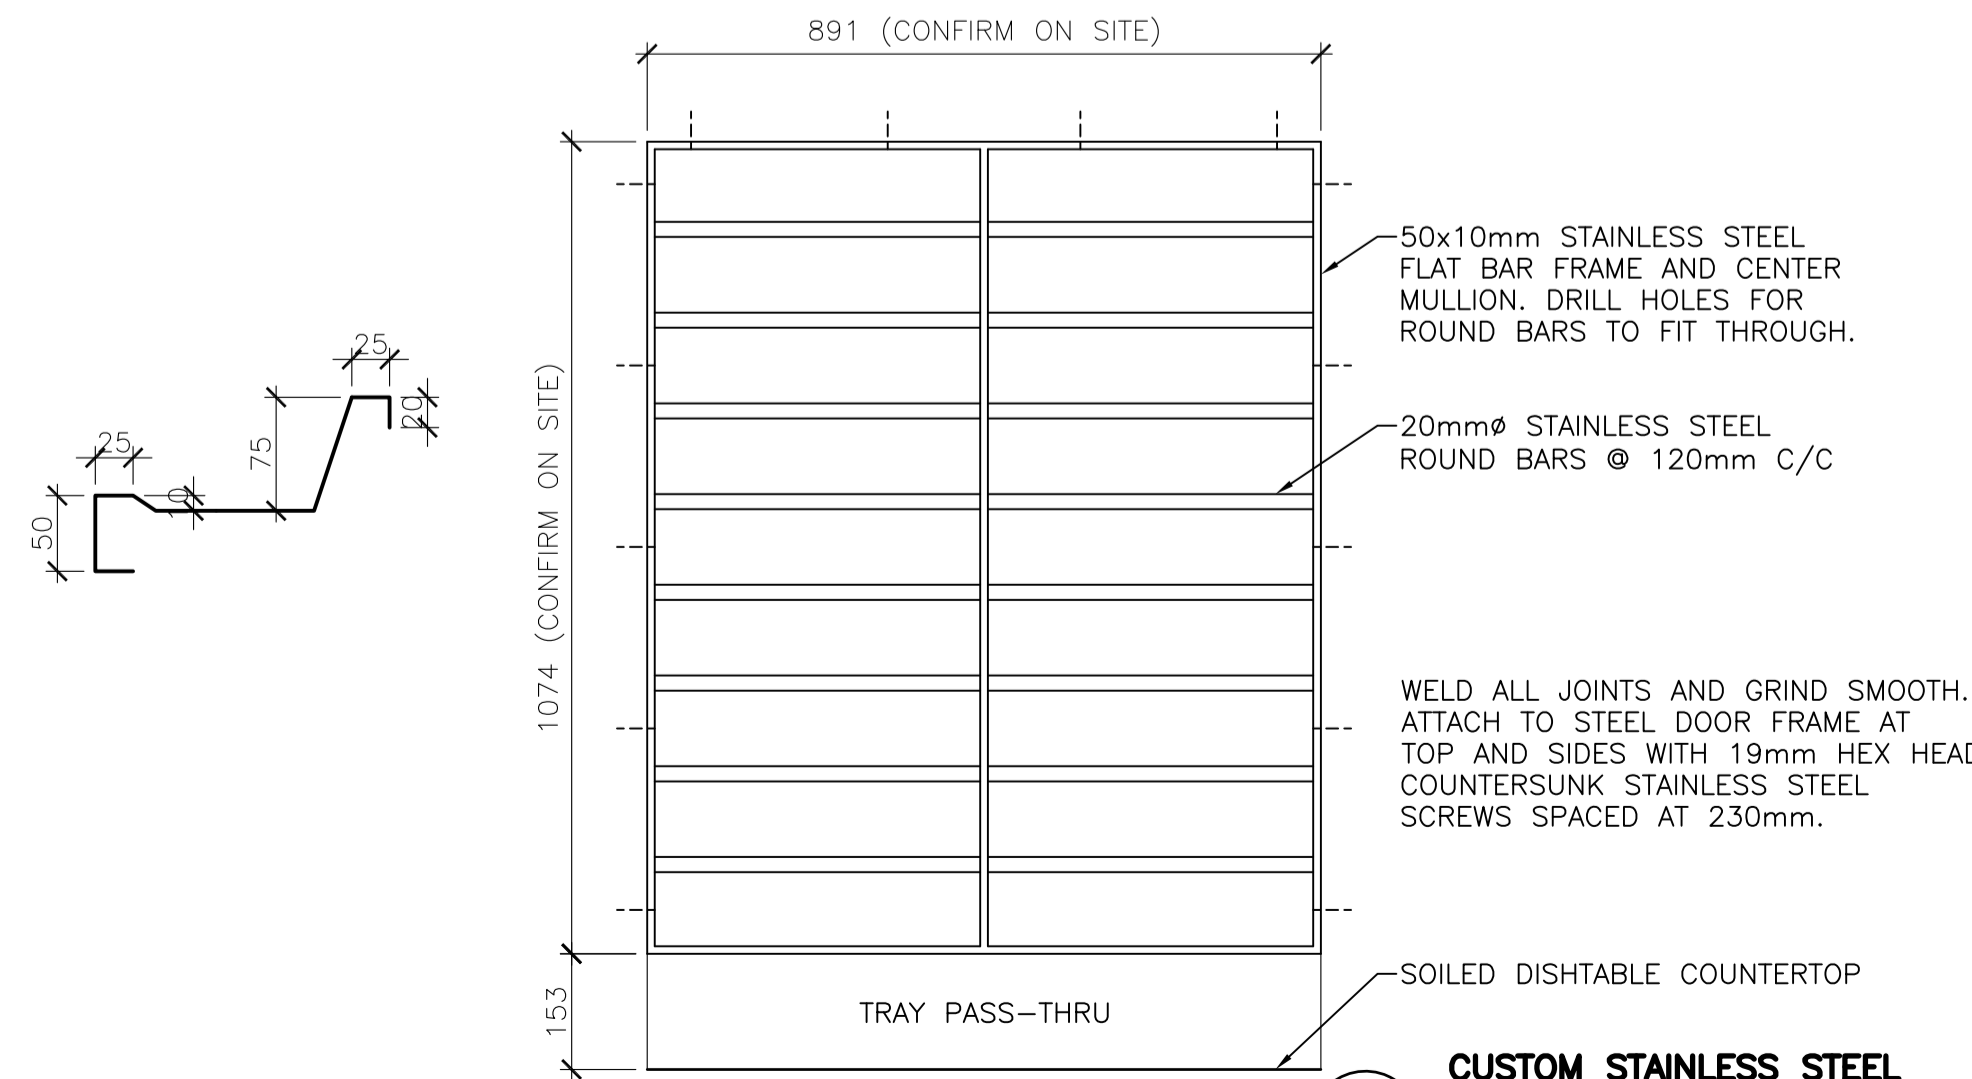

14
A2
**CUSTOM STAINLESS STEEL
GRILLE INSERT DETAIL**
SCALE 1:10

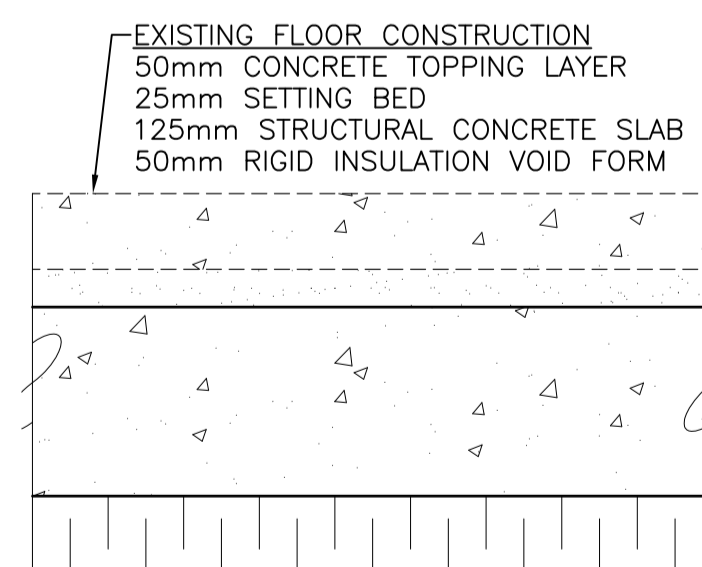


BREAK OUT AND REMOVE CONCRETE TOPPING LAYER. PROVIDE STRAIGHT SAW CUT AT EDGES. REMOVE BEDDING LAYER. BREAK OUT PORTION OF STRUCTURAL SLAB ONLY AS REQUIRED FOR NEW PLUMBING INSTALLATION.

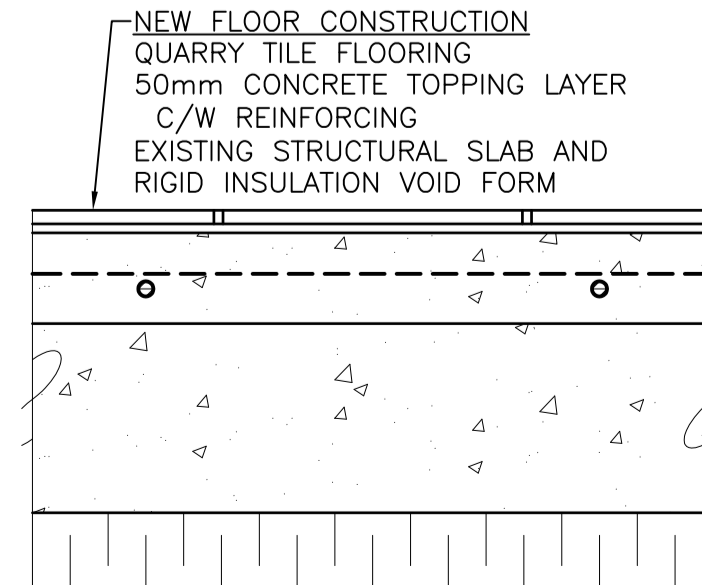


POUR NEW CONCRETE TOPPING SLAB. C/W 10M BARS @ 300mm O.C. E/W. PROVIDE MINIMUM 0.5% SLOPE TO DRAIN. REFER TO FLOOR PLAN.

15
A2
**FLOOR CONSTRUCTION
DETAILS**
SCALE 1:5

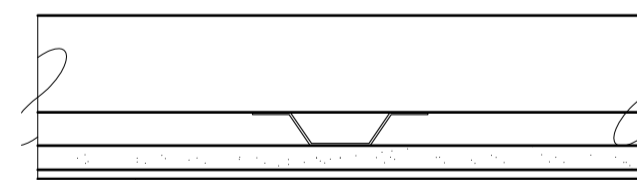


REMOVE BARKER BOARD, GYPSUM BOARD, AND FURRING CHANNELS. MAKE ALTERATIONS TO SUSPENDED METAL FRAMING AS REQUIRED TO ACCOMMODATE NEW MECHANICAL AND ELECTRICAL INSTALLATIONS. INSTALL NEW CEILING AS DETAILED.

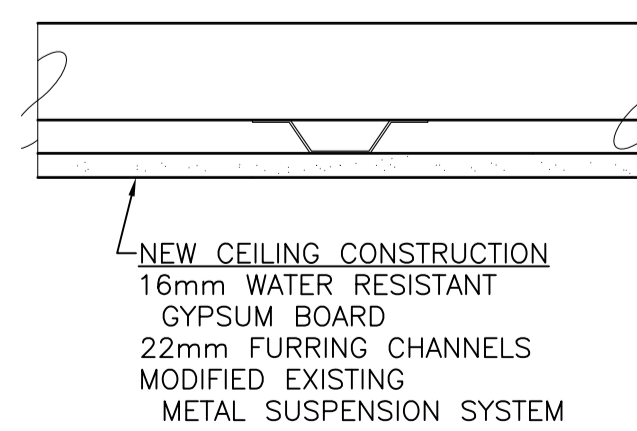

16
A2
**CEILING CONSTRUCTION
DETAIL**
SCALE 1:5

This drawing and all its contents are protected by copyright and shall not be reproduced, in whole or in part, without the expressed written consent of Field, Field & Field Architecture - Engineering Ltd. These drawings are not to be scaled. All dimensions are to face of stud or sheathing unless noted otherwise. Contractor must verify all job dimensions, all drawings, details, and specifications. Any discrepancies are to be reported to the Architect prior to proceeding with work; this includes any errors and/or omissions.

ARCHITECT
FIELD FIELD & FIELD
Architecture - Engineering Ltd.
No. 100 WINDSOR COURT 9835 - 101 AVENUE,
GRANDE PRAIRIE ALBERTA T8V 5V4
PHONE (780) 532-3690



#	####	####
#	####	####
3	ISSUED FOR TENDER	NOV 4/13
2	99% REVIEW	OCT 21/13
1	66% REVIEW	SEP 17/13
0	PRELIMINARY REVIEW	AUG 22/13
Revision/	Description/Description	Date/Date
Revision		

Client/client

**CORRECTIONAL
SERVICES
CANADA**

Project title/Titre du projet
GRANDE CACHE INSTITUTION
Bag 4000
GRANDE CACHE, ALBERTA
FOOD SERVICES
DISH ROOM REVITALIZATION

Approved by/Approuvé par
RJF

Designed by/Concept par
DRP

Drawn by/Dessiné par
DRP

PWGC Project Manager/Administrateur de Projets TPSCG
YVON LABRECQUE

PWGC Architectural and Engineering Resources Manager/
Ressources Architectural et de Directeur d'ingénierie, TPSCG

Client/client
RON J. FAHL

Drawing title/Titre du dessin

DISH WASH ROOM DEMOLITION PLAN
DISH WASH ROOM NEW LAYOUT

Project No./No. du projet	Sheet/Feuille	Revision no./Révision no.
R.061948.001	A2 OF 3	3