

RETURN BIDS TO:
RETOURNER LES SOUMISSIONS À:
Bid Receiving
PWGSC
33 City Centre Drive
Suite 480
Mississauga
Ontario
L5B 2N5
Bid Fax: (905) 615-2095

SOLICITATION AMENDMENT MODIFICATION DE L'INVITATION

The referenced document is hereby revised; unless otherwise indicated, all other terms and conditions of the Solicitation remain the same.

Ce document est par la présente révisé; sauf indication contraire, les modalités de l'invitation demeurent les mêmes.

Comments - Commentaires

Vendor/Firm Name and Address
Raison sociale et adresse du
fournisseur/de l'entrepreneur

Issuing Office - Bureau de distribution
Public Works and Government Services Canada
Ontario Region
33 City Centre Drive
Suite 480
Mississauga
Ontario
L5B 2N5

Title - Sujet Mobile Shelving	
Solicitation No. - N° de l'invitation EQ411-141502/A	Amendment No. - N° modif. 002
Client Reference No. - N° de référence du client EQ411-141502	Date 2014-01-08
GETS Reference No. - N° de référence de SEAG PW-\$TOR-033-6449	
File No. - N° de dossier TOR-3-36213 (033)	CCC No./N° CCC - FMS No./N° VME
Solicitation Closes - L'invitation prend fin at - à 02:00 PM on - le 2014-01-16	
Time Zone Fuseau horaire Eastern Standard Time EST	
F.O.B. - F.A.B. Plant-Usine: <input type="checkbox"/> Destination: <input checked="" type="checkbox"/> Other-Autre: <input type="checkbox"/>	
Address Enquiries to: - Adresser toutes questions à: Martin, Lesley	Buyer Id - Id de l'acheteur tor033
Telephone No. - N° de téléphone (905) 615-2076 ()	FAX No. - N° de FAX (905) 615-2060
Destination - of Goods, Services, and Construction: Destination - des biens, services et construction:	

Instructions: See Herein

Instructions: Voir aux présentes

Delivery Required - Livraison exigée	Delivery Offered - Livraison proposée
Vendor/Firm Name and Address Raison sociale et adresse du fournisseur/de l'entrepreneur	
Telephone No. - N° de téléphone Facsimile No. - N° de télécopieur	
Name and title of person authorized to sign on behalf of Vendor/Firm (type or print) Nom et titre de la personne autorisée à signer au nom du fournisseur/ de l'entrepreneur (taper ou écrire en caractères d'imprimerie)	
Signature	Date

AMENDMENT 002 ANSWERS QUESTIONS FROM POTENTIAL SUPPLIERS AND MAKES CHANGES TO ANNEX A - REQUIREMENT

Question & Answer

Q1. The client mentioned that it would be advantageous to have a modular/reusable system without grout. However the specification lists that grout is a requirement (Annex A-3.8). Should this be eliminated from the specification?

A1. The specification remains unchanged

Q2. Annex A-4.1 lists that $\frac{3}{4}$ " thick exterior grade plywood is to be used. This can be supplied, however, the client mentioned that it would be advantageous to have a modular/reusable system as the system will be required to be relocated in approximately 5 years. We would highly recommend using a fully-finished demountable floor system where all parts can be completely reused. However, this would cost considerably more than simple plywood decking, but could lead to significant long term cost savings when the system is required to be relocated. Also, this would be a much more environmentally friendly solution. Will particular attention be paid to the track/decking & floor finishing's ability to be relocated and reused?

A2. The exterior grade plywood specification remains unchanged

Q3. Annex A- 10.2 lists two different shelving depths, 15" and 24". It was also mentioned during the site visit that 18" deep shelves would be ideal for the client. Can you please clarify what shelving depth is required and in what specific areas? Please provide nominal and actual/useable sizes.

A3. 18" deep shelves are required. See Amendment below.

Q4. What is the required shelf height clearance/opening?

A4. 12" as per Annex A - Requirement, 1.2

Q5. What is the minimum aisle size required?

A5. See Annex A - Requirement, Appendix 2, 2.1

Q6. Where both ends of a carriage are exposed do you want end panels on both sides?

A6. Yes.

Q7. Where both ends of a carriage are exposed do you want dual access? This would mean placing control/operating handles on both ends.

A7. No.

Q8. What hours can be worked for installation and can we perform installation during weekends/overnight hours?

A8. See Annex A - Requirement, 2.10

-
- Q9.** Are we to design a system to maximize the capacity within the areas outlined in the drawings provided? (4 system areas - A, B, C, D)
- A9.** No - the system must meet the size specifications as outlined in Annex A - Requirement
- Q10.** What are the number of filing inches required for each area? Please provide nominal and actual/useable.
- A10.** See Annex A - Requirement, 1.2
- Q11.** Can you please provide an approximation of the current/pre-existing linear filing inches? Please provide nominal and actual/useable, if possible.
- A11.** This information is not available at this time.
- Q12.** Will the winner of the bid will become the owner of the dismantled shelving - can they sell it as scrap for example?
- A12.** Yes, as per Annex B - Basis of Payment, 2.
- Q13.** How do you want the files to be temporarily stored?
- A13.** See Annex A - Requirement, 1.3, i.
- Q14.** Will the client require access to the files during installation?
- A14.** Yes
- Q15.** During the site visit it was mentioned that the system could be extended further than the pre-existing footprint. Can you please provide the maximum amount we can extend the system outside the existing footprint?
- A15.** 12"
- Q16.** Once the files are in the temporary room, can we use individuals that do not have a reliability status on the dismantle and re-install only?
- A16.** No
- Q17.** What does the individual Secured-Lockable with unique System key set mean?
- A17.** Each system has a unique key
- Q18.** The stopping distance must be 2" max under any operating of loading conditions?
- A18.** Variance of 2" on carriage stop
- Q19.** Will you accept 2" center dividers?
- A19.** Yes

Q20. Page 18, is this security screen mesh we need to install on top as well as the vertical mesh or just across the top?

A20. There will be no meshing on the top (ceiling of the unit).

Q21. What does 'all shelving secured with fasteners' mean?

A21. Commonly done with nuts and bolts but there are also other fastening options

Q22. If we are delivering the product, does the freight carrier have to have a reliability status if only taking the product to the loading dock and not to the floor?

A22. No

Q23. It was mentioned during the site visit that the client wants VCT tile on the floor of the system, can you please verify this?

A23. Flooring needs to be applied to support the particulars of the vendor system and ensure entrance to the unit is flush or graded to floor level for access and health and safety needs.
Subflooring with VCT tile is one such solution.

Q24. Does the client require fire retardant wood in the sub floor of the mobile system?

A24. The use of fire retardant materials in construction for project in a federal space is always encouraged.

Q25. We need further clarification on the security locks for the systems as it seemed like the client was not sure what they require during the site visit.

A25. Requirement remains unchanged

Q26. We are requesting an extension to the closing date.

A26. The closing date remains unchanged.

Amendment

At ANNEX A - REQUIREMENT, 6. CARRIAGE, 6.9

Delete: in its entirety

Insert:

6.9 All carriage components must be capable of carrying a minimum static and moving carriage load of 700 pounds per linear foot (1342 kg per lineal meter) of carriage.

At ANNEX A - REQUIREMENT, 7. WHEELS, 7.2

Delete: in its entirety

Insert:

Solicitation No. - N° de l'invitation

EQ411-141502/A

Amd. No. - N° de la modif.

002

Buyer ID - Id de l'acheteur

tor033

Client Ref. No. - N° de réf. du client

EQ411-141502

File No. - N° du dossier

TOR-3-36213

CCC No./N° CCC - FMS No/ N° VME


7.2 Each movable carriage must have a minimum of six guide wheels per rail (i.e. a minimum of six wheels per movable carriage). Guide wheels must be machined with flanges on both sides of the wheel.

At ANNEX A - REQUIREMENT, 10. FOUR POST SHELVING, 10.2

Delete: in its entirety

Insert:

10.2 As a minimum, shelves must accommodate legal type files & available in the following depth:18 in. See Appendix 1 for location shelf widths. A tolerance of \pm mm 12.7 (\pm in.) is acceptable.

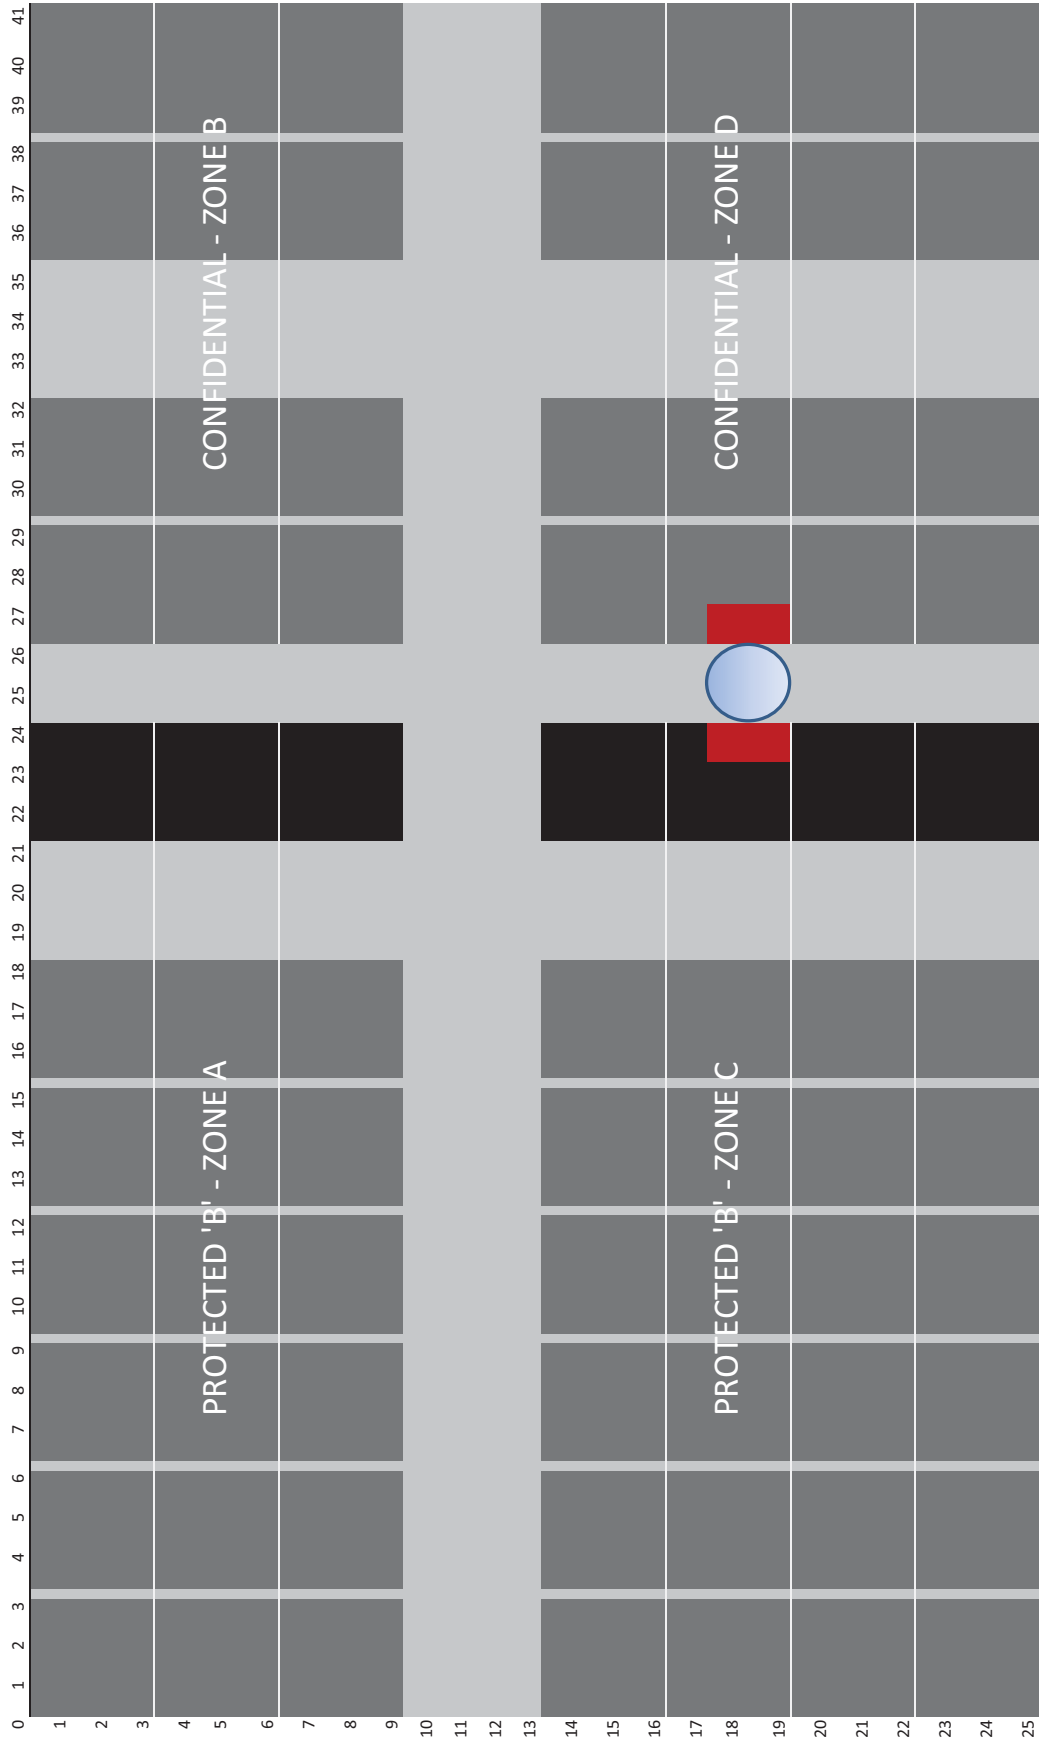

HEIGHT: (maximum 82")