



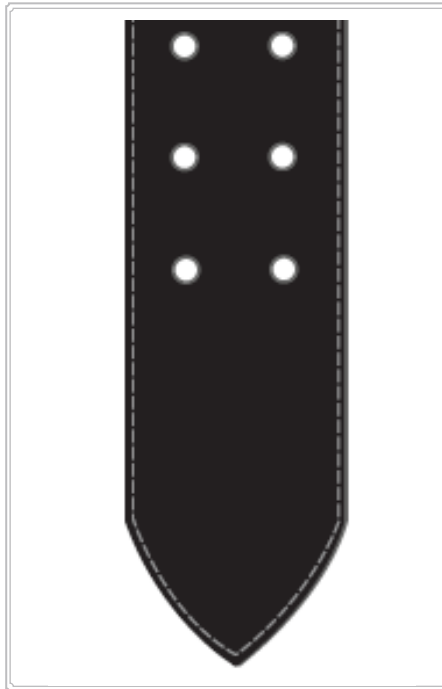

# Cargo Belt, Leather 2"

## Purchase Description

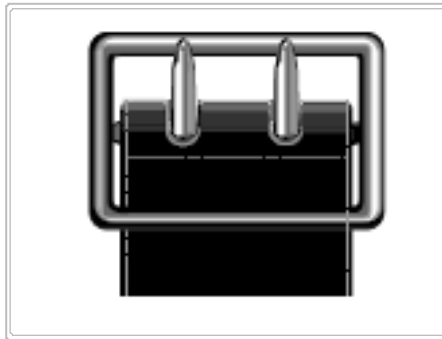

File no. CBSA/ASFC-2012-09-111  
Date of issue: 2013-07-24

**PURCHASE DESCRIPTION**

**CARGO BELT, LEATHER 2"**

**1. SCOPE**

This purchase description describes the requirement for materials, design, construction and inspection of a two (2") inch leather cargo belt trouser for use by Border Service Officers (BSO) within the Canada Border Services Agency (CBSA).

**2. GENERAL REQUIREMENTS**

- 2.1. **DESIGN** - The belt must be produced in genuine leather, with a two (2) prong silver buckle. The belt must be black in colour. The buckle must have a high polished silver finish.
- 2.2. All articles or materials covered by this purchase description shall be free from imperfections or blemishes such as may affect its appearance or serviceability.
- 2.3. In the event of any inconsistency in the contract documents, purchase description, drawings, or sealed samples. The aforementioned shall prevail in the following order:
  - I) Contract
  - II) Purchase Description
  - III) Drawings
  - IV) Sealed Sample

### 3. SEALED SAMPLE

A sealed sample, identified by the purchase description number noted in the contract, will be supplied to the successful tenderer if available. This will constitute the standard in regards to any properties not identified within. Variation from the purchase description may appear in the sample in which case the purchase description shall govern unless otherwise identified on the sealed sample tag.

The sealed sample will be sent "prepaid" and is to be returned "prepaid".

The sealed sample is to be returned to CBSA in the same condition as received by the manufacturer. Lost or damaged sealed samples shall be replaced by an identical item or the CBSA shall be reimbursed for the cost of an acceptable replacement.

### 4. APPLICABLE SPECIFICATIONS

4.1. CAN/CGSB 4.2, Textile Test Methods.

### 5. DETAILED REQUIREMENTS

#### 5.1. MATERIALS

5.1.1. **Leather** - Split grain Genuine Cowhide Leather; 2.8mm - 3 mm thick, 8-9 ounces, black in colour. Equal in all respects to the sealed sample.

5.1.2. **Colourfastness to Rubbing (Crocking)**: The leather shall show no more staining than grey scale 3 for wet and dry crocking when tested with CAN/CGSB-4.2 Method 22-2004.

5.1.3. **Cracking**: The leather shall show no signs of cracking when tested with CAN/CGSB-4.2 Method 16.1 using a mandrel of 11mm in diameter.

5.1.4. **Buckle** - Shall be a two (2) prong type buckle made to fit 5 cm (2") wide belt. It shall be solid zinc with a high polished silver finish equal in all respects to the sealed sample.

5.1.5. **Thread** - Shall be Euro core 16 Tex R120, Polyester/Cotton, black in colour.

## 6. GENERAL CONSTRUCTION

- 6.1. **Size & Dimensions:** The 5cm (2") wide cargo belt shall be available from sizes 24 waist - 60 waists or as specified in the contract documents. The belt lengths shall be the distance from the inside of the buckle (beginning of the leather) to the middle prong hole, with five (5) prong holes evenly spaced 2.5cm (1")  $\pm$  1.5mm apart. All dimensions of the finished belt shall conform to the drawings and sealed sample.

## 7. CONSTRUCTION

- 7.1. **Belt** - The belt produced from material specified in para 5.1.1 shall be made from a single, solid piece of leather 5cm (2") wide with a thickness of 2.8mm to 3mm. The belt shall have a total of ten (10) 4mm (3/16") holes, evenly spaced 2.5cm (1") apart in two rows as shown in the drawings and sealed sample.
- 7.2. **Stitching** - Sewing shall be lock stitch unless otherwise specified. There shall be not less than seven or no more than eight stitches per inch with the beginning and ending securely backstitched. The stitches shall be regular and even, free from skipped stitches or other stitching malfunctions that may result from poor machine tension.
- 7.3. **Finish:** The finish of the belt shall be the same as the sealed sample. The leather shall be free from slaughter cuts, damaged grain, open scratches, open grub holes, and wrinkles. Light well healed-over scratches, grub holes and light wrinkles that do not affect the serviceability or seriously affected the appearance, will be accepted in the finished belt. The grain side of the leather shall be stained black with a stain that will penetrate below the grain surface. After staining, the grain surface shall be sealed with a water resistant, pigmented resin coat of acrylic resolene equal in respects to the viewing sample.
- 7.4. **Edge Finishing:** The edges of the belt shall be stained and filled with a wax type of black edging ink and then burnished to a solid smooth and durable edge, in full conformance with the viewing sample.
- 7.5. **Colour:** The color shall be back in accordance with the sealed sample. The inside of the belt shall have a durable and colour-fast finish and shall not cause any staining to the trouser waist material.

## 8. MARKINGS

The following information shall be stamped permanently on the inside of each belt.

- Size designation
- Material Master Number (as specified in the contract documents)
- Manufacturers' Name and Contract #

## 9. TECHNICAL INSPECTION

The contractor shall be responsible for the performance of all inspections and tests necessary to demonstrate that that materiel and services being supplied conform to the requirements of this purchase description. This may be accomplished by performing the test specified in this purchase description or by demonstrating to the satisfaction of the CBSA, Technical Authority that conformity to the purchase description and manufacturing process is assured. The contractor may use any independent, ISO 9001 certified and ISO 17025 "Textile" certified testing facilities acceptable to the CBSA Technical Authority. Certification documents will be required.

The CBSA Technical Authority reserves the right to perform any inspection considered necessary to ensure the material and services conform to the specified requirements. For the purpose of inspection, a portion of each delivery not exceeding two percent or two out of any number delivered fewer than 100 may be put to tests that could destroy the articles. If found to be inferior or not in accordance with this specification, all articles so destroyed shall be replaced by others of proper quality at the expense of the contractor. The entire delivery may also be rejected if it is found that articles previously rejected due to non-repairable defects are redelivered for inspection.

The contractor will be promptly notified when any articles are not accepted and such articles will be returned at the contractor's risk and expense.

## 10. DELIVERY, PACKING & MARKING OF CONTAINERS

It is the responsibility of the manufacturer to ensure that goods are packaged in a suitable manner to be delivered in an undamaged condition. Any goods received in a damaged condition will be returned to the manufacturer for replacement at his full cost.

Packing and marking of shipping containers shall be as specified in the invitation to tender.

A packing slip shall be enclosed showing the contents of each shipment.

The contractor shall also identify clearly on the outside of each package (box) the following items

- Size
- Material Master Number
- Quantity of each size contained in the box
- Contract Number

