




**SECOND FLOOR REFLECTED CEILING DEMOLITION PLAN**  
 1:100  
 NORTH

**GENERAL NOTES (ALL FLOORS):**  
 A. REFER TO STRUCTURAL, MECHANICAL AND ELECTRICAL DRAWINGS FOR REMOVALS.  
 B. COORDINATE REMOVALS AND REPAIRS WITH MECHANICAL AND ELECTRICAL FOR FIXTURES, DUCTWORK AND SPRINKLERS.  
 C. REMOVE AND REPAIR WALLS, CEILINGS TO ORIGINAL CONDITION AFTER ALL MECHANICAL AND ELECTRICAL WORK.

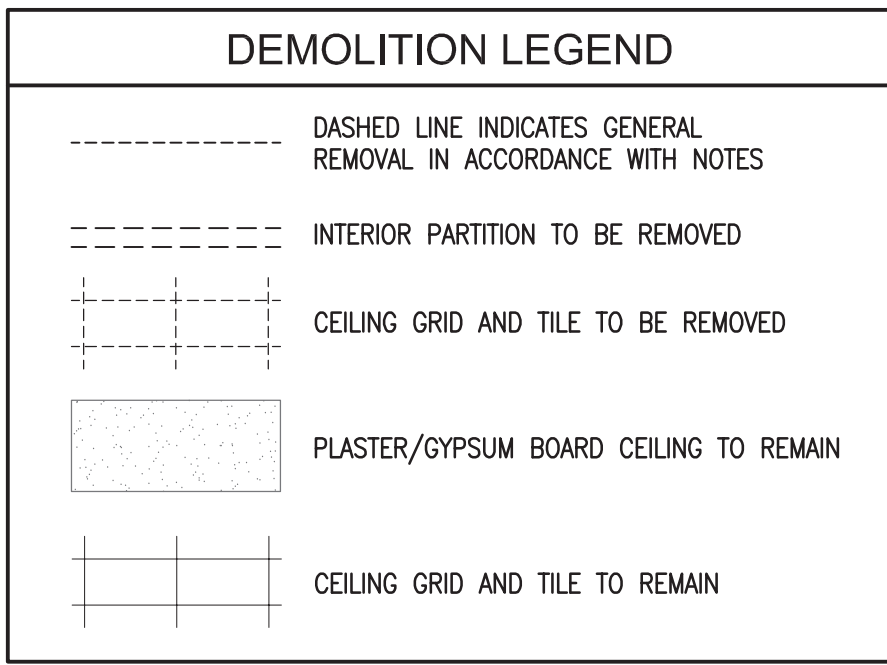

**REFLECTED CEILING DEMOLITION KEY NOTES NOTED THUS ☐**  
**FLOORS 1 & 2**

1. REMOVE BULKHEADS (GYPSUM BOARD AND FRAMING) REMOVE AND REPLACE ACOUSTICAL CEILING TILE AND GRID AS REQUIRED.
2. TEMPORARILY REMOVE LIGHTS FROM BULKHEADS. REINSTALL TO NEW BULKHEADS.
3. REMOVE AND REINSTALL ELECTRICAL DEVICES ALONG THIS CORRIDOR TO ALLOW FOR THE INSTALLATION OF NEW SPRINKLER PIPING.
4. REPAIR DAMAGE AT WALL WHERE BULKHEAD/CEILING IS REMOVED.
5. PIPE INSULATION CONTAINS ASBESTOS MATERIAL.
6. PIPE INSULATION ON ELBOWS CONTAINS ASBESTOS MATERIAL.
7. DRYWALL MUD CONTAINS ASBESTOS MATERIAL.
8. REMOVE GLUED-ON ACOUSTIC TILE IN THIS ROOM - NOTE: ASBESTOS MATERIAL IN CEILING TILES.

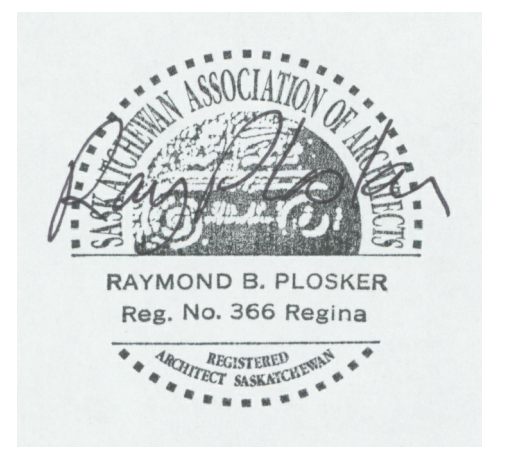

**DO NOT SCALE DRAWINGS**

Revision/	Description/Description	Date/Date
0	ISSUED FOR TENDER	2014-01-17

Project title/Titre du projet  
**SHARED LEARNING FACILITY  
 REGINA, SK**

Approved by/Approve par  
 Designed by/Concept par  
 RP  
 Drawn by/Dessine par  
 RP/CS  
 Project Manager/Administrateur de Projets  
 AC  
 Architectural and Engineering Resources Manager/  
 Ressources Architectural et de Directeur d'ingénierie

Drawing title/Titre du dessin  
**SECOND FLOOR REFLECTED CEILING  
 DEMOLITION PLAN**