


FOURTH FLOOR REFLECTED CEILING DEMOLITION PLAN
 1 A2.8 1:100
 NORTH



- REFLECTED CEILING DEMOLITION KEY NOTES** NOTED THUS ☞
FLOORS 3 & 4
1. REMOVE SUSPENDED CEILING TILE AND GRID IN ITS ENTIRETY ON 3RD AND 4TH FLOORS.
 2. REMOVE BULKHEADS (PLASTER CARRYING CHANNELS AND FURRING BARS AND FURRING) TYPICAL ON 3RD AND 4TH FLOORS.
 3. PLASTER FINISH ON BEAMS TO REMAIN (TYPICAL).
 4. REMOVE SUSPENDED PLASTER CEILING c/w CARRYING CHANNELS AND FURRING BARS.
 5. REMOVE GLUED-ON ACOUSTIC TILE IN THIS ROOM - NOTE: ASBESTOS MATERIAL IN CEILING TILES.
 6. REMOVE ASBESTOS PIPE INSULATION FROM HEATING PIPES CONCEALED WITHIN BULKHEAD.
 7. REMOVE DROPPED CEILING c/w CERAMIC TILE FINISH.
 8. REMOVE DUCTWORK-REFER TO MECHANICAL.
 9. DRYWALL MUD CONTAINS ASBESTOS MATERIAL.

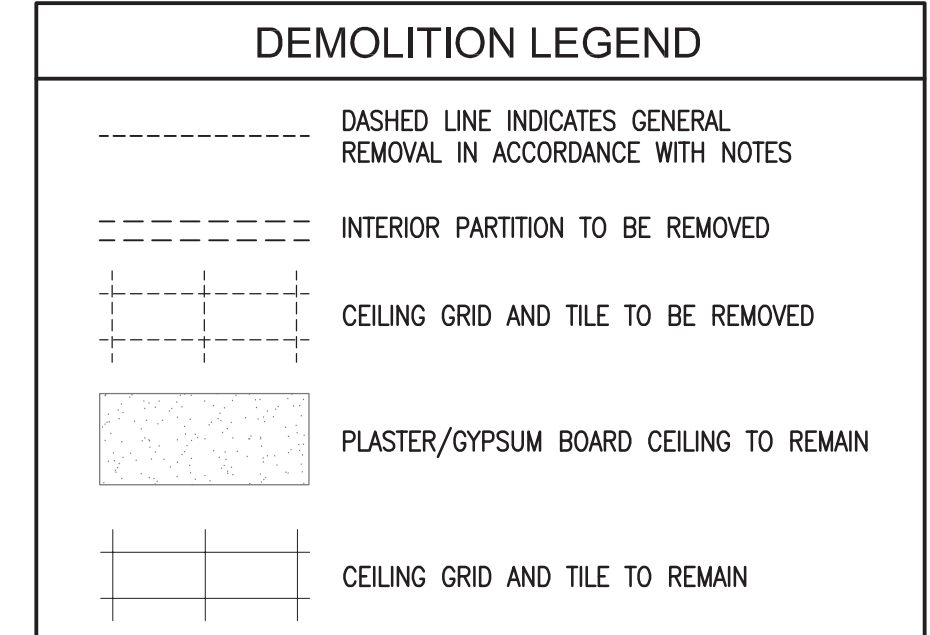

- GENERAL NOTES (ALL FLOORS):**
- A. REFER TO STRUCTURAL, MECHANICAL AND ELECTRICAL DRAWINGS FOR REMOVALS.
 - B. COORDINATE REMOVALS AND REPAIRS WITH MECHANICAL AND ELECTRICAL FOR FIXTURES, DUCTWORK AND SPRINKLERS.
 - C. REMOVE AND REPAIR WALLS, CEILINGS TO ORIGINAL CONDITION AFTER ALL MECHANICAL AND ELECTRICAL WORK.

NOTE: KNOWN HAZARDOUS MATERIAL ON HEATING PIPE ELBOWS WITHIN BULKHEADS

NOTE: KNOWN HAZARDOUS MATERIAL ON HEATING PIPE ELBOWS WITHIN BULKHEADS

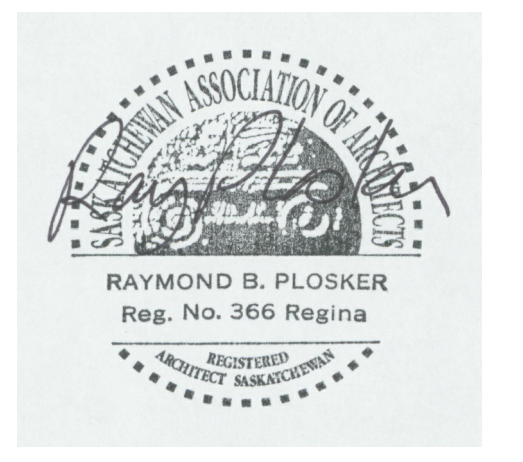

DO NOT SCALE DRAWINGS

Revision/	Description/Description	Date/Date
0	ISSUED FOR TENDER	2014-01-17

Project title/Titre du projet
SHARED LEARNING FACILITY
 REGINA, SK

Approved by/Approve par
 Designed by/Concept par
 RP
 Drawn by/Dessine par
 RP/CS
 Project Manager/Administrateur de Projets
 AC
 Architectural and Engineering Resources Manager/
 Ressources Architectural et de Directeur d'Ingénierie

Client/client
 Drawing title/Titre du dessin
FOURTH FLOOR REFLECTED CEILING DEMOLITION PLAN