
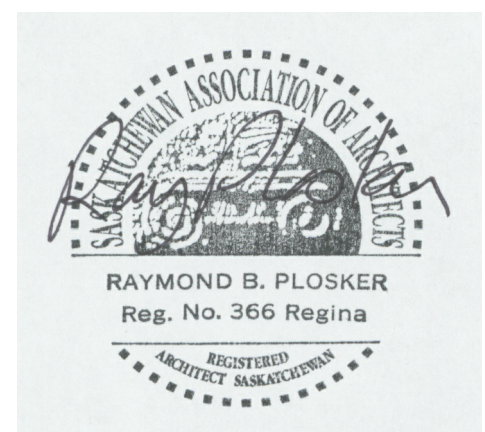


**1 THIRD FLOOR REFLECTED CEILING DEMOLITION PLAN**  
A2.7 1:100

- REFLECTED CEILING DEMOLITION KEY NOTES** NOTED THUS ☞  
**FLOORS 3 & 4**
1. REMOVE SUSPENDED CEILING TILE AND GRID IN ITS ENTIRETY ON 3RD AND 4TH FLOORS.
  2. REMOVE BULKHEADS (PLASTER CARRYING CHANNELS AND FURRING BARS AND FURRING) TYPICAL ON 3RD AND 4TH FLOORS.
  3. PLASTER FINISH ON BEAMS TO REMAIN (TYPICAL).
  4. REMOVE SUSPENDED PLASTER CEILING w/ CARRYING CHANNELS AND FURRING BARS.
  5. REMOVE GLUED-ON ACOUSTIC TILE IN THIS ROOM - NOTE: ASBESTOS MATERIAL IN CEILING TILES.
  6. REMOVE ASBESTOS PIPE INSULATION FROM HEATING PIPES CONCEALED WITHIN BULKHEAD.
  7. REMOVE DROPPED CEILING w/ CERAMIC TILE FINISH.
  8. REMOVE DUCTWORK-REFER TO MECHANICAL.
  9. DRYWALL MUD CONTAINS ASBESTOS MATERIAL.

NOTE: WHERE PLASTER CEILINGS ARE REMOVED AS PER KEYNOTES #2 & #4 ON THIS DRAWING, PROVIDE NEW 16 TYPE X GYPSUM BOARD ON CARRYING CHANNELS & FURRING BARS AT THE UNDERSIDE OF EXISTING OPEN WEB STEEL JOISTS. (TYPICAL). SHOWN SHADED.

- GENERAL NOTES (ALL FLOORS):**
- A. REFER TO STRUCTURAL, MECHANICAL AND ELECTRICAL DRAWINGS FOR REMOVALS.
  - B. COORDINATE REMOVALS AND REPAIRS WITH MECHANICAL AND ELECTRICAL FOR FIXTURES, DUCTWORK AND SPRINKLERS.
  - C. REMOVE AND REPAIR WALLS, CEILINGS TO ORIGINAL CONDITION AFTER ALL MECHANICAL AND ELECTRICAL WORK.

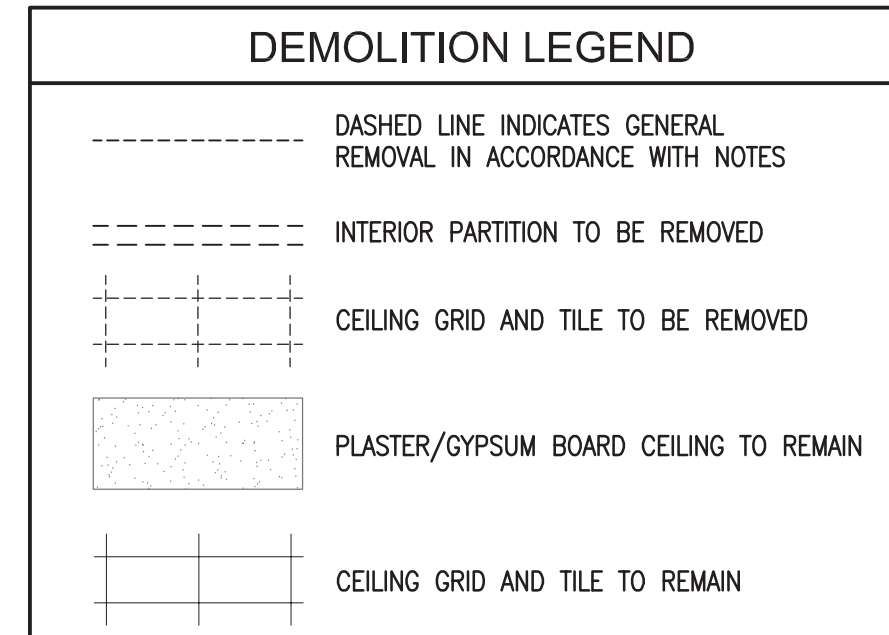

**DO NOT SCALE DRAWINGS**

Revision/	Description/Description	Date/Date
0	ISSUED FOR TENDER	2014-01-17

Project title/Titre du projet  
**SHARED LEARNING FACILITY**  
REGINA, SK

Approved by/Approve par  
RP  
 Designed by/Concept par  
RP/CS  
 Drawn by/Dessine par  
AC  
 Project Manager/Administrateur de Projets  
AC  
 Architectural and Engineering Resources Manager/  
Ressources Architectural et de Directeur d'Ingénierie

Drawing title/Titre du dessin  
**THIRD FLOOR REFLECTED CEILING**  
**DEMOLITION PLAN**