

NOTE: MECHANICAL HEATING RISERS HAVE BEEN FURRED IN THE PAST. PIPE ELBOWS MAY HAVE ASBESTOS INSULATION. DO NOT DISTURB PIPING WITHIN FURRING CONCEALED WITH BULKHEADS.

FIRST FLOOR REFLECTED CEILING DEMOLITION PLAN
 1 A2.5 1:100



GENERAL NOTES (ALL FLOORS):
 A. REFER TO STRUCTURAL, MECHANICAL AND ELECTRICAL DRAWINGS FOR REMOVALS.
 B. COORDINATE REMOVALS AND REPAIRS WITH MECHANICAL AND ELECTRICAL FOR FIXTURES, DUCTWORK AND SPRINKLERS.
 C. REMOVE AND REPAIR WALLS, CEILING TO ORIGINAL CONDITION AFTER ALL MECHANICAL AND ELECTRICAL WORK.

DEMOLITION LEGEND

	DASHED LINE INDICATES GENERAL REMOVAL IN ACCORDANCE WITH NOTES
	INTERIOR PARTITION TO BE REMOVED
	CEILING GRID AND TILE TO BE REMOVED
	PLASTER/GYPSUM BOARD CEILING TO REMAIN
	CEILING GRID AND TILE TO REMAIN

REFLECTED CEILING DEMOLITION KEY NOTES NOTED THUS

1. REMOVE BULKHEADS (GYPSUM BOARD AND FRAMING) REMOVE AND REPLACE ACOUSTICAL CEILING TILE AND GRID AS REQUIRED.
2. TEMPORARILY REMOVE LIGHTS FROM BULKHEADS. REINSTALL TO NEW BULKHEADS.
3. REMOVE AND REINSTALL ELECTRICAL DEVICES ALONG THIS CORRIDOR TO ALLOW FOR THE INSTALLATION OF NEW SPRINKLER PIPING.
4. REPAIR DAMAGE AT WALL WHERE BULKHEAD/CEILING IS REMOVED.
5. PIPE INSULATION CONTAINS ASBESTOS MATERIAL.
6. PIPE INSULATION ON ELBOWS CONTAINS ASBESTOS MATERIAL.
7. DRYWALL MUD CONTAINS ASBESTOS MATERIAL.
8. REMOVE GLUED-ON ACOUSTIC TILE IN THIS ROOM - NOTE: ASBESTOS MATERIAL IN CEILING TILES.

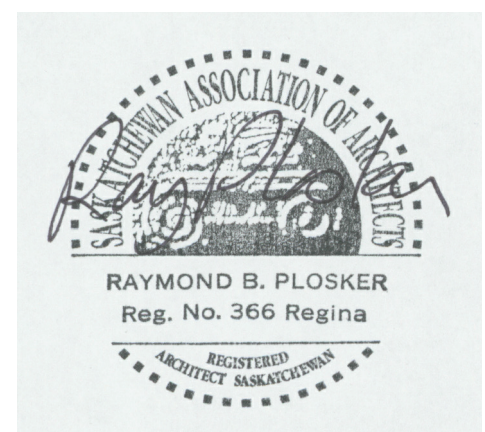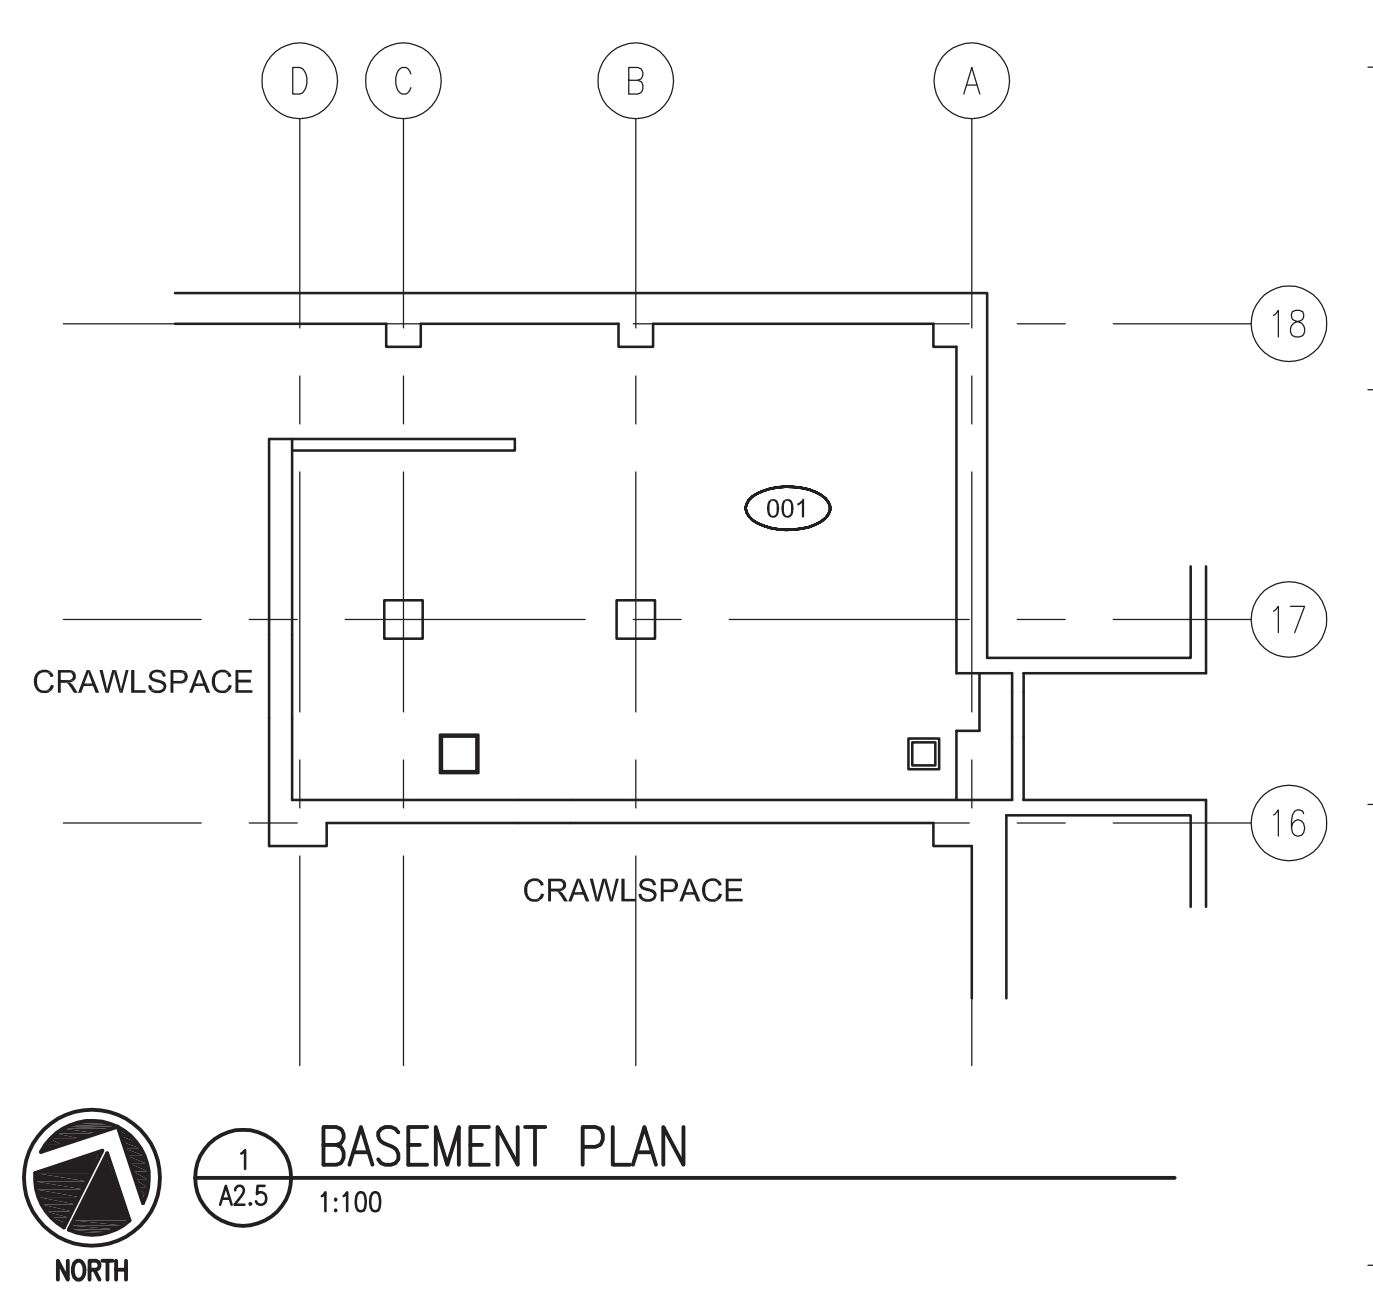

DO NOT SCALE DRAWINGS

Revision/Revision	Description/Description	Date/Date
0	ISSUED FOR TENDER	2014-01-17

Project title/Titre du projet
SHARED LEARNING FACILITY
 REGINA, SK

Approved by/Approve par
 Designed by/Concept par
 RP
 Drawn by/Dessine par
 RP/CS
 Project Manager/Administrateur de Projets
 AC
 Architectural and Engineering Resources Manager/
 Ressources Architectural et de Directeur d'Ingénierie

Drawing title/Titre du dessin
FIRST FLOOR REFLECTED CEILING DEMOLITION PLAN

