


Project Location

Mountain Institution

Unit K
Kitchen/Dining

Partial Floor Plan

Scale: NIL

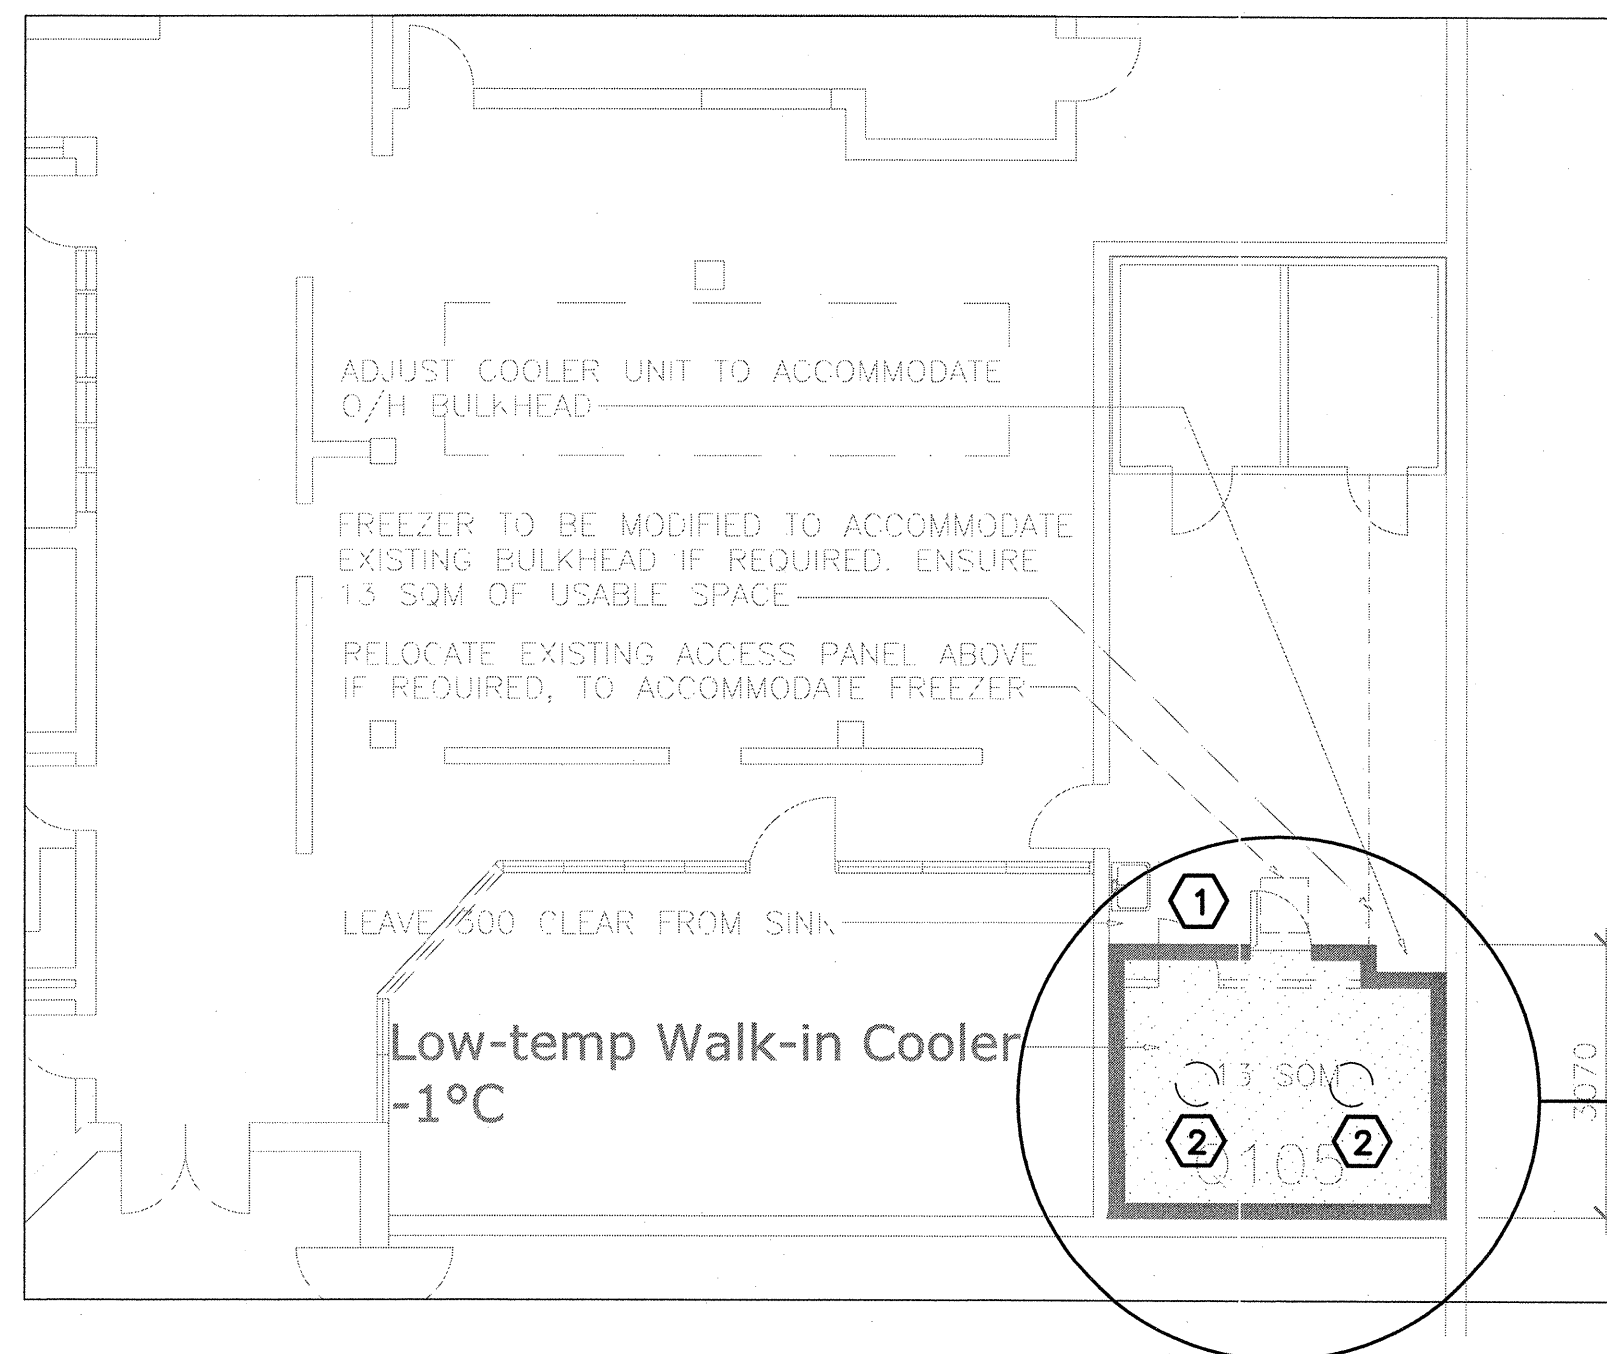



Project Location

Kent Institution

Unit Q
Kitchen/Staff Dining

Partial Floor Plan

Scale: NIL

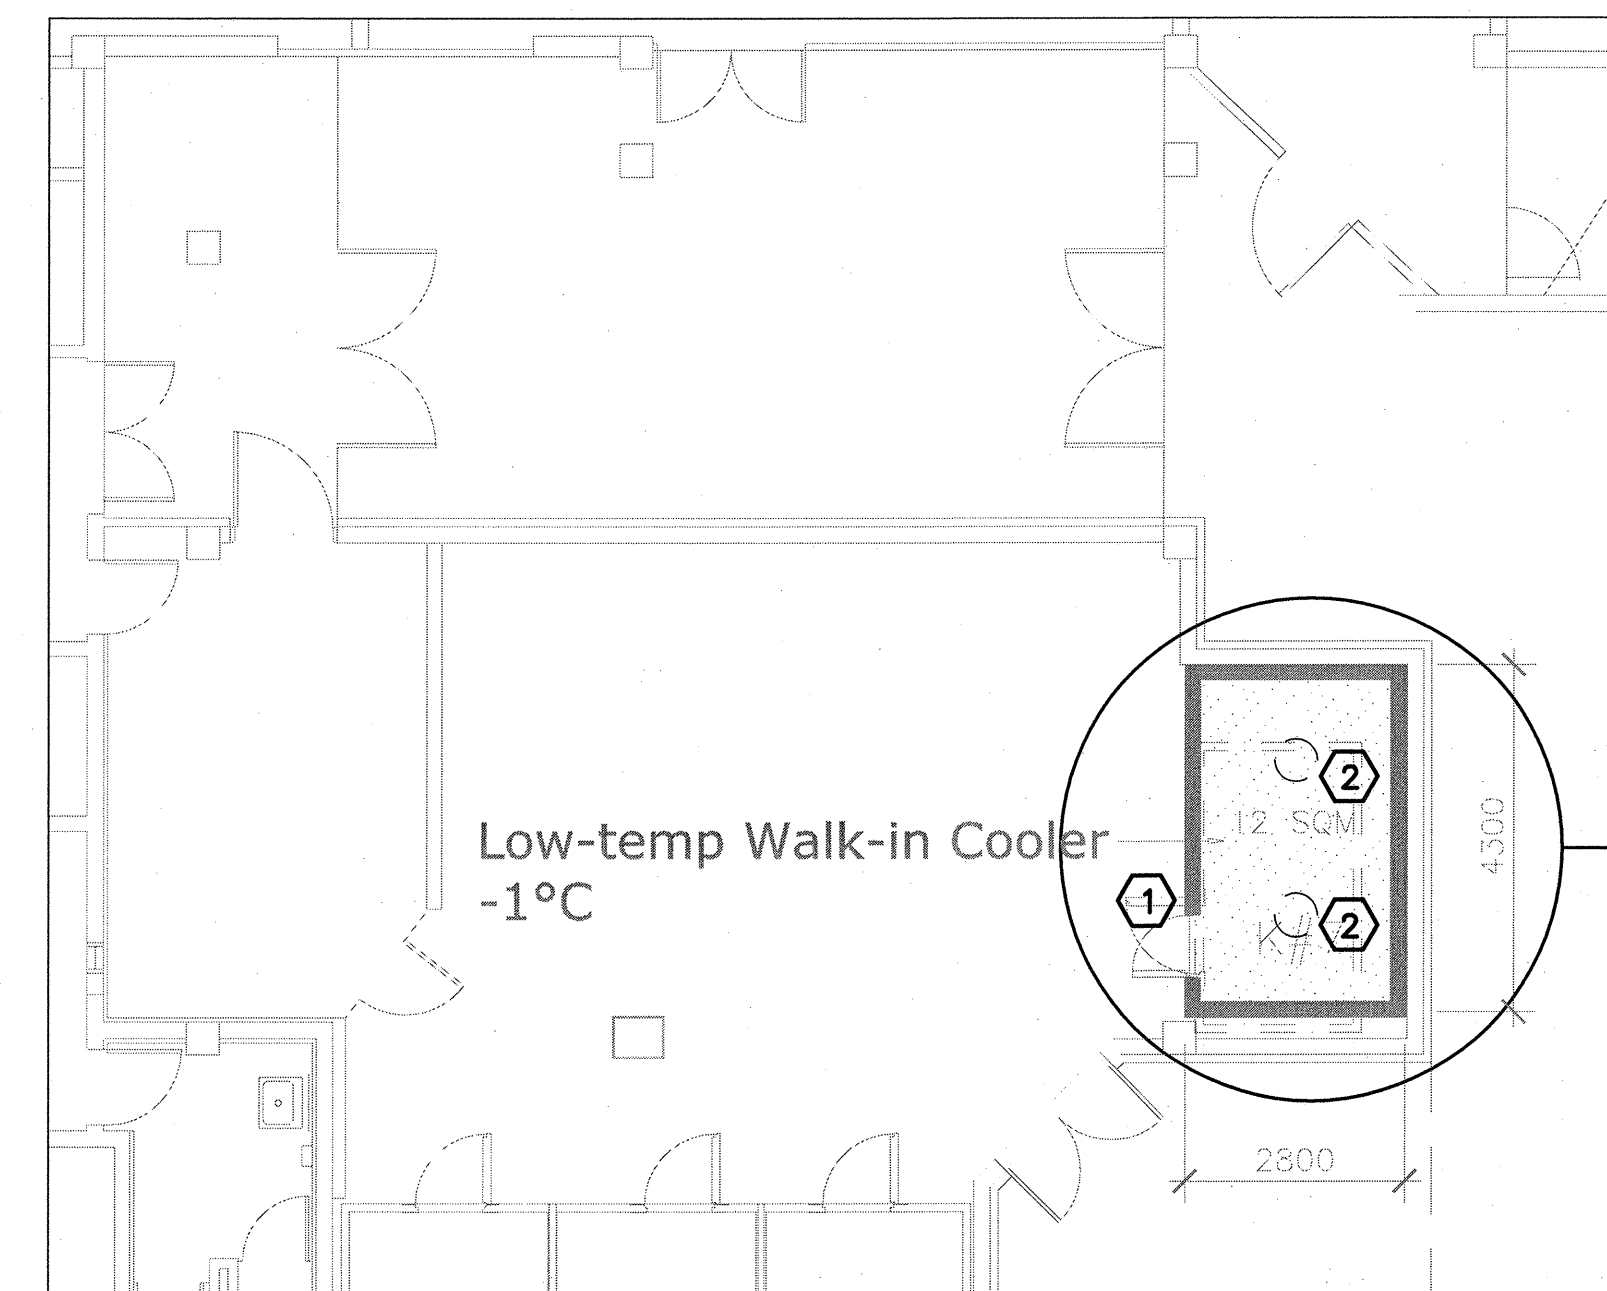

Project Location

Mission Institution

Unit AK
Administration/Kitchen

Partial Floor Plan

Scale: NIL

LEGEND

○ EXISTING DRY PENDENT SPRINKLER HEAD

GENERAL NOTE:

1. CONTRACTOR IS RESPONSIBLE FOR VERIFYING THE EXACT LOCATION, DIMENSION AND ELEVATION OF EXISTING PLUMBING, DRAINAGE AND FIRE PROTECTION SERVICES PRIOR TO CONSTRUCTION. NOTIFY THE DEPARTMENTAL REPRESENTATIVE OF ANY DISCREPANCIES.
2. REFER TO EQUIPMENT LOAD IN APPENDIX 5 OF THE SPECIFICATIONS FOR SERVICE CONNECTIONS REQUIREMENTS OF ALL NEW COOLERS.

SPECIFIC NOTES:

1. DISCONNECT AND REMOVE EXISTING DRAIN LINE FROM EXISTING EVAPORATOR. INSTALL NEW DRAIN LINE FROM NEW EVAPORATOR C/W HEAT TRACE, INSULATION AND STAINLESS STEEL JACKET TO THE NEAREST EXISTING FUNNEL FLOOR DRAIN. INSTALL A RUNNING TRAP OUTSIDE THE COOLER.
2. REMOVE AND RE-INSTALL EXISTING DRY SPRINKLER HEAD FOR THE NEW WALK-IN COOLER. MODIFY EXISTING SPRINKLER PIPES IF REQUIRED TO SUIT IN ACCORDANCE TO NFPA 13.

Public Works and
Government Services
Canada

Travaux publics et
Services gouvernementaux
Canada

REAL PROPERTY SERVICES
Pacific Region
SERVICES IMMOBILIERS
Région de Pacifique

Feb 9.5.2014

2	ISSUED FOR TENDER	2014/02/24
1	ISSUED FOR REVIEW	2014/02/17
Revision/ Révision	Description/Description	Date/Date
Client/client		

Correction Service Canada
Various Institutions

Project title/Titre du projet

Agassiz BC
Mountain Institution
Kent Institution

Mission BC
Mission Institution

Finishing Kitchen

Consultant Signature Only

Designed by/Concept par
V. Wong

Drawn by/Dessiné par
V. Wong February 2014

PWOSC Project Manager/Administrateur de Projets TPSCC
S. Leslie

Regional Manager, Architectural and Engineering Services
Gestionnaire régionale, Services d'architecture et de génie, TPSCC
P. Fung

Drawing title/Titre du dessin

Mountain Institution Unit K Kitchen/Dining
Kent Institution Unit Q Kitchen/Staff Dining
Mission Institution Unit AK Administration/
Kitchen

Partial Floor Plans

Project No./No. du projet	Sheet/Feuille	Revision no./ La Révision no.
R.067189.001	M1	

