

RETURN BIDS TO:
RETOURNER LES SOUMISSIONS À:
Bid Receiving - PWGSC / Réception des soumissions
- TPSGC
11 Laurier St./11 rue Laurier
Place du Portage, Phase III
Core 0A1 / Noyau 0A1
Gatineau, Québec K1A 0S5

SOLICITATION AMENDMENT
MODIFICATION DE L'INVITATION

The referenced document is hereby revised; unless otherwise indicated, all other terms and conditions of the Solicitation remain the same.

Ce document est par la présente révisé; sauf indication contraire, les modalités de l'invitation demeurent les mêmes.

Comments - Commentaires
This requirement contains a Security Requirement.

Vendor/Firm Name and Address
Raison sociale et adresse du
fournisseur/de l'entrepreneur

Issuing Office - Bureau de distribution
Construction Services Division/Division des services de
construction
11 Laurier St./11 Rue Laurier
3C2, Place du Portage
Phase III
Gatineau, Québec K1A 0S5

Title - Sujet VENTILATION TOWERS REHABILITATION		
Solicitation No. - N° de l'invitation EP748-141813/A		Amendment No. - N° modif. 004
Client Reference No. - N° de référence du client 20141813		Date 2014-03-27
GETS Reference No. - N° de référence de SEAG PW-\$\$\$FG-356-64724		
File No. - N° de dossier fg356.EP748-141813	CCC No./N° CCC - FMS No./N° VME	
Solicitation Closes - L'invitation prend fin at - à 02:00 PM on - le 2014-04-08		Time Zone Fuseau horaire Eastern Daylight Saving Time EDT
F.O.B. - F.A.B. Plant-Usine: <input type="checkbox"/> Destination: <input checked="" type="checkbox"/> Other-Autre: <input type="checkbox"/>		
Address Enquiries to: - Adresser toutes questions à: Lagacé, Hélène		Buyer Id - Id de l'acheteur fg356
Telephone No. - N° de téléphone (819) 956-0060 ()		FAX No. - N° de FAX (819) 956-8335
Destination - of Goods, Services, and Construction: Destination - des biens, services et construction:		

Instructions: See Herein
Instructions: Voir aux présentes

Delivery Required - Livraison exigée	Delivery Offered - Livraison proposée
Vendor/Firm Name and Address Raison sociale et adresse du fournisseur/de l'entrepreneur	
Telephone No. - N° de téléphone Facsimile No. - N° de télécopieur	
Name and title of person authorized to sign on behalf of Vendor/Firm (type or print) Nom et titre de la personne autorisée à signer au nom du fournisseur/ de l'entrepreneur (taper ou écrire en caractères d'imprimerie)	
Signature	Date

Solicitation No. - N° de l'invitation

EP748-141813/A

Amd. No. - N° de la modif.

004

Buyer ID - Id de l'acheteur

fg356

Client Ref. No. - N° de réf. du client

20141813

File No. - N° du dossier

fg356EP748-141813

CCC No./N° CCC - FMS No/ N° VME

This amendment is raised to issue Addendum # 2 .

All other terms and conditions remain unchanged.

The following changes in the bid documents are effective immediately. This addendum will form part of the contract documents.

DRAWINGS

Drawing A101

- 1 Refer to sketch SK-1 for modifications to extent of Senate side construction yard perimeter fence.

Drawing E1 – Drawing Notes

- 1 Refer to sketch SKE-E1 for modifications to the drawing notes.

Drawing E2 – Detail 2 ‘Single Line Diagram Temporary Distribution’

- 1 Refer to sketch SKE-E2 for modifications to the single line diagram.

SPECIFICATIONS

Section 01 00 10

- 1 **DELETE:** 14 Security Requirements
- 2 **REPLACE with:** 14 Security Requirements
 - .1 Personnel Screening Process
 - .1 All personnel employed on this project will be subject to a security check.
 - .2 Designate a Security Clearance liason person to manage the application processing of all personnel employed on the project and be the principal contact with the Departmental Representative in this regard. Submit name of liason person within 5 business days after contract award.
 - .3 Submit within 5 business days after contract award, a list of all personnel that requires access to the site. The list shall contain full names, firms they represent and date of birth.
 - .4 The Departmental Representative will advise the Contractor within 3 business days of the personnel who have security clearance.
 - .5 If applicant does not have security clearance, the applicant must complete and submit the following security forms (available at: <http://ssi-iss.tpsgcpgwgc.gc.ca/ssi-iss/personnel/enqutscrngeng.html>):
 - .1 TBS-330-23 E Personnel Screening Consent and Authorization form.
 - .2 TBS-330-60 E Security Clearance form.
 - .6 Forms are to be filled out and delivered to the Departmental Representative.
 - .7 The review period can vary depending on the individual. Allow for a minimum 30-business day review period for all properly submitted forms. Within this period each applicant will be informed of their security status and ability to access and work on the site.

-
- .8 In the case that the required security level is not granted for specific individuals, proceed as follows:
 - .1 Submit forms for replacement personnel, as indicated or,
 - .2 Re-apply: Re-submit forms with any clarifications requested by the review process. Additional information may include provision for fingerprinting of the applicant to confirm the identity of the applicant. This process may require an additional review period of 30-90 business days.
 - .3 Ensure that replacement personnel are available for the scheduled start of work.
 - .9 Obtain a contractor's security pass (photographic identity card), valid for the duration of the project from each individual from PWGSC Security office located at 185 Sparks Street, 1st Floor, Ottawa, ON.
 - .10 Access to Building & Construction Site:
 - .1 It is the responsibility of the General Contractor/worker to submit requests for clearance and location of work.
 - .2 It is the General Contractor's responsibility to track cleared personnel and personnel in process of gaining clearance. The level of requested clearance should also be described.
 - .3 A request must be made to access the occupied spaces 10 business days prior to the site visit. Only those who have the security clearance required can access those spaces.
 - .4 Submit the names of all personnel, dates of birth, who they represent, date, duration and purpose of the visit. For deliveries and waste removal, submit names of drivers, vehicle/truck make, model, colour, plate number of all vehicles/trucks entering the grounds to access the site.
 - .5 All personnel employed on this project will be subject to a security clearing process. Obtain clearance level stated in the Contract or higher for each individual required to enter premises. It is the Contractor's responsibility to ensure all personnel on site obtain timely security clearance before arriving on site. Provide the Departmental Representative with a list of all employees complete with Names, Date of Birth and Company name for verification prior to entering site. Late or failure in obtaining the required security clearance by any personnel will have direct impact to the schedule and cost of the Contractor which will not be reimbursable from PWGSC.
 - .6 The Departmental Representative will issue Authorization for Building Access (ABA) forms no sooner than 48 hours after receipts of names and dates of birth for individuals requiring access to site. Individuals will not be allowed to work on site without this form.
 - .7 Personnel will be checked daily at start of work shift and provided with pass which must be worn at all times. Pass must be returned at end of work shift and personnel checked out.
 - .8 All vehicles requiring access to the site will be subject to a security clearing process. Provide Departmental Representative with list of

- vehicles requiring access. Include with the list: vehicle make, model, colour, and license plate number.
- .9 The Departmental Representative will issue Authorization for Vehicular Access (AVA) forms no sooner than 48 hours after receipt of vehicular information. Vehicles will not be allowed to access the site without this form.
- .10 Interior and exterior Site Security
 - .1 Provide and pay for responsible security guard 24 hours/day and 7 days per week (separate from the security guard for control access during construction hours – see Section 01 52 00) for site security. Primary tasks of this individual will be as follows:
 - .1 Site security rounds (interior and exterior) should be complete once every hour 24 hrs a day and 7 days per week.
 - .2 Perform hourly fire watches of all the exterior and interior hoarding.
 - .3 Create and maintain a daily log of all incidents that occur on the site, and make available to the Departmental Representative upon request.
 - .2 For access to occupied building areas, which are not part of construction, the Departmental Representative requires 48 hour notice to the Departmental Representative to arrange for an escort.
 - .3 A minimum of 10 days notice must be given to Departmental Representative for interventions to existing access control, fire protection, electrical services, sprinkler, HVAC systems, etc. Note: Work requiring a hot work permit also requires 10 days notice.
- .11 Cables and equipments
 - .1 General Contractor to ensure that all cabling installations and conduit be properly labeled as per the Senate security naming nomenclature standards.
 - .2 General Contractor to ensure all pull strings must be installed in all conduits, zone or door box infrastructure for future use.
 - .3 General Contractor to ensure all obsolete cables be removed and discarded. Confirmation will be provided by the Departmental Representative.

Section 01 14 00 Work Restrictions

- 1 **ADD** Article 1.2.3 as follows: "With the exception of the construction and removal of interior hoarding, access to the interiors of the towers is only permitted through the exterior scaffoldings and window/louvre openings, throughout all stages of construction."


Section 01 14 10 Suggested Sequence of Work

- 1 **DELETE:** 1.1.3.3
- 2 **REPLACE with:** 1.1.3.3 "Erect exterior scaffolding to provide emergency access from entire tower including to the basement level."

Section 01 52 00 Construction Facilities

- 1 **DELETE:** 1.4.2
- 2 **REPLACE with:** 1.4.2 "Provide and maintain scaffolding, ramps, ladders, platforms and temporary stairs. Provide 80% open weave safety netting. Colour: green. No more than one level of scaffolding can be fully enclosed with sheeting at any given time due to wind load restrictions. Provide a roof to shed water."
- 3 **DELETE** 1.4.5: "Provide two means of egress at all levels."
- 4 **ADD** 1.4.12 as follows: "For secondary scaffolding set on existing flat roof areas, such as required to install or remove main scaffold or implement final repairs to masonry, provide spreader beams and pads to maintain a maximum bearing pressure of 3.6 kPa."
- 5 **DELETE:** 1.8.1
- 6 **REPLACE with:** 1.8.1 "During construction hours, provide and pay for one (1) security guard to guard access to the House of Commons Tower construction site AND one (1) security guard to guard access to the Senate Tower construction site. These two access control guards are separate from the guard requested for site security services in section 01 00 10. All security personnel must be licensed under the Ontario Private Security and Investigative Services Act, 2005 and be eligible for Federal security clearance as in Section 01 00 10."

END OF ADDENDUM

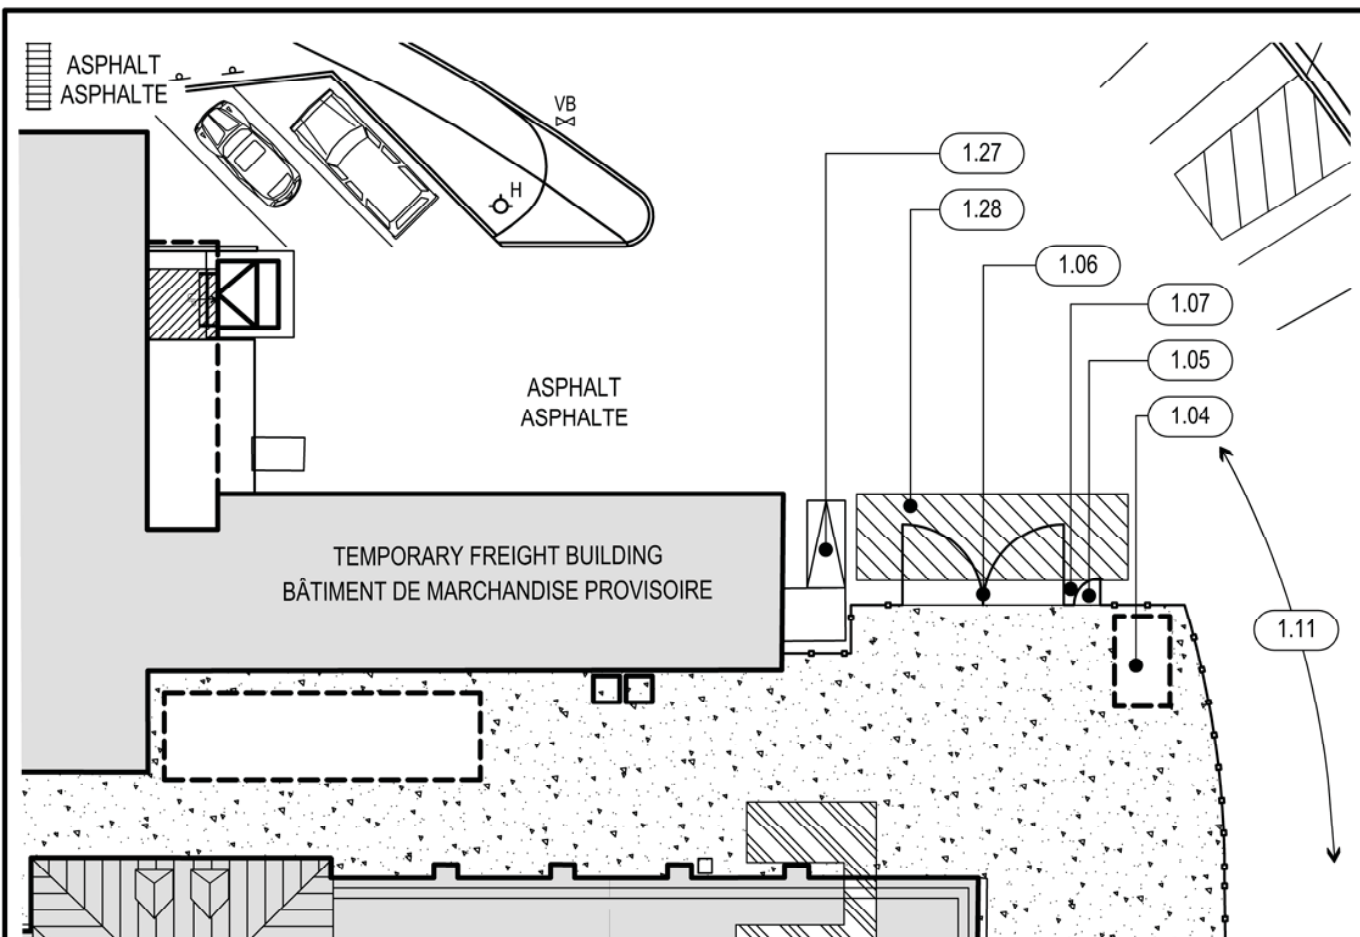

PROPOSED WORKSITE - SENATE (REVISED)
CHANTIER PROPOSÉ - SÉNAT (MODIFIÉ)

KEYNOTES

NOTES PRINCIPALES

- 1.04 SECURITY OFFICE WITH ELECTRICITY & PHONE /
POSTE DE SÉCURITÉ AVEC ÉLECTRICITÉ ET PRISE
DE TÉLÉPHONE
- 1.05 WORK SITE ACCESS FOR WORKERS /
ACCÈS AU SITE POUR OUVRIERS
- 1.06 WORK SITE ACCESS FOR DELIVERIES /
ACCÈS AU SITE POUR LIVRAISON
- 1.07 ACCESS CARD READER /
LECTEUR DE CARTES D'ENTRÉE
- 1.11 VEHICULAR CIRCULATION /
CIRCULATION DE VÉHICULES
- 1.27 EXISTING ACCESS RAMP /
RAMPE D'ACCÈS EXISTANT
- 1.28 RESERVED TRUCK LOADING ZONE /
ZONE RÉSERVÉE AU CHARGEMENT DE CAMION



Watson MacEwen Teramura
Architects
400 - 116 Lisgar Street
Ottawa ON K2P 0C2
t 613.232.0330

CENTRE BLOCK VENTILATION TOWERS
project REHABILITATION PROJECT project
REMISE EN ÉTAT DES TOURS DE
VENTILATION DE L'ÉDIFICE DU CENTRE

drawn GF dessiné
date 2014/03/19
scale 1:250 échelle

project no. no. du projet
R.008227.002

SK-1



Ottawa :
100-1960 Robertson Road, Suite 100, K2H 5B9
T.(613) 596.6454 F.(613) 596.3346
www.WBBPengineering.com

Gatineau :
430 de l'hôpital bld, suite 210, J8V 1T7
T.(819) 778.2448 F.(819) 778.5031

Consulting Engineers

ADDENDUM NO. E02
ADDENDA NO. E02

NOTES

- 1 PROVIDE TEMPORARY POWER CONNECTION TO CONSTRUCTION TRAILER FROM PANEL C-EAST LOCATED IN THE SENATE TOWER EAST DISTRIBUTION KIOSK.
FOURNIR UN RACCORDEMENT TEMPORAIRE POUR LE REMORQUE DE CONSTRUCTION DU PANNEAU C-EAST. LE PANNEAU EST SITUÉ DANS LE CENTRE DE DISTRIBUTION EST SUR LE TOIT.
- 2 PROVIDE TEMPORARY POWER CONNECTION TO CONSTRUCTION TRAILER FROM PANEL C-WEST LOCATED IN THE HOUSE OF COMMONS TOWER WEST DISTRIBUTION KIOSK.
FOURNIR UN RACCORDEMENT TEMPORAIRE POUR LE REMORQUE DE CONSTRUCTION DU PANNEAU C-WEST. LE PANNEAU EST SITUÉ DANS LE CENTRE DE DISTRIBUTION OUEST SUR LE TOIT.
- 3 PROVIDE 15A, 120V, SINGLE PHASE BRANCH CIRCUIT (2 #10 + GRND - 19mm PVC CONDUIT) FROM LOCAL CONSTRUCTION TRAILER TO CONSTRUCTION SITE ENTRANCE GUARD BOOTH. PROVIDE 25mm PVC CONDUIT + COMMUNICATIONS CABLING (FOUR CAT 5E CABLES). CONTRACTOR TO ARRANGE AND PAY ALL COSTS FOR COMMUNAL CONNECTIONS.
FOURNIR UN CIRCUIT DE 15A, 120V, PHASE SIMPLE (2 #10 + M.A.L.T DANS UN CONDUIT CPV DE 19mm) DES REMORQUES DE CONSTRUCTION JUSQU'AUX POSTE DE GARDE. FOURNIR UN CONDUIT CPV DE 25mm ET FOURNIR LES CÂBLES DE COMMUNICATION (QUATRE CÂBLES DE TYPE CAT 5). L'ENTREPRENEUR À ARRANGÉ ET PAYÉ POUR LES RACCORDEMENTS.
- 4 RELOCATED TRASH COMPACTOR - DISCONNECT AT EXISTING LOCATION. EXTEND EXISTING BRANCH WIRING AND MAKE GOOD.
DÉBRANCHER LE CIRCUIT POUR LE COMPACTEUR DE DÉCHETS. ÉTENDRE LE CIRCUIT EXISTANT POUR RACCORDER À LA NOUVELLE EMPLACEMENT.

PROJECT
PROJECT NO. R.008227.002 ☐
PROJET NO. R.008227.002 ☐

DRAWING TITLE
DRAWING E1 NOTES
NOTES DESSIN E1

BPA PROJECT #
8010-135

DRAWN
A.L.W.

SCALE
N.T.S.

DRAWING NUMBER

SKE-E1

DATE
19/03/2014

CHECKED
A.L.W.

REVISION
00

FILE




Ottawa :
100-1960 Robertson Road, Suite 100, K2H 5B9
T.(613) 596.6454 F.(613) 596.3346
www.WBBPengineering.com

Gatineau :
430 de l'hôpital bld, suite 210, J8V 1T7
T.(819) 778.2448 F.(819) 778.5031

Consulting Engineers

ADDENDUM NO. E02
ADDENDA NO. E02

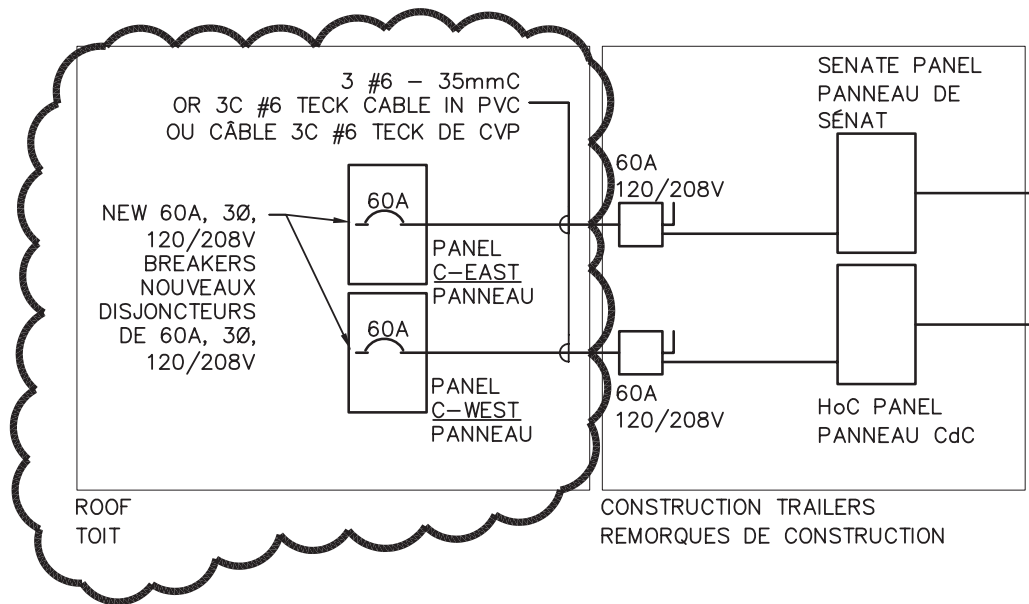

PROJECT
PROJECT NO. R.008227.002 ☐
PROJET NO. R.008227.002 ☐

DRAWING TITLE
PARTIAL SINGLE LINE DIAGRAM
TEMPORARY DISTRIBUTION
DIAGRAMME UNIFILAIRE PARTIELLE
DISTRIBUTION TEMPORAIRE

BPA PROJECT #
8010-135

DRAWN
A.L.W.

SCALE
N.T.S.

DRAWING NUMBER

SKE-E2

DATE
19/03/2014

CHECKED
A.L.W.

REVISION
00

FILE