DOZER D8

EXCAVATION OF TAILINGS



EXCAVATED TAILINGS



EXCAVATOR
(1.9m^3 CAPACITY)



1.5" SCREEN



40 TON HAUL TRUCK



STOCKPILE WITH HEATED STORAGE DOME



FRONT END LOADER
(2.7m^3 CAPACITY)



DUMP TRUCKS (x3)
(6.1m^3 MAX CAPACITY)



ONE DAY STORAGE AREA
(~100-460m^3)



FRONT END LOADER
(5.7m^3 CAPACITY)

TAILINGS FEED PILE
(10-15m^3)



EXCAVATOR
(1.9m^3 CAPACITY)



SUPER B WATER TANK
(50m^3 CAPACITY)

BLACK WATER TANK
(11.3m^3 MAX CAPACITY)

WHITE WATER TANK
(19m^3 MAX CAPACITY)





WATER TRUCK
(16m^3 MAX CAPACITY)



WATER TRUCK
(16m^3 MAX CAPACITY)



STANDBY WATER TRUCK
(16m^3 MAX CAPACITY)



CEMENT SILO #1
(7m^3 CAPACITY)



MIXER #1 (VOLVO)
(100m^3/hr CAPACITY)

GRAVITY TO
BOREHOLE

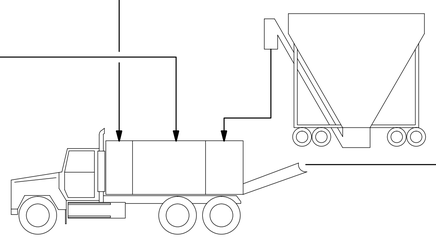

CEMENT SILO #2
(7m^3 CAPACITY)

MIXER #2 (PETERBILT)
(100m^3/hr CAPACITY)

GRAVITY TO
BOREHOLE

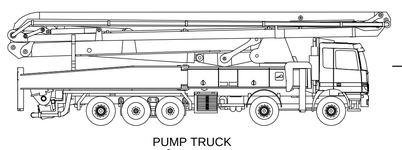

PUMP TRUCK
(170m^3/hr CAPACITY)

TO BOREHOLE

Public Works and Government Services Canada
Travaux publics et Services gouvernementaux Canada

REAL PROPERTY SERVICES
Western Region
SERVICES IMMOBILIERS
Région de l'ouest

PRELIMINARY
NOT FOR CONSTRUCTION

Golder Associates

LEGEND

DO NOT SCALE DRAWINGS

###	###	###
###	###	###
###	###	###
###	###	###
###	###	###
A	FOR REVIEW	13/12/02
Revision/ Revision	Description/Description	Date/Date

Client/client

PUBLIC WORKS GOVERNMENT SERVICES CANADA

Project title/Titre du projet

GIANT MINE REMEDIATION PROJECT YELLOWKNIFE, N.W.T.

Approved by/Approuve par
S.L

Designed by/Concept par
A.V.

Drawn by/Dessine par
A.V.

PWGSC Project Manager/Administrateur de Projets TPSGC
DAVE COLBOURNE

PWGSC, Architectural and Engineering Resources Manager/ Ressources Architectural et de Directeur d'Ingénierie, TPSGC

Client/client
DE'TON CHO / NUNA

Drawing title/Titre du dessin

PASTE PRODUCTION AREA PROCESS FLOW DIAGRAM

Project No./No. du projet	Sheet/Feuille	Revision no./ La Révision no.
13-1426-0010	1 OF 1	A

CADD FILE LOCN: P:\2013\13-1426-0010 PWGSC GIANT MINE - GAL BURNABY\PROCESS\13-1426-0010-P-001.DWG

PWGSC – A1 – 841X594

0 10 20 30 40 50 60 70 80 90 100mm

13-1426-0010-P-001