


DRAWING NOTES:

- [1] SOLENOID VALVES (N.O.) FOR WATER SUPPLY TO SECURITY FIXTURES C/W BYPASS VALVE (N.C.). SEE SCHEMATIC.
- [2] PROVIDE SHUT-OFF SWITCH TO CLOSE SOLENOID VALVES FOR HOT AND COLD WATER SUPPLY TO FIXTURES. REFER TO "CW AND HW TO SECURITY FIXTURES SCHEMATIC". MOUNT AT 1,200 A.F.F. COORDINATE WITH DIVISION 26 FOR POWER.
- [3] CONNECT TO EXISTING VENT.
- [4] THERMOSTATIC MIXING VALVE IN RECESSED CABINET. ACCESS FROM ROOM AD104.
- [5] EXISTING VENT TO REMAIN.
- [6] CONNECT DHWR TO DHW IN WALL CAVITY WITHIN 450mm FROM LOW FLOW FIXTURE. TYPICAL.

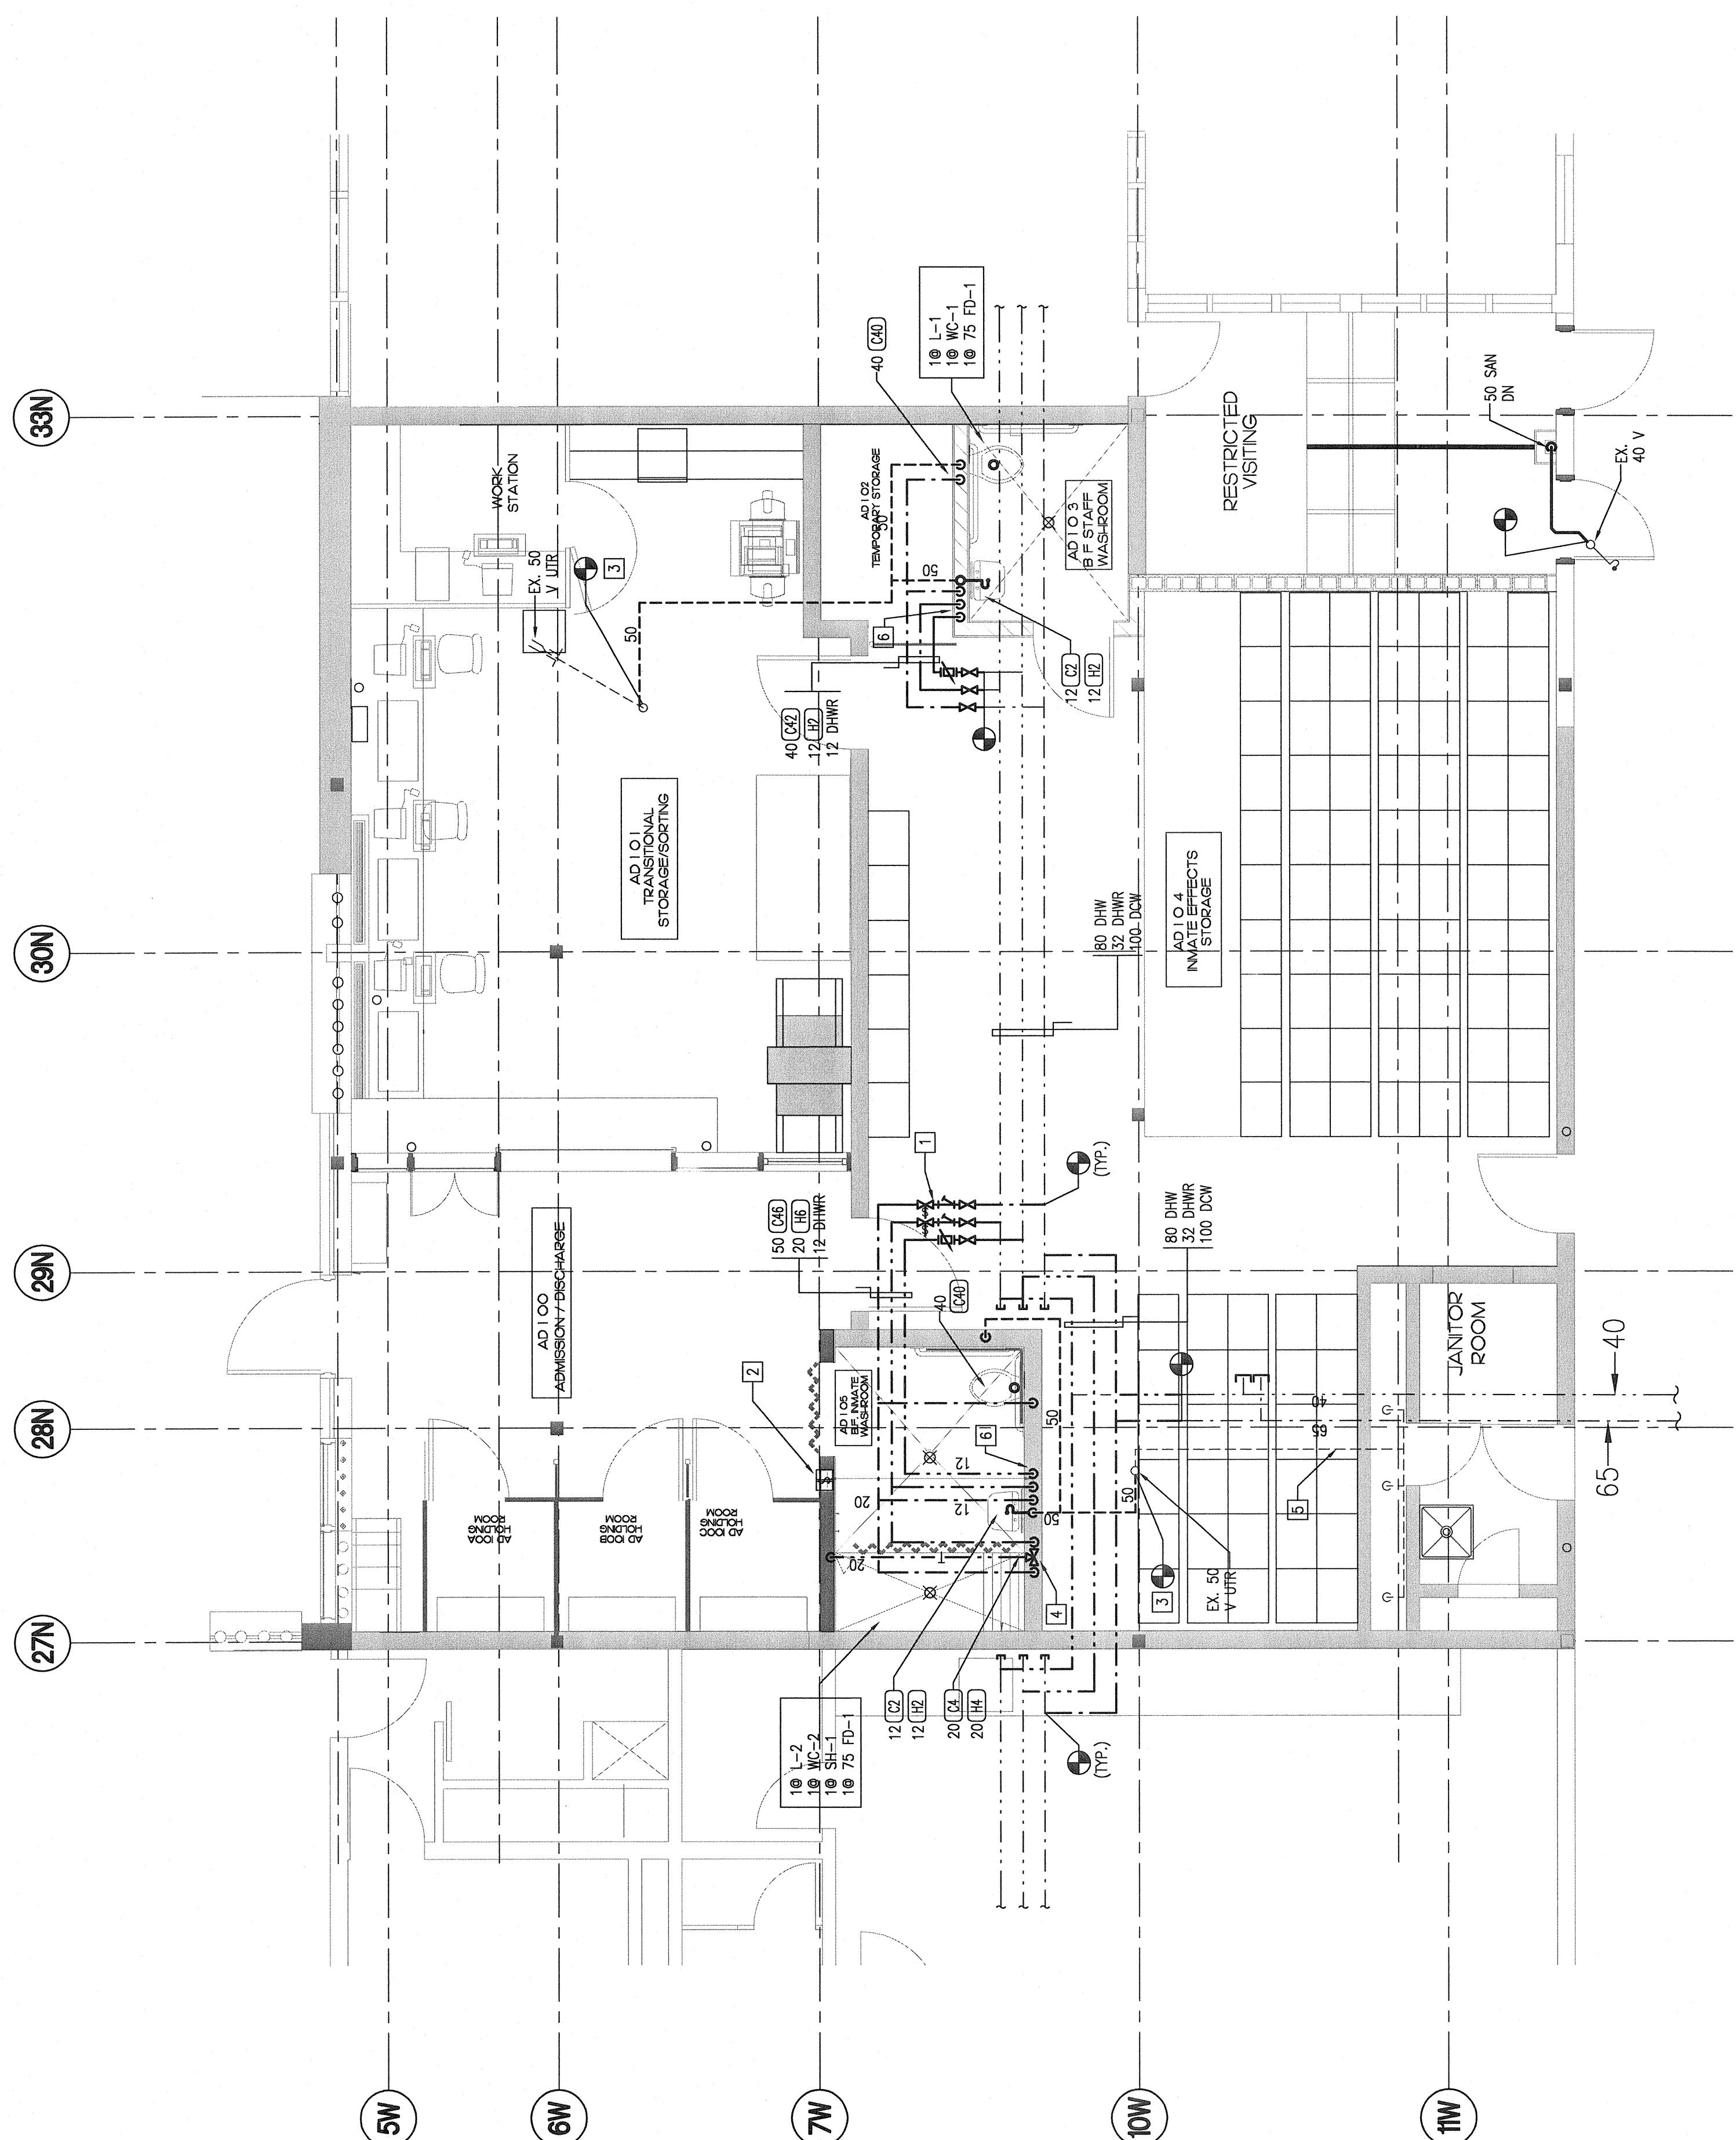

PARTIAL MAIN FLOOR - RENOVATION

CORRECTIONAL SERVICE OF CANADA

KENT INSTITUTION A AND D REDEVELOPMENT

Consultant Signature Box Only

Designed by Concept bar

M. NG

M. NG / 2013.08.09

DARYL SINCLAIR
FWGSC Project Manager/Administrator

PWGSC, Regional Manager, Architecte
Gestionnaire régionale, Services d'ar
OBEST KILLEAS

Drawing title/Titre du dessin

PARTIAL MAIN FLLOOR
RENOVATION B1

卷之三

卷之三

卷之三

DMEXXX