


NOTE:  
METAL STAND & TANK  
TO CONFORM TO  
NATIONAL BUILDING  
CODE 2010 & CSA B139.

:PAINT TANK STAND &  
PLATFORM c/w 2HR RATED  
INTUMESCENT COATING

32x32x3 HSS GUARDRAIL  
WELDED TO C6X10.5  
METAL STRINGERS &  
L50X50X6.4 STAND  
c/w C6X10.5 TREADS.  
WELD STAIR ASSEMBLY  
TO PLATFORM FRAMING

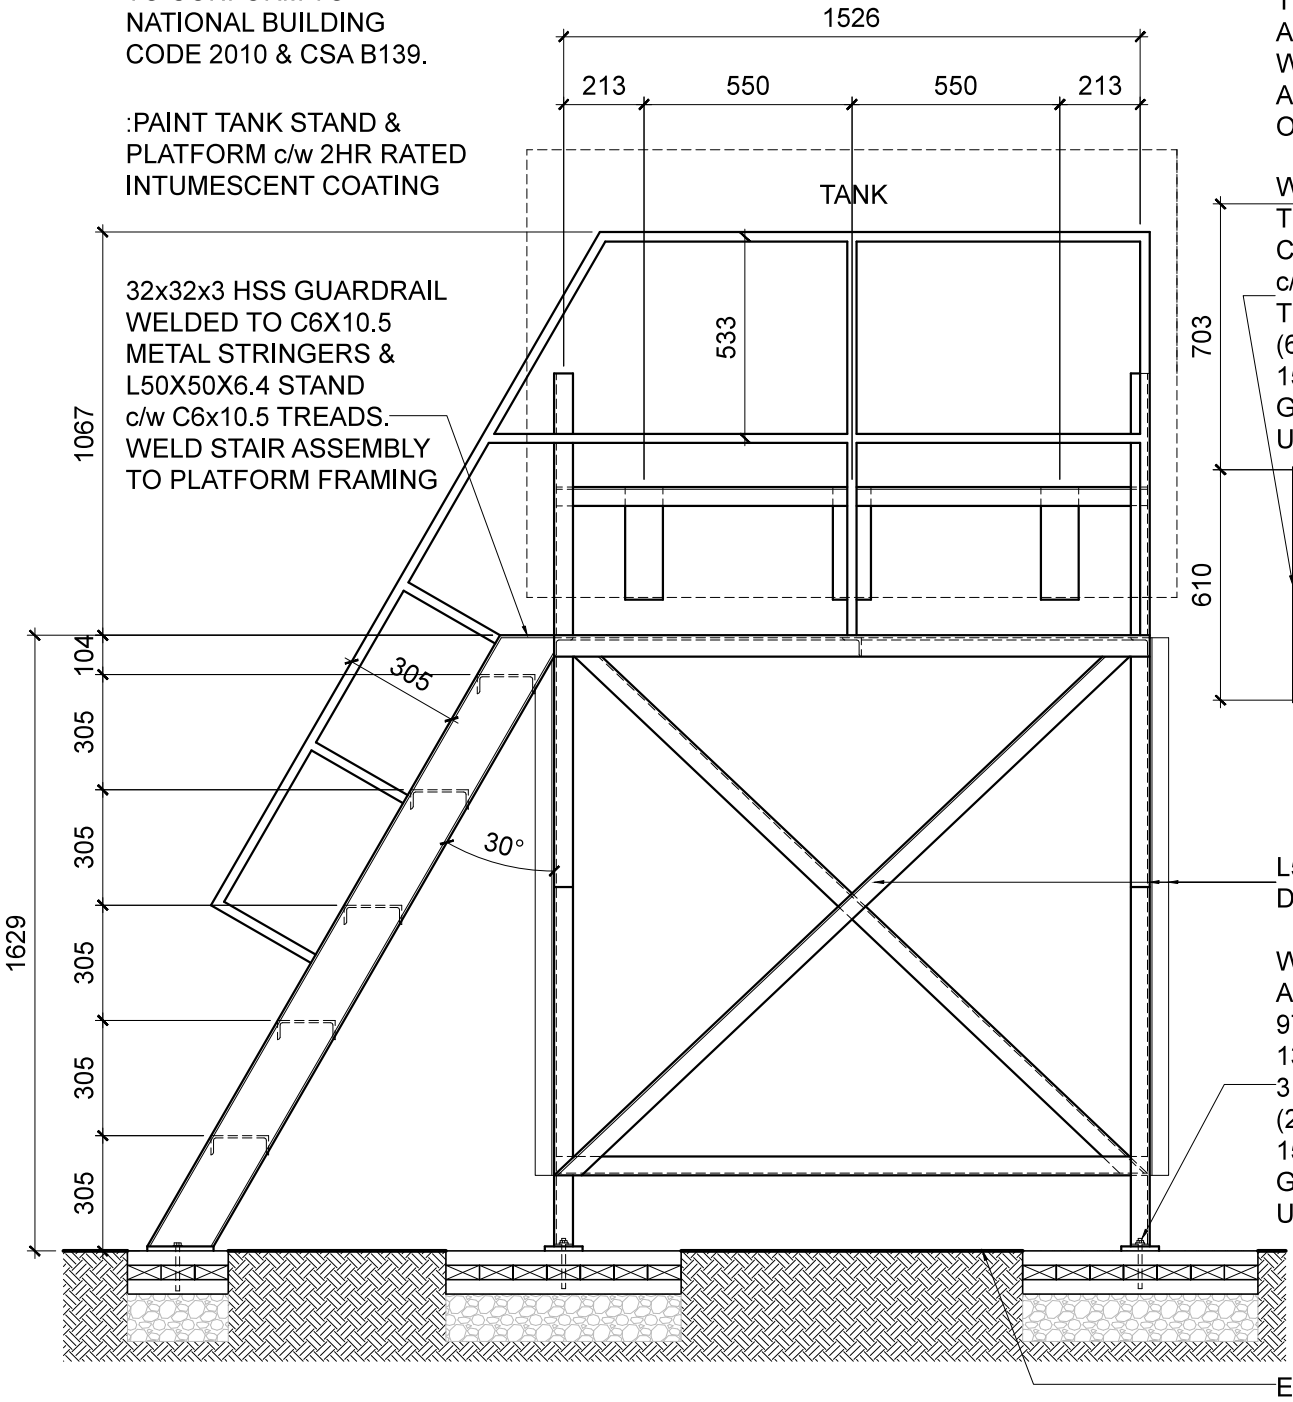

1 OIL TANK & STAND ELEVATION  
S1.0 SCALE 1:20

SECURE 2 STAND LEGS  
TO DECK OUTSIDE  
TRIMMER JOIST c/w  
ADJUSTABLE 63mm  
WIDE x 6mm THICK x  
A LENGTH DETERMINED  
ON SITE


WELD METAL PLATE  
TO BOTTOM OF BOTH  
C6X10.5 METAL STRINGERS  
c/w 13mm THRU BOLT  
TO 3 PLY P/T 38x89 BASE  
(623x267x114)  
150mm COMPACTED  
GRAVEL ON  
UNDISTURBED GRND.

L50x50x6.4 (TYP.)  
DIAGONAL BRACE

WELD & SECURE 4  
ANGLE LEGS TO  
979x100x6.4 BASE c/w  
13mm ANCHOR BOLT TO  
3 PLY P/T 38x89 BASE  
(2-979x623x114)  
150mm COMPACTED  
GRAVEL ON  
UNDISTURBED GRND.

EXISTING GRADE

2 TANK STAND PLAN  
S1.0 SCALE 1:20

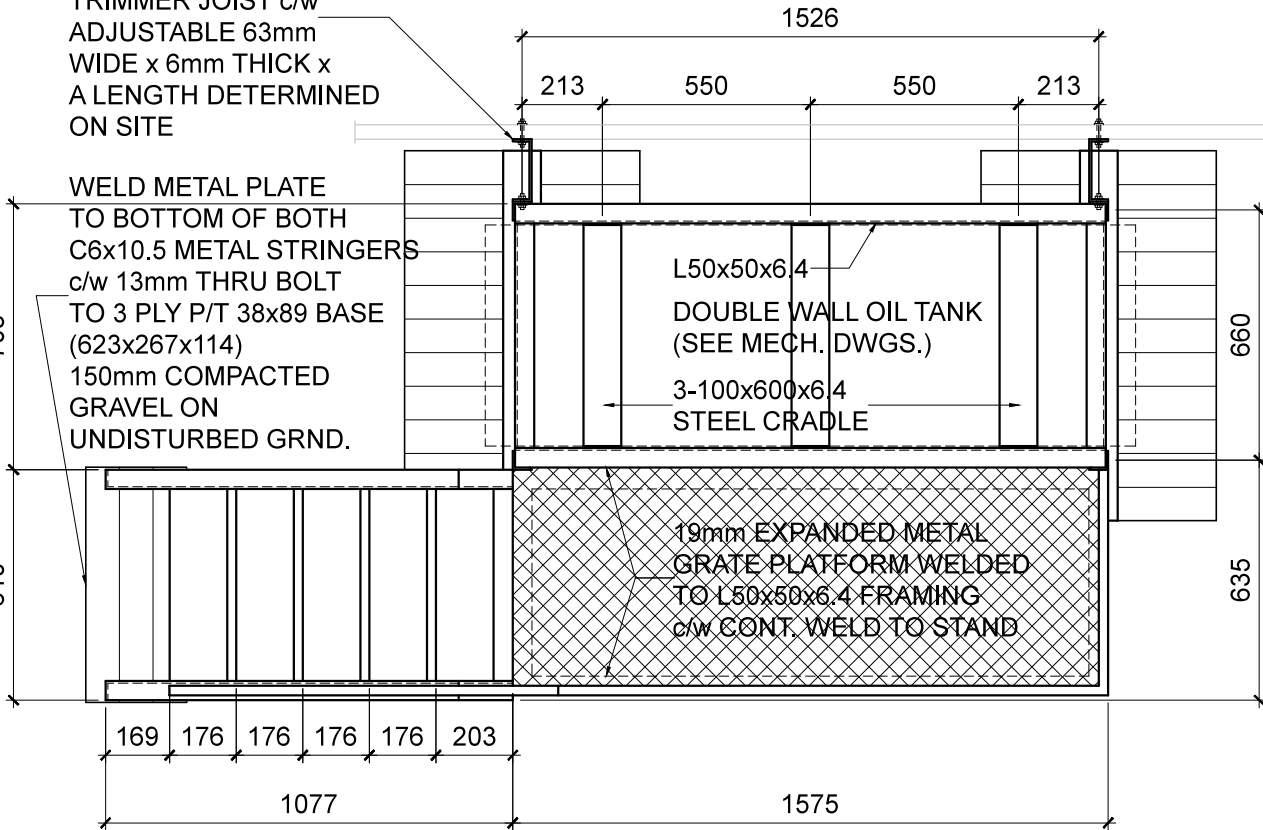

Canada



Public Works and  
Government Services  
Canada

Travaux publics et  
services gouvernementaux  
Canada

GUY ARCHITECTS

P.O BOX 1136  
YELLOWKNIFE, NT  
Canada X1A 2N8

P (867) 873-3266

F (867) 873-3366

E wayne@guyarchitects.com

W www.guyarchitects.com

ARCHITECTURE • INTERIOR • PLANNING

Contractor to verify all dimensions  
& conditions on site and immediately  
notify the engineer of all discrepancies.

01	ISSUED FOR ADDENDUM #1	06/11/14
revisions	description	date

A	A detail no. no. du detail	A
C	B location drawing no. sur dessin no.	B
	C drawing no. dessin no.	C

project

FURNACE REPLACEMENT  
9 & 11 Ptarmigan Ave.,  
18 & 20 Sahcho Ave.  
& 12 Riverview Road  
NORMAN WELLS, NWT

drawing

TANK STAND PLAN & ELEVATION

Designed By

Conçu par

Date

(yyyy/mm/dd)

Drawn By PWL

Dessiné par

Date 05/26/14

(yyyy/mm/dd)

Reviewed By WRG

Examiné par

Date 05/26/14

(yyyy/mm/dd)

Approved By

Approuvé par

Date

(yyyy/mm/dd)

Tender

Soumission

Project Manager

Administrateur de projets

Project no.

No. du projet

PWGSC Project No. R.015993.477  
Contract No. EW038-141068/001PWU

Drawing no.

No. du dessin

S1.0