


1 VIEW OF UNDERSIDE OF CANOPY - FRONT ENTRANCE

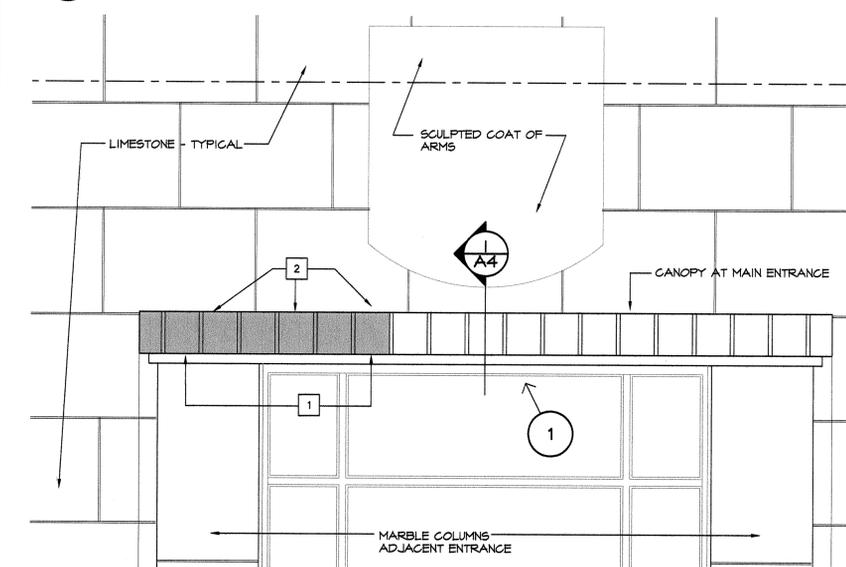

ELEVATION
SCALE : 1:20


TEST OPENING # 8

INTENT: TO CONFIRM AS-FOUND CANOPY ASSEMBLY AT MAIN ENTRANCE, AND AS-FOUND CONDITIONS OF CANOPY, ADJACENT STONE WALLS / COLUMNS, METAL FLASHINGS, TRANSITION MEMBRANE FLASHINGS, AND SEALANTS. TO CONFIRM AS-FOUND CONDITION OF CANOPY SOFFIT. TO INVESTIGATE POSSIBLE SOURCES OF MINERAL DEPOSITS AND STAINING ON ADJACENT STONE. PROVIDE TEMPORARY SHORING AS REQUIRED.

TAKE SPECIAL PRECAUTIONS TO ENSURE PROTECTION OF SCULPTED COAT OF ARMS FROM DAMAGE DURING THE WORK OF THIS INVESTIGATIVE OPENING.

AFTER COMPLETION OF TEST OPENING REVIEW, REASSEMBLE AND REINSTATE ALL MATERIALS. CLOSE OFF OPENING AND MAKE GOOD AND WATER TIGHT.

- 1 CAREFULLY REMOVE 1 OR 2 SCALLOPED STONES AT CANOPY FASCIA (SHOWN SHADED) TO REVEAL AS-FOUND CONDITION OF CANOPY / SOFFIT ASSEMBLY. AVOID DAMAGE TO ADJACENT MATERIALS. PROVIDE TEMPORARY SHORING.
 - SAWCUT HORIZONTAL MORTAR JOINTS USING ONE CUTLINE INITIALLY TO ALLOW FOR RAKING OUT BY HAND TOOLS. DO NOT SAWCUT VERTICAL JOINTS.
 - RECORD STONES ON A KEY DRAWING AND MARK STONES FOR RE-INSTATEMENT TO MATCH THEIR EXISTING LOCATION AND ORIENTATION.
 - STORE IN A MANNER THAT PREVENTS DAMAGE TO STONE UNITS.
- 2 CAREFULLY REMOVE METAL FLASHING AS REQUIRED TO ALLOW REMOVAL OF SCALLOPED FASCIA STONES. RE-INSTALL METAL FLASHING AT END OF TEST AND MAKE GOOD.

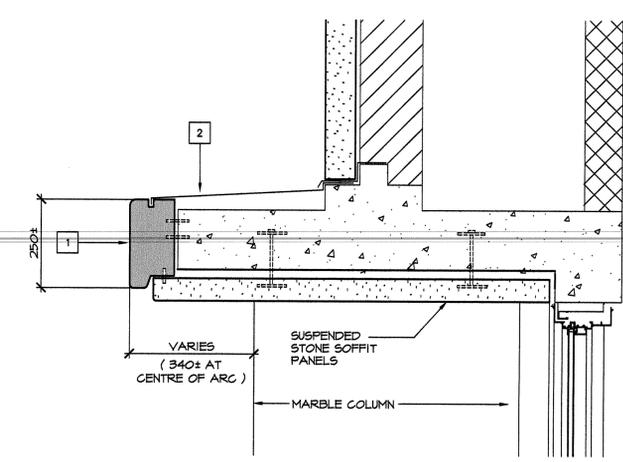

AS-BUILT SECTION

TEST OPENING # 8: MAIN ENTRANCE CANOPY

SCALE : 1:10

0	ISSUED FOR TENDER	05/12/2014
revisions		date
project	WALL CLADDING & ROOF INVESTIGATION GOVERNMENT OF CANADA BUILDING 633 QUEEN STREET, FREDERICTON, NB	
drawing	design	
INVESTIGATIVE OPENING No. 8		
designed	conqu	
date		
drawn	GK	
date	MAY 12, 2014	
approved	RG	
date	12 June 2014	
Tender	Submission	
PWSC Project Manager	Administrateur de projets TPSCC	
project number	no. du projet	
	R.063299.001	
drawing no.	no. du dessin	
	A4	

