

RETURN BIDS TO:

RETOURNER LES SOUMISSIONS À:

Bid Receiving - PWGSC / Réception des soumissions
- TPSGC

11 Laurier St. / 11, rue Laurier

Place du Portage, Phase III

Core 0A1 / Noyau 0A1

Gatineau, Québec K1A 0S5

Bid Fax: (819) 997-9776

Revision to a Request for a Standing Offer

Révision à une demande d'offre à commandes

National Individual Standing Offer (NISO)

Offre à commandes individuelle nationale (OCIN)

The referenced document is hereby revised; unless otherwise indicated, all other terms and conditions of the Offer remain the same.

Ce document est par la présente révisé; sauf indication contraire, les modalités de l'offre demeurent les mêmes.

Comments - Commentaires

Vendor/Firm Name and Address

Raison sociale et adresse du
fournisseur/de l'entrepreneur

Issuing Office - Bureau de distribution

Industrial Vehicles & Machinery Products Division
11 Laurier St./11, rue Laurier
7B1, Place du Portage, Phase III
Gatineau
Québec
K1A 0S5

Title - Sujet PACKAGING MATERIALS	
Solicitation No. - N° de l'invitation W8486-138388/C	Date 2014-07-21
Client Reference No. - N° de référence du client W8486-138388	Amendment No. - N° modif. 001
File No. - N° de dossier hs634.W8486-138388	CCC No./N° CCC - FMS No./N° VME
GETS Reference No. - N° de référence de SEAG PW-\$SHS-634-65321	
Date of Original Request for Standing Offer 2014-07-03	
Date de la demande de l'offre à commandes originale	
Solicitation Closes - L'invitation prend fin at - à 02:00 PM on - le 2014-07-31	
Time Zone Fuseau horaire Eastern Daylight Saving Time EDT	
Address Enquiries to: - Adresser toutes questions à: Paquin, Benoit	Buyer Id - Id de l'acheteur hs634
Telephone No. - N° de téléphone (819) 956-3966 ()	FAX No. - N° de FAX (819) 956-5227
Delivery Required - Livraison exigée	
Destination - of Goods, Services, and Construction: Destination - des biens, services et construction:	
Security - Sécurité This revision does not change the security requirements of the Offer. Cette révision ne change pas les besoins en matière de sécurité de la présente offre.	

Instructions: See Herein

Instructions: Voir aux présentes

Acknowledgement copy required Accusé de réception requis	Yes - Oui <input type="checkbox"/>	No - Non <input type="checkbox"/>
The Offeror hereby acknowledges this revision to its Offer. Le proposant constate, par la présente, cette révision à son offre.		
Signature	Date	
Name and title of person authorized to sign on behalf of offeror. (type or print) Nom et titre de la personne autorisée à signer au nom du proposant. (taper ou écrire en caractères d'imprimerie)		
For the Minister - Pour le Ministre		

Solicitation No. - N° de l'invitation

W8486-138388/C

Amd. No. - N° de la modif.

001

Buyer ID - Id de l'acheteur

hs634

Client Ref. No. - N° de réf. du client

W8486-138388

File No. - N° du dossier

hs634W8486-138388

CCC No./N° CCC - FMS No/ N° VME

Amendment 001 is raised to provide a supplier's questions and Technical authority answers.

Subject: Questions and Answers

-
- 1) Lunch Boxes:** How many lunch boxes should be packed per carton, only spec is 25 lbs max, is that the only spec to be followed?

In the request for proposal, page 23 of 37 (Section B – Resulting Contract Clauses, Part 7 – Preparation for Delivery), the table specifies:

The Contractor must package all items as follow:

NSN 8115-21-8419984 (Lunch box)	1 PG of 100 each
---------------------------------	------------------

Therefore 100 boxes should be packaged per carton. For other packing instructions, please make sure to follow instructions found in document D-LM-008-036/SF-000 included on the CD.

-
- 2) Water Tube:** How many tubes should be packed per carton, only spec is 25 lbs max, is this only spec to be followed?

In the request for proposal, page 23 of 37 (Section B – Resulting Contract Clauses, Part 7 – Preparation for Delivery), the table specifies:

The Contractor must package all items as follow:

NSN 8105-21-8553225 (Water bag)	1 PG of 250 each
---------------------------------	------------------

Therefore 250 bags should be packaged per carton. For other packing instructions, please make sure to follow instructions found in document D-LM-008-036/SF-000 included on the CD.

-
- 3) Water Box:** Should flap be glued? Could we get spec sheet 43-GP-21? How many boxes should be packed per carton, only spec is 25 lbs max, is this only spec to be followed?

This is a three parts question.

Part A (Flap)

Yes the flap should be glued and the box ready to be assembled.

Part B (Spec sheet 43-GP-21)

Spec Sheet 43-GP-21 was superseded by standard CAN/CGSB-43.22. CAN/CGSB-43.22 is available for purchase from the Canadian General Standards Boards (CGSB). The contact information for the CGSB can be found in the request for proposal on page 24 of 37 (Section B – Resulting Contract Clauses, Part 9 – Canadian General Standards Board - Standards).

Part C (Packaging)

In the request for proposal, page 23 of 37 (Section B – Resulting Contract Clauses, Part 7 – Preparation for Delivery), the table specifies:

The Contractor must package all items as follow:

NSN 8115-21-8553226 (Water box)	1 BD of 25 each
---------------------------------	-----------------


Therefore 25 boxes should be packaged per carton. For other packing instructions, please make sure to follow instructions found in document D-LM-008-036/SF-000 included on the CD.

-
- 4) **Rifle Box:** Specs read for B Flute and Double Wall, B Flute is not double wall corrugated, please advise. Specs mention immersion test, a carton box will not pass full immersion test even if laminated, should this box be made out of Coroplast (plastic) or could we get specific on what immersion test is? Again, how many boxes should be packed per carton, only spec is 25 lbs max, is this only spec to be followed?


This is a three parts question.

Part A (Flute and Double Wall)

It is possible to have B flutes and double wall. B flute specifies the dimensions of the flute and double wall the number of partitions (3). To be more specific, what we want is a B+B flute double wall corrugated cardboard box. Please see sketch below for a visual example.

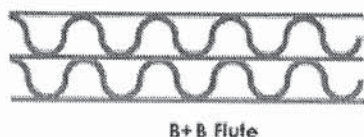

Double Wall Corrugated Sheet

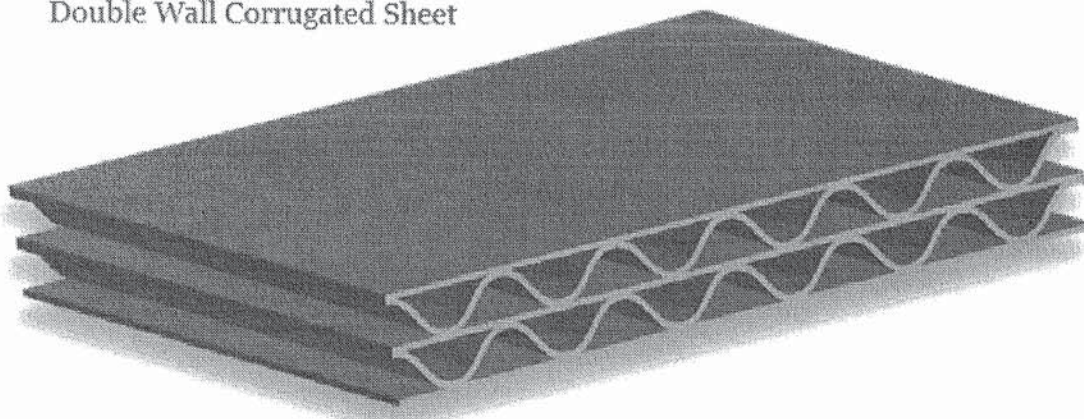

Part B (Immersion Test)

There is no need to use plastic. The technical drawing C70 E00176 clearly specifies the test as follow:

Bursting Test:

B) Wet – Minimum test per square inch will be 7.03 kg/cm² after immersion for 24 hours in fresh tap water maintained at a temperature of 24 °C +/- 2°C. Test to be carried out in accordance with Canadian Freight Classification CFC6000, Section 2, Note 2, Rule 41.

Part C (Packaging)

In the request for proposal, page 23 of 37 (Section B – Resulting Contract Clauses, Part 7 – Preparation for Delivery), the table specifies:

The Contractor must package all items as follow:

NSN 8115-21-1025209 (Rifle box)	1 BD of 25 each
---------------------------------	-----------------

Therefore 25 boxes should be packaged per carton. For other packing instructions, please make sure to follow instructions found in document D-LM-008-036/SF-000 included on the CD.

.....