



### Electrical Notes

- 1 REMOVE EXISTING RECEPTACLE FED FROM THE UPS PANEL, CIRCUIT UAA5. PROVIDE BLANK PLATE. REMOVE WIRING FROM PANEL TO RECEPTACLE. MARK CIRCUIT SPARE IN PANELBOARD DIRECTORY.
- 2 REMOVE UPS RECEPTACLES FEEDING CCTV MONITORS, CIRCUIT UAA3. PROVIDE BLANK PLATES. EXTEND CIRCUIT TO FEED EXISTING CCTV MONITORS IN ROOM 100. PLUG CCTV MONITORS INTO NEW CIRCUIT. MARK NEW CIRCUIT IN PANELBOARD DIRECTORY.
- 3 REMOVE TWO UPS CIRCUITS (UAA7, UAA9) FROM OLD CONSOLE AND ROUTE TO NEW CONSOLE IN ROOM 100.
- 4 EXTEND CIRCUIT FOR BAGGAGE X-RAY MACHINE TO NEW LOCATION. MODEL NUMBER FOR BAGGAGE X-RAY MACHINE IS SMITHS 6040DS.
- 5 REMOVE WALK-THROUGH METAL DETECTOR. EQUIPMENT IS NOT BOLTED TO THE CONCRETE FLOOR. THERE ARE NO DATA CABLES. THE UNIT PLUGS INTO A STANDARD 120V, 15A RECEPTACLE. MODEL NUMBER FOR WALK-THROUGH METAL DETECTOR IS METOR 200HS. TURN OVER EQUIPMENT TO DEPARTMENTAL REPRESENTATIVE.


### Legend

- SPECIAL POWER CONNECTION
- JUNCTION BOX
- DUPLEX RECEPTACLE
- WALL MOUNTED LIGHT FIXTURE
- FLUORESCENT FIXTURE
- LIGHT SWITCH
- LIGHT SWITCH W/DIMMER
- TELECOMMUNICATIONS
- E-STOP FOR X-RAY MACHINE
- DOOR CONTROL STATION
- INTERCOM MASTER STATION
- INTERCOM HORN & PUSHBUTTON
- CCTV MONITOR
- FIRE ALARM PULL STATION
- CCTV CAMERA

DRAWING # - E10 PHOTO TAG  
PHOTO # - E10

### Existing Main Floor Plan

1 : 50

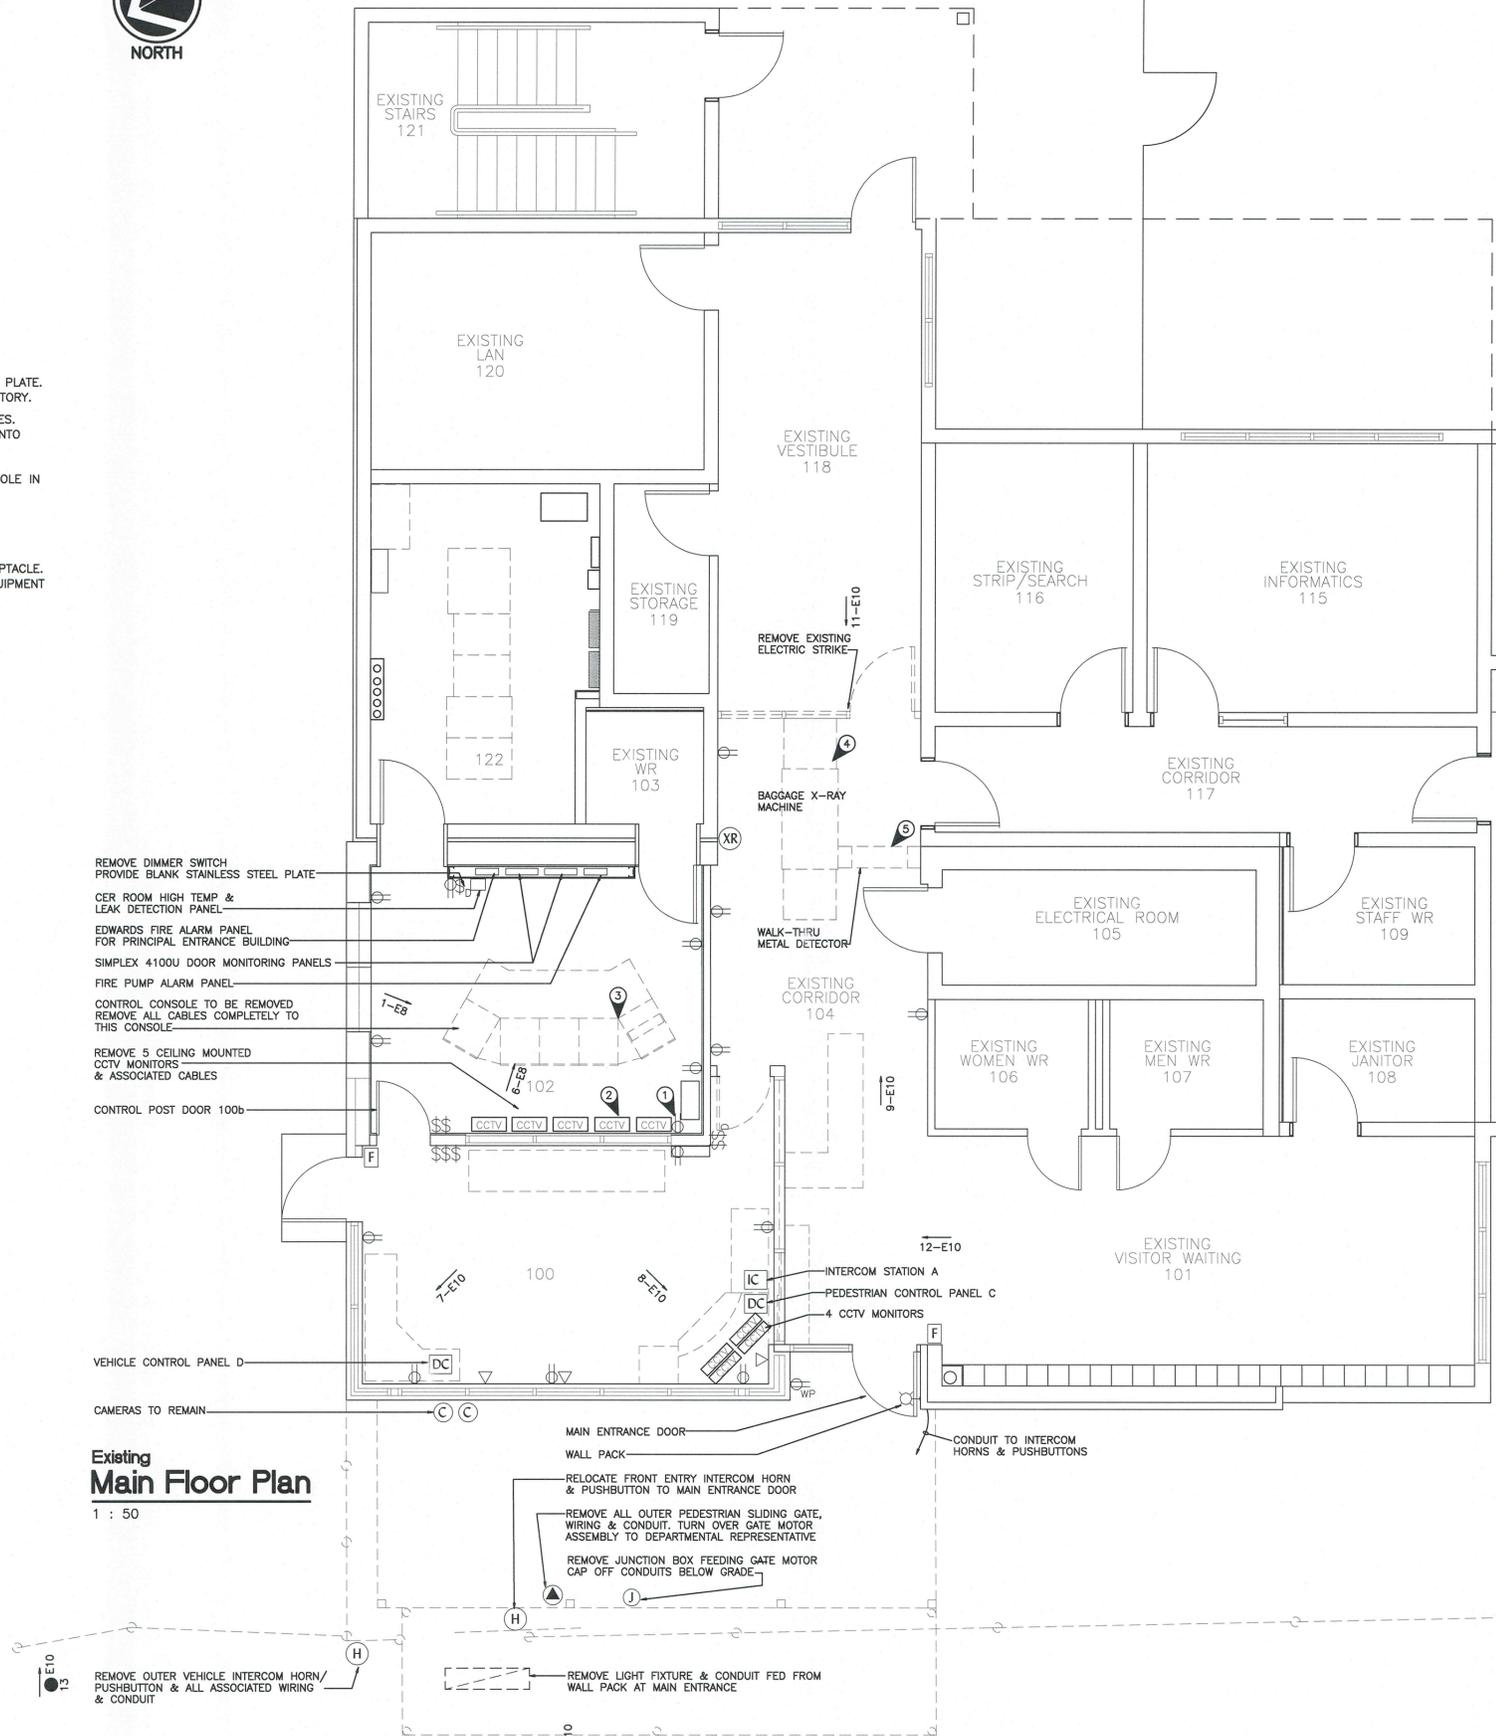

Revision/Revision	Description/Description	Date/Date
Issue for Tender		June 2014

Client/client

Correctional Service Canada  
Metchosin BC  
William Head Institution

Project title/Titre du projet

Principal Entrance  
Renovations

Consultant Signature Only

Designed by/Concept par  
G. Robertshaw

Drawn by/Dessiné par  
D. Burns May 2014

PWGSC Project Manager/Administrateur de Projets /PWSG  
S. Leslie

A/Regional Manager, Architectural and Engineering Services  
Gestionnaire régionale, Services d'architectural et de génie, TPSGC  
O. Klutas

Drawing title/Titre du dessin

Electrical  
Existing  
Main Floor Plan

Project No./No. du projet	Sheet/Fauille	Revision no./ La Révision no.
R.066815.001	E1	

