


FENCELINE LEGEND

PROPOSED FRANGIBLE FENCE
 PROPOSED 1.2m HIGH CHAIN LINK FENCE

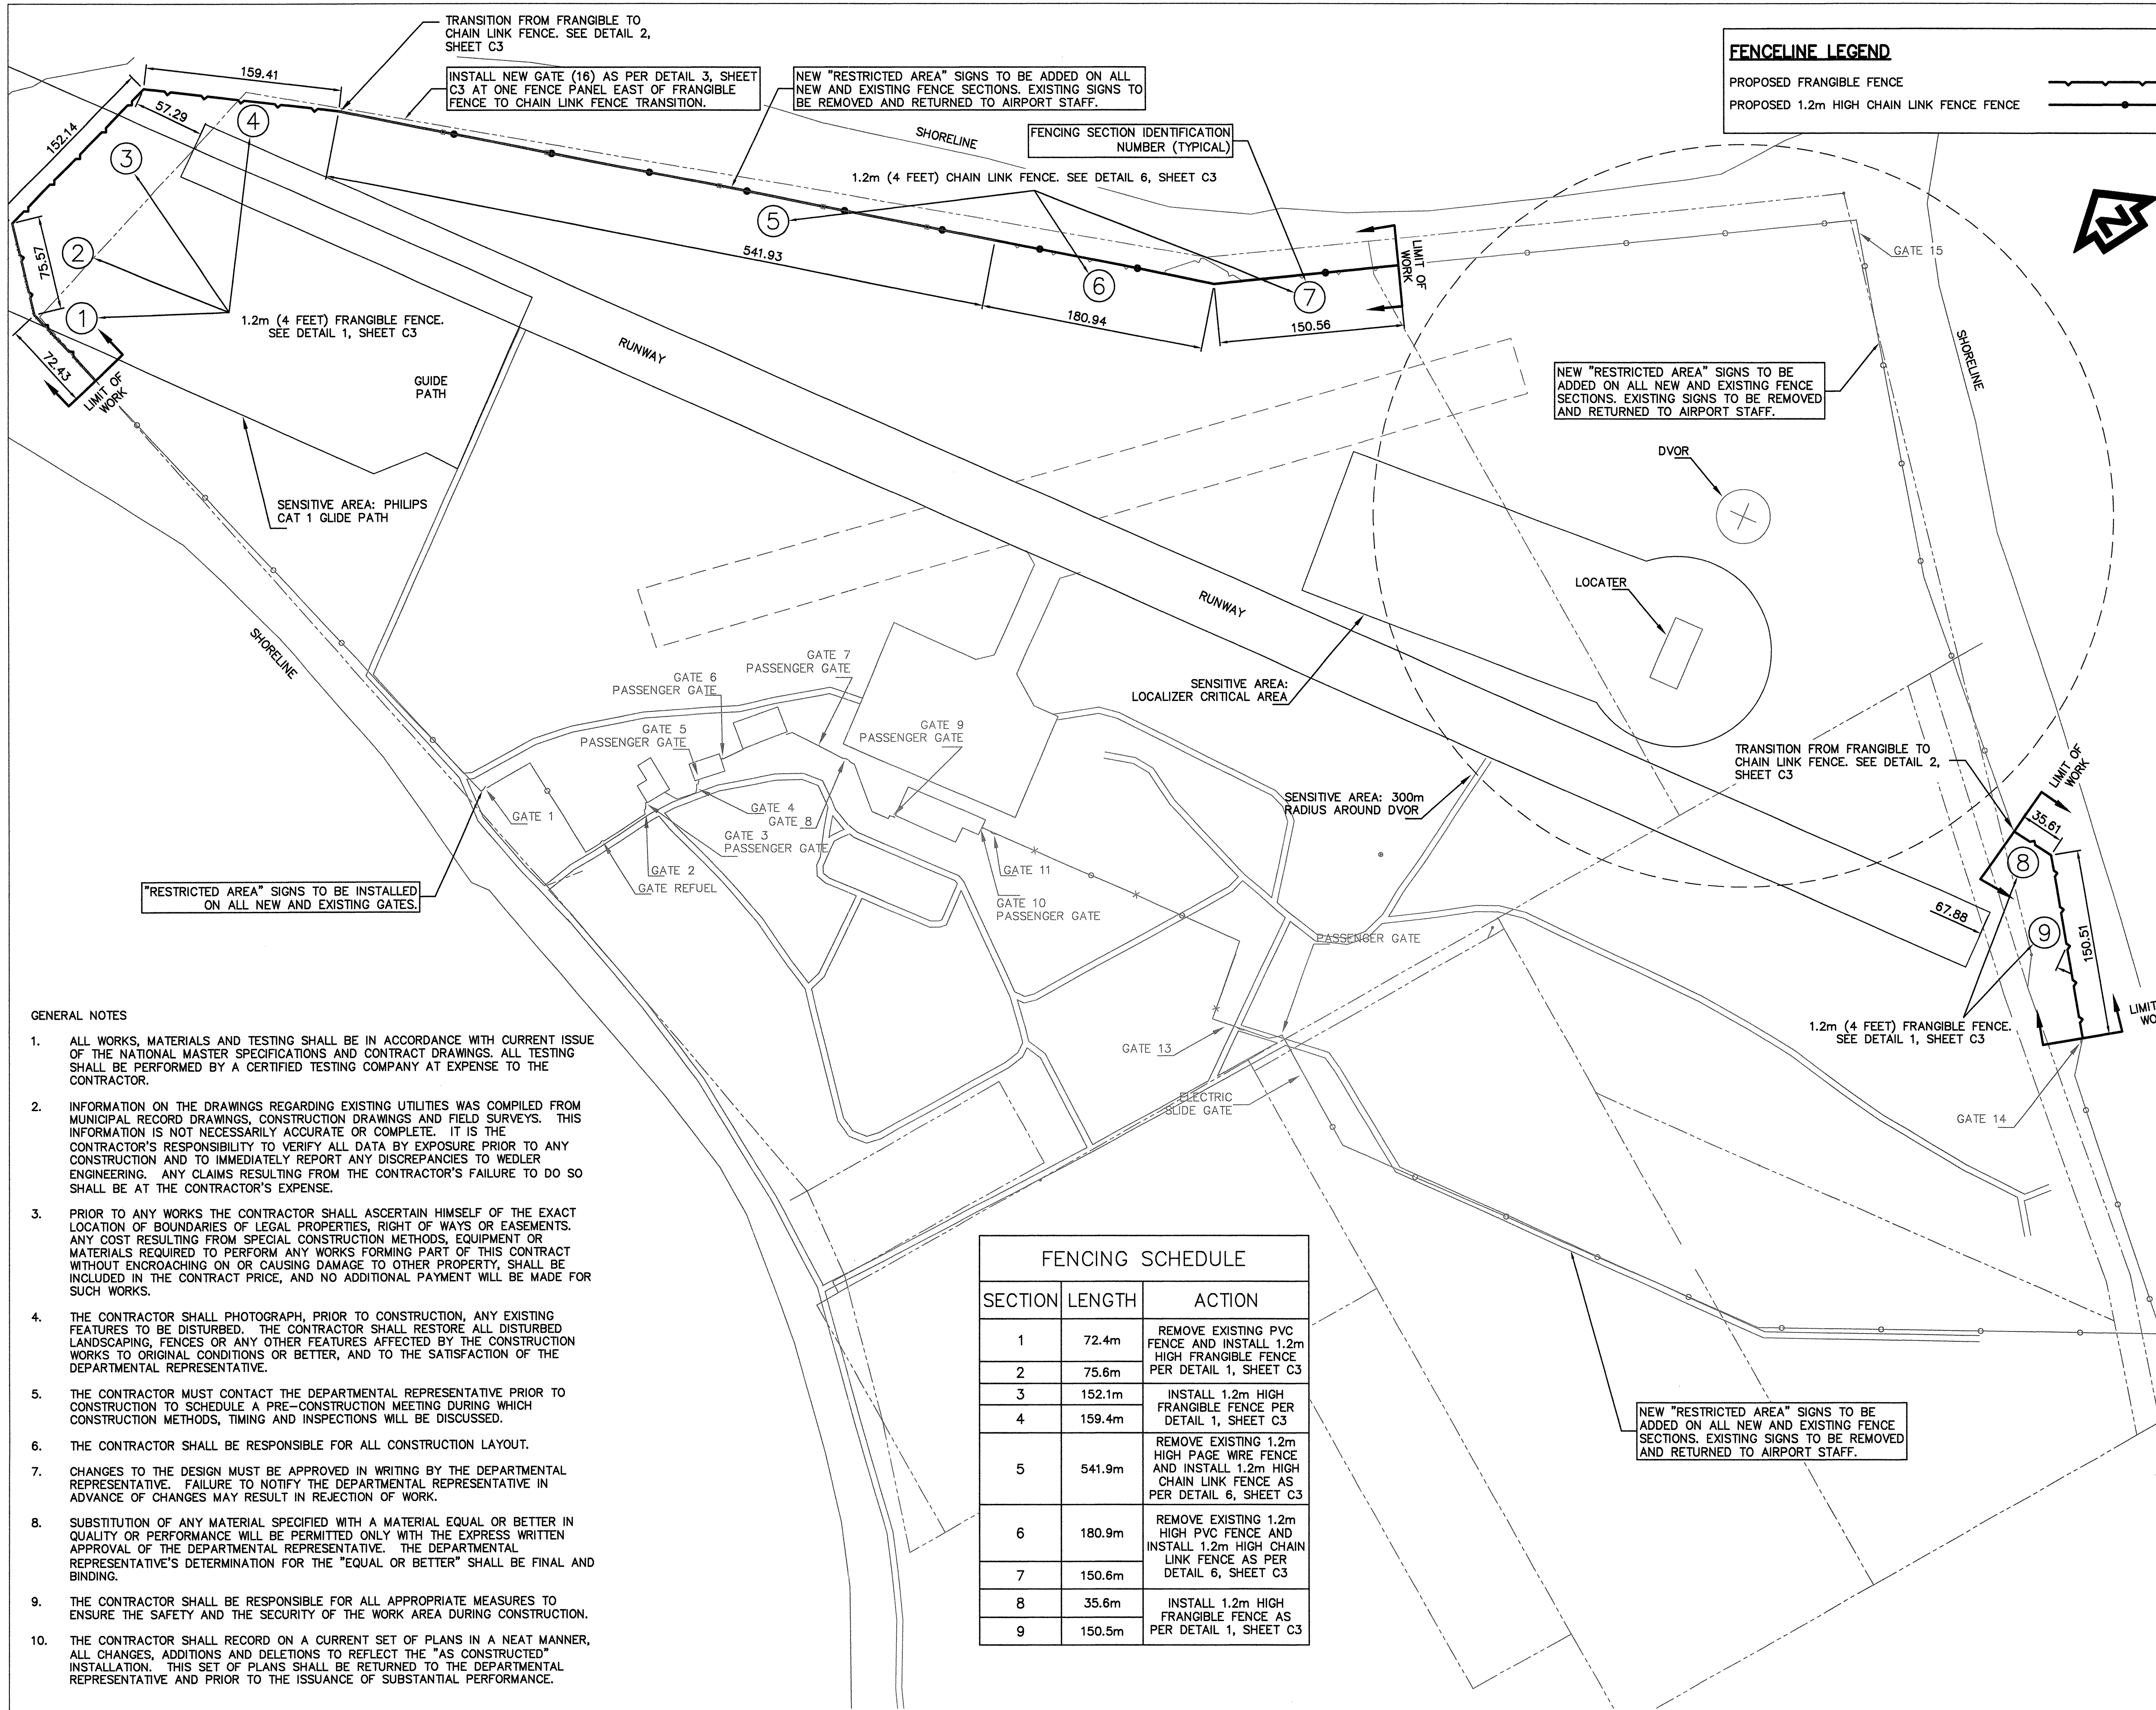

"RESTRICTED AREA" SIGNS TO BE INSTALLED ON ALL NEW AND EXISTING GATES.

NEW "RESTRICTED AREA" SIGNS TO BE ADDED ON ALL NEW AND EXISTING FENCE SECTIONS. EXISTING SIGNS TO BE REMOVED AND RETURNED TO AIRPORT STAFF.

NEW "RESTRICTED AREA" SIGNS TO BE ADDED ON ALL NEW AND EXISTING FENCE SECTIONS. EXISTING SIGNS TO BE REMOVED AND RETURNED TO AIRPORT STAFF.


GENERAL NOTES

- ALL WORKS, MATERIALS AND TESTING SHALL BE IN ACCORDANCE WITH CURRENT ISSUE OF THE NATIONAL MASTER SPECIFICATIONS AND CONTRACT DRAWINGS. ALL TESTING SHALL BE PERFORMED BY A CERTIFIED TESTING COMPANY AT EXPENSE TO THE CONTRACTOR.
- INFORMATION ON THE DRAWINGS REGARDING EXISTING UTILITIES WAS COMPILED FROM MUNICIPAL RECORD DRAWINGS, CONSTRUCTION DRAWINGS AND FIELD SURVEYS. THIS INFORMATION IS NOT NECESSARILY ACCURATE OR COMPLETE. IT IS THE CONTRACTOR'S RESPONSIBILITY TO VERIFY ALL DATA BY EXPOSURE PRIOR TO ANY CONSTRUCTION AND TO IMMEDIATELY REPORT ANY DISCREPANCIES TO WEDLER ENGINEERING. ANY CLAIMS RESULTING FROM THE CONTRACTOR'S FAILURE TO DO SO SHALL BE AT THE CONTRACTOR'S EXPENSE.
- PRIOR TO ANY WORKS THE CONTRACTOR SHALL ASCERTAIN HIMSELF OF THE EXACT LOCATION OF BOUNDARIES OF LEGAL PROPERTIES, RIGHT OF WAYS OR EASEMENTS. ANY COST RESULTING FROM SPECIAL CONSTRUCTION METHODS, EQUIPMENT OR MATERIALS REQUIRED TO PERFORM ANY WORKS FORMING PART OF THIS CONTRACT WITHOUT ENCROACHING ON OR CAUSING DAMAGE TO OTHER PROPERTY, SHALL BE INCLUDED IN THE CONTRACT PRICE, AND NO ADDITIONAL PAYMENT WILL BE MADE FOR SUCH WORKS.
- THE CONTRACTOR SHALL PHOTOGRAPH, PRIOR TO CONSTRUCTION, ANY EXISTING FEATURES TO BE DISTURBED. THE CONTRACTOR SHALL RESTORE ALL DISTURBED LANDSCAPING, FENCES OR ANY OTHER FEATURES AFFECTED BY THE CONSTRUCTION WORKS TO ORIGINAL CONDITIONS OR BETTER, AND TO THE SATISFACTION OF THE DEPARTMENTAL REPRESENTATIVE.
- THE CONTRACTOR MUST CONTACT THE DEPARTMENTAL REPRESENTATIVE PRIOR TO CONSTRUCTION TO SCHEDULE A PRE-CONSTRUCTION MEETING DURING WHICH CONSTRUCTION METHODS, TIMING AND INSPECTIONS WILL BE DISCUSSED.
- THE CONTRACTOR SHALL BE RESPONSIBLE FOR ALL CONSTRUCTION LAYOUT.
- CHANGES TO THE DESIGN MUST BE APPROVED IN WRITING BY THE DEPARTMENTAL REPRESENTATIVE. FAILURE TO NOTIFY THE DEPARTMENTAL REPRESENTATIVE IN ADVANCE OF CHANGES MAY RESULT IN REJECTION OF WORK.
- SUBSTITUTION OF ANY MATERIAL SPECIFIED WITH A MATERIAL EQUAL OR BETTER IN QUALITY OR PERFORMANCE WILL BE PERMITTED ONLY WITH THE EXPRESS WRITTEN APPROVAL OF THE DEPARTMENTAL REPRESENTATIVE. THE DEPARTMENTAL REPRESENTATIVE'S DETERMINATION FOR THE "EQUAL OR BETTER" SHALL BE FINAL AND BINDING.
- THE CONTRACTOR SHALL BE RESPONSIBLE FOR ALL APPROPRIATE MEASURES TO ENSURE THE SAFETY AND THE SECURITY OF THE WORK AREA DURING CONSTRUCTION.
- THE CONTRACTOR SHALL RECORD ON A CURRENT SET OF PLANS IN A NEAT MANNER, ALL CHANGES, ADDITIONS AND DELETIONS TO REFLECT THE "AS CONSTRUCTED" INSTALLATION. THIS SET OF PLANS SHALL BE RETURNED TO THE DEPARTMENTAL REPRESENTATIVE AND PRIOR TO THE ISSUANCE OF SUBSTANTIAL PERFORMANCE.

FENCING SCHEDULE

SECTION	LENGTH	ACTION
1	72.4m	REMOVE EXISTING PVC FENCE AND INSTALL 1.2m HIGH FRANGIBLE FENCE PER DETAIL 1, SHEET C3
2	75.6m	
3	152.1m	INSTALL 1.2m HIGH FRANGIBLE FENCE PER DETAIL 1, SHEET C3
4	159.4m	
5	541.9m	REMOVE EXISTING 1.2m HIGH PAGE WIRE FENCE AND INSTALL 1.2m HIGH CHAIN LINK FENCE AS PER DETAIL 6, SHEET C3
6	180.9m	REMOVE EXISTING 1.2m HIGH PVC FENCE AND INSTALL 1.2m HIGH CHAIN LINK FENCE AS PER DETAIL 6, SHEET C3
7	150.6m	
8	35.6m	INSTALL 1.2m HIGH FRANGIBLE FENCE AS PER DETAIL 1, SHEET C3
9	150.5m	

SCALE 1:2500



Revision/Description	Date/Date
3 ISSUED FOR TENDER	2014/08/09
2 100% COMPLETE - ISSUED FOR REVIEW	2014/08/12
1 99% COMPLETE - ISSUED FOR REVIEW	2014/07/09
0 88% COMPLETE - ISSUED FOR REVIEW	2014/05/12

TRANSPORT CANADA
 SANDSPIT AIRPORT
 HAIDA GWAIL, BC

Project title/Titre du projet
SANDSPIT AIRPORT PERIMETER FENCING

Consultant Signature Only
 WEDLER ENGINEERING LLP.
 Designed by/Concept par
 ARG
 Drawn by/Dessiné par
 TJD
 PWGSC Project Manager/Administrateur de Projets TPSGC
 TOM DUNPHY
 Regional Manager, Architectural and Engineering Services
 Gestionnaire régionale, Services d'architecture et de génie, TPSGC
 PREETIPAL PAUL

Drawing title/Titre du dessin
KEY PLAN / PROPOSED FENCE
 Project No./No. du projet
R.070274.001
 Sheet/Feuille
C2
 Revision no./La Révision no.
3

