

JETTY CONSTRUCTION TOLERANCES

TYPE 1 UNDERLAYER:
±150mm OF DESIGN GRADE, BUT NOT UNIFORMLY HIGH OR LOW

TYPE 2a ARMOUR ROCK
±400mm ON JETTY SLOPES, BUT NOT UNIFORMLY HIGH OR LOW AND
WITHIN -400mm OF DESIGN ELEVATION AT TOP OF THE CREST, BUT
NOT UNIFORMLY LOW. NO PORTION TO EXTEND ABOVE DESIGN
CREST ELEVATION

LIST OF ABBREVIATIONS





PL PROPERTY LINE
RSB ROCK SAND BOUNDARY
LLW LOWER LOW WATER
HHW HIGHER HIGH WATER
CHS CANADIAN HYDROGRAPHIC SERVICE

JETTY CREST CENTERLINE DESIGN ELEVATIONS (FOR WEIR ELEVATION SEE PROFILE)


STATION	ELEVATION
0+000 TO 1+000	4.057m
1+000 TO 2+000	3.957m
2+000 TO 3+000	3.857m
3+000 TO 5+850	3.757m
5+850 TO 6+000	3.600m
6+000 TO 7+000	3.500m

LIST OF DRAWINGS

DWG No.	DESCRIPTION	DWG No.	DESCRIPTION
C01	TITLE SHEET	C06	PLAN, PROFILE AND SECTIONS STA. 4+940 TO 5+220
C02	TYPICAL SECTIONS, LIST OF DRAWINGS AND DRAWING LIST	C07	PLAN, PROFILE AND SECTIONS STA. 5+220 TO 5+500
C03	SITE PLAN AND GENERAL NOTES	C08	PLAN, PROFILE AND SECTIONS STA. 5+500 TO 5+780
C04	PLAN, PROFILE AND SECTIONS STA. 4+380 TO 4+660	C09	PLAN, PROFILE AND SECTIONS STA. 5+780 TO 6+060
C05	PLAN, PROFILE AND SECTIONS STA. 4+660 TO 4+940		

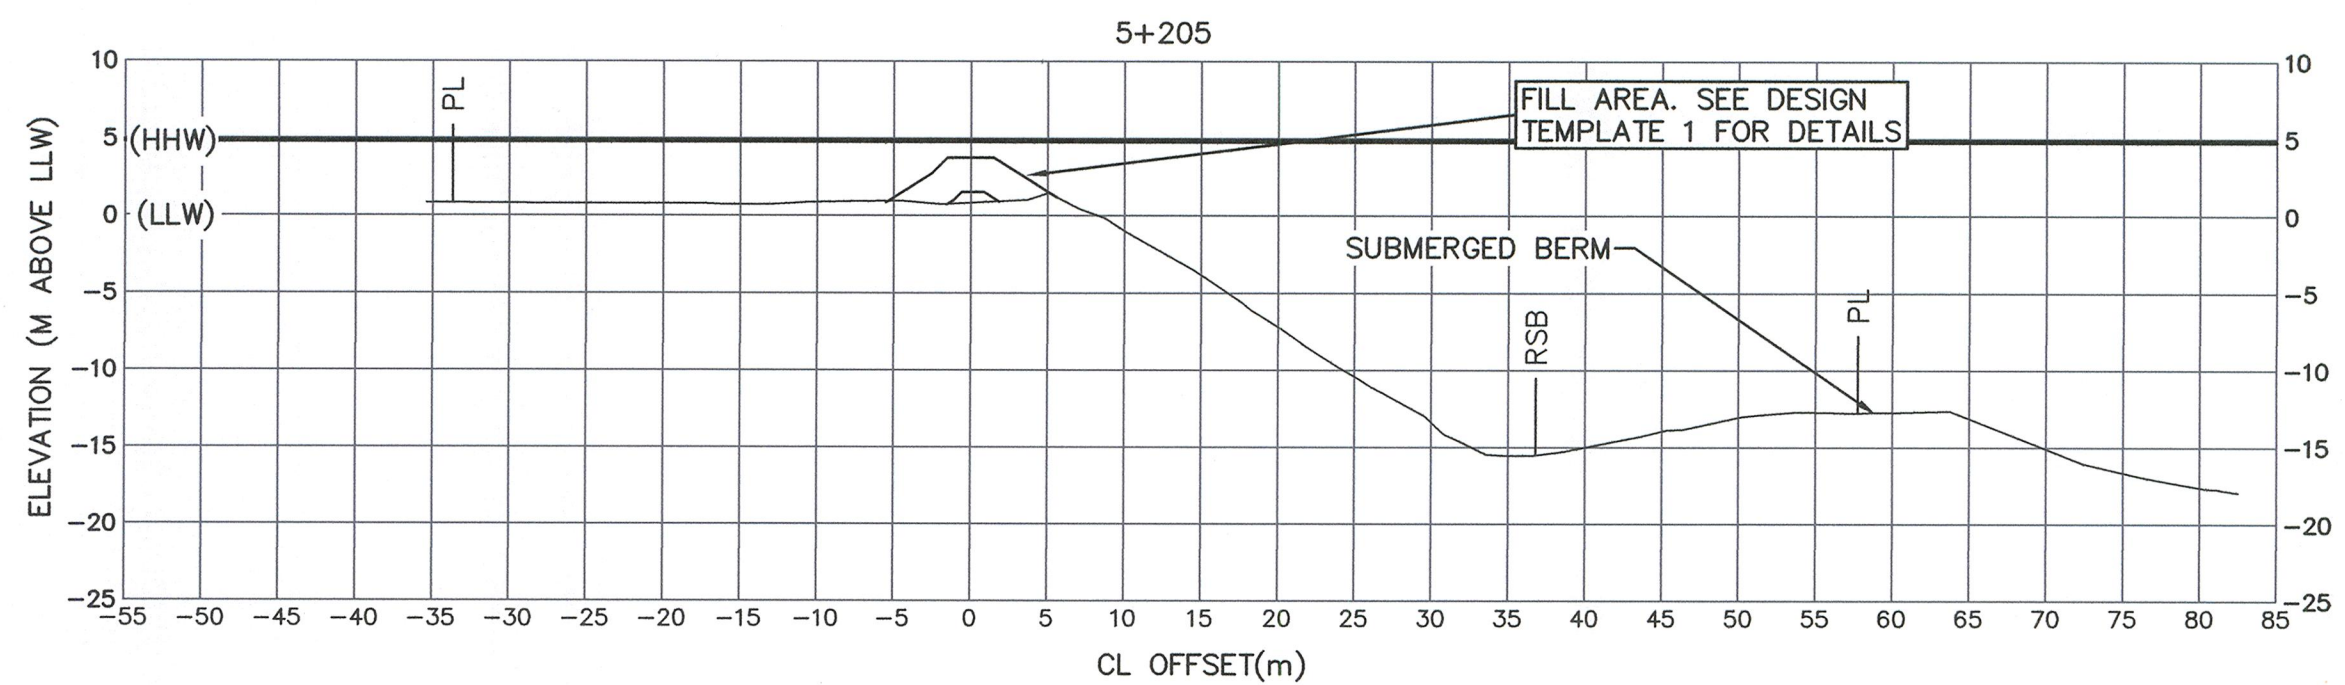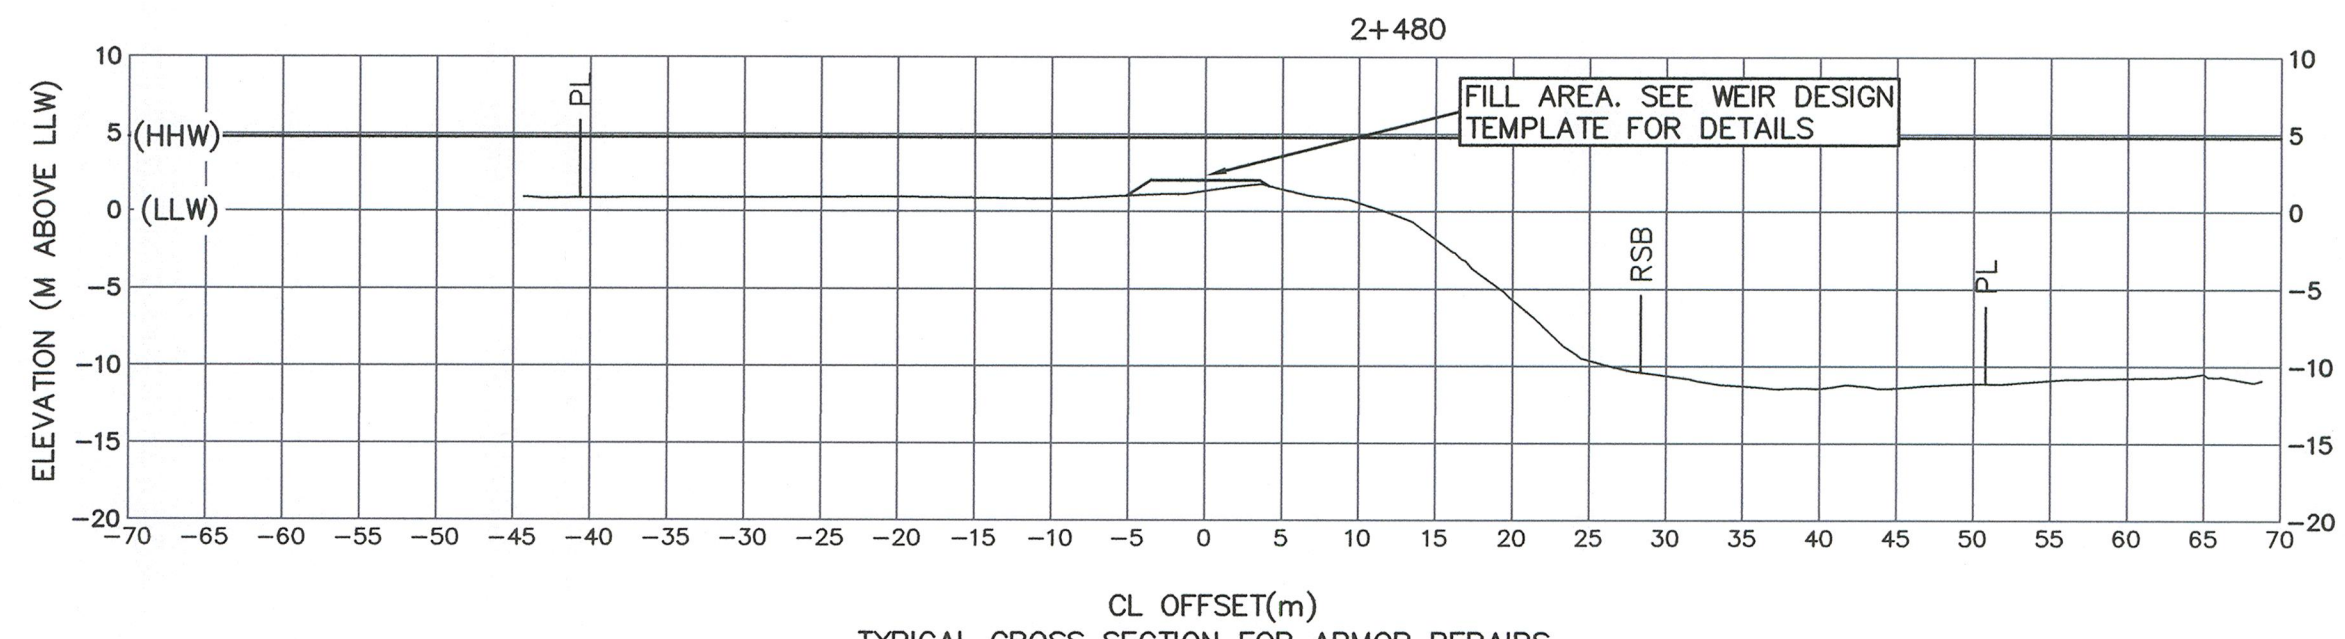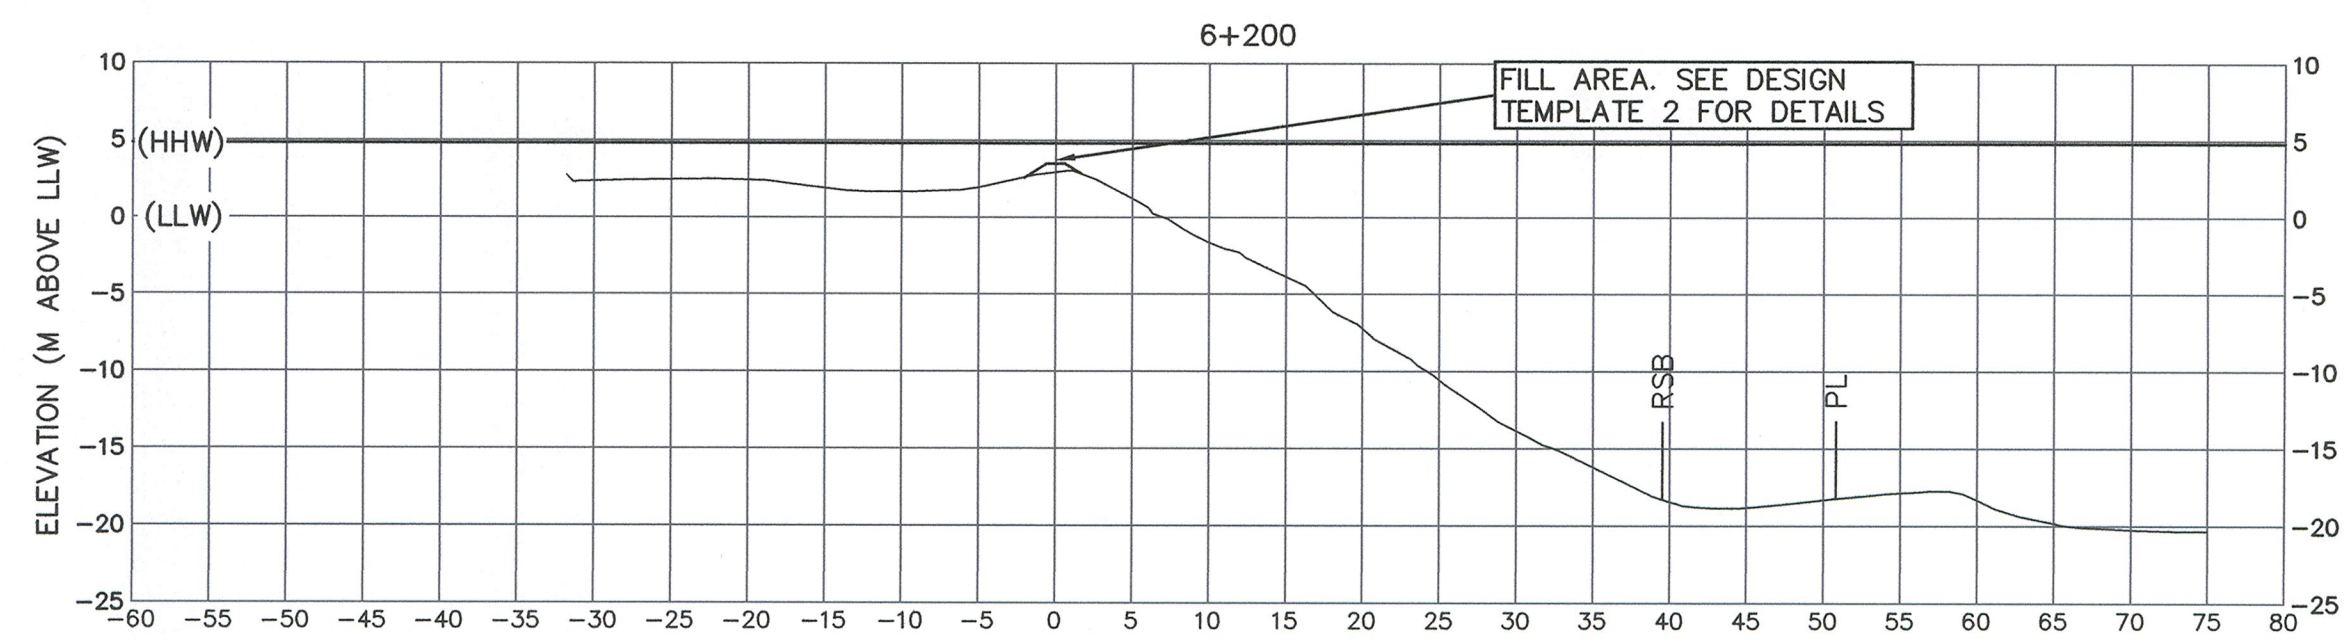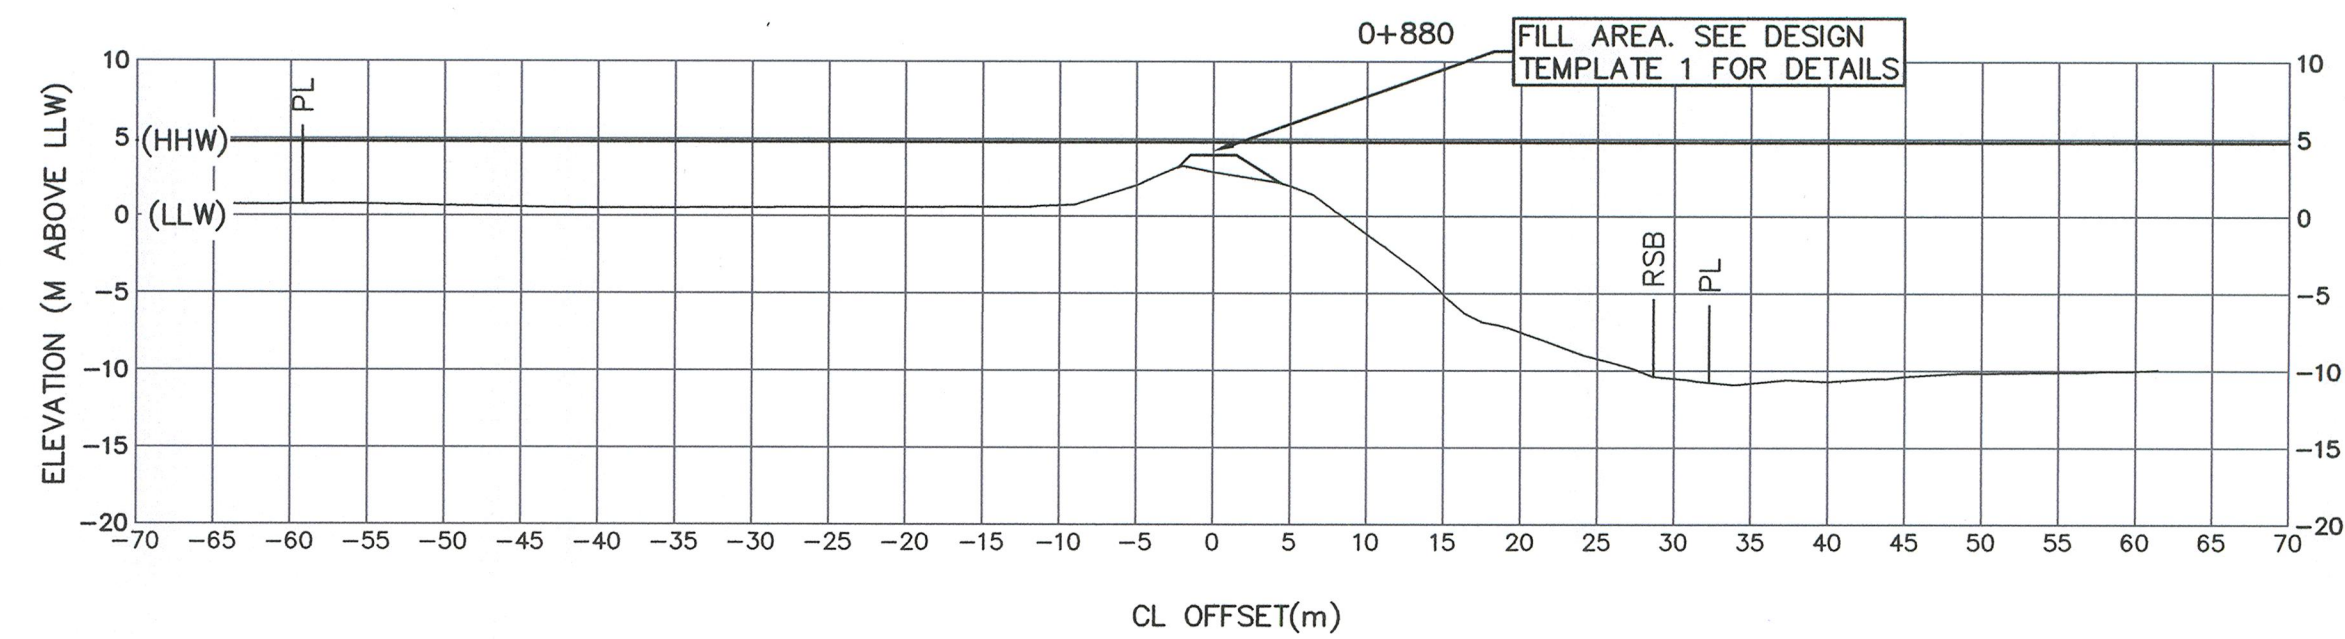

TYPICAL SECTIONS



ALL ELEVATION DATA REFERENCED TO LLWL AS ESTABLISHED BY CHS. LABELING CONVENTION IS POSITIVE UP NEGATIVE DOWN (OPPOSITE OF CHS)

Revision/Revision	Description/Description	Date/Date
5	ISSUED FOR TENDER	26SEP14
4	99% CONTRACT DOCUMENTS	22JUL14
3	ENVIRONMENTAL PERMITTING	13JUN14
2	99% REVIEW	06MAY14
1	50% REVIEW	07APR14

Department of Fisheries and Oceans Canada
Technical Support

200-401 Burrard Street
Vancouver, BC V6C 3S4

Project title/Titre du projet
Steveston North Jetty
Fraser River, BC

Rock Channel
Training Structure
Rock Repairs

Consultant Signature Only CDR
Designed by/Concept par CDR
Drawn by/Dessiné par MBR
PWOSC Project Manager/Administrateur de Projets TPSGC Jarry Chen
Regional Manager, Architectural and Engineering Services Gestionnaire régionale, Services d'architecture et de génie, TPSGC
Drawing title/Titre du dessin

TYPICAL SECTIONS, DESIGN
TEMPLATES AND DRAWING LIST

Project No./No. du projet	Sheet/Fauille	Revision no./La Révision no.
R.068745.001	C02 OF 9	5