

# SALT SHED EXPANSION PROJECT

---


TERRA NOVA NATIONAL PARK, NL

## LIST OF DRAWINGS:


---

PROJECT NO. TNNP 2008-08-100

- A1 - SITE PLAN
- A2 - FOUNDATION
- A3 - ELEVATIONS
- A4 - DETAILS
- A5 - DETAILS(2)
- A6 - ANCHOR BOLT LAYOUT/TEMPLATES

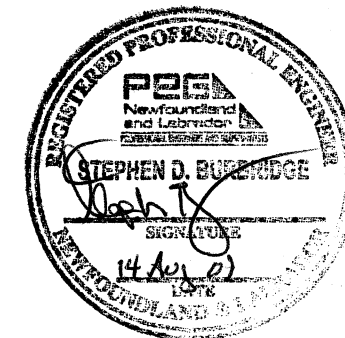


TNNP  
 GENERAL DELIVERY  
 GLOVERTOWN, NL AOG 2LO  
 Tel: (709) 533-3136

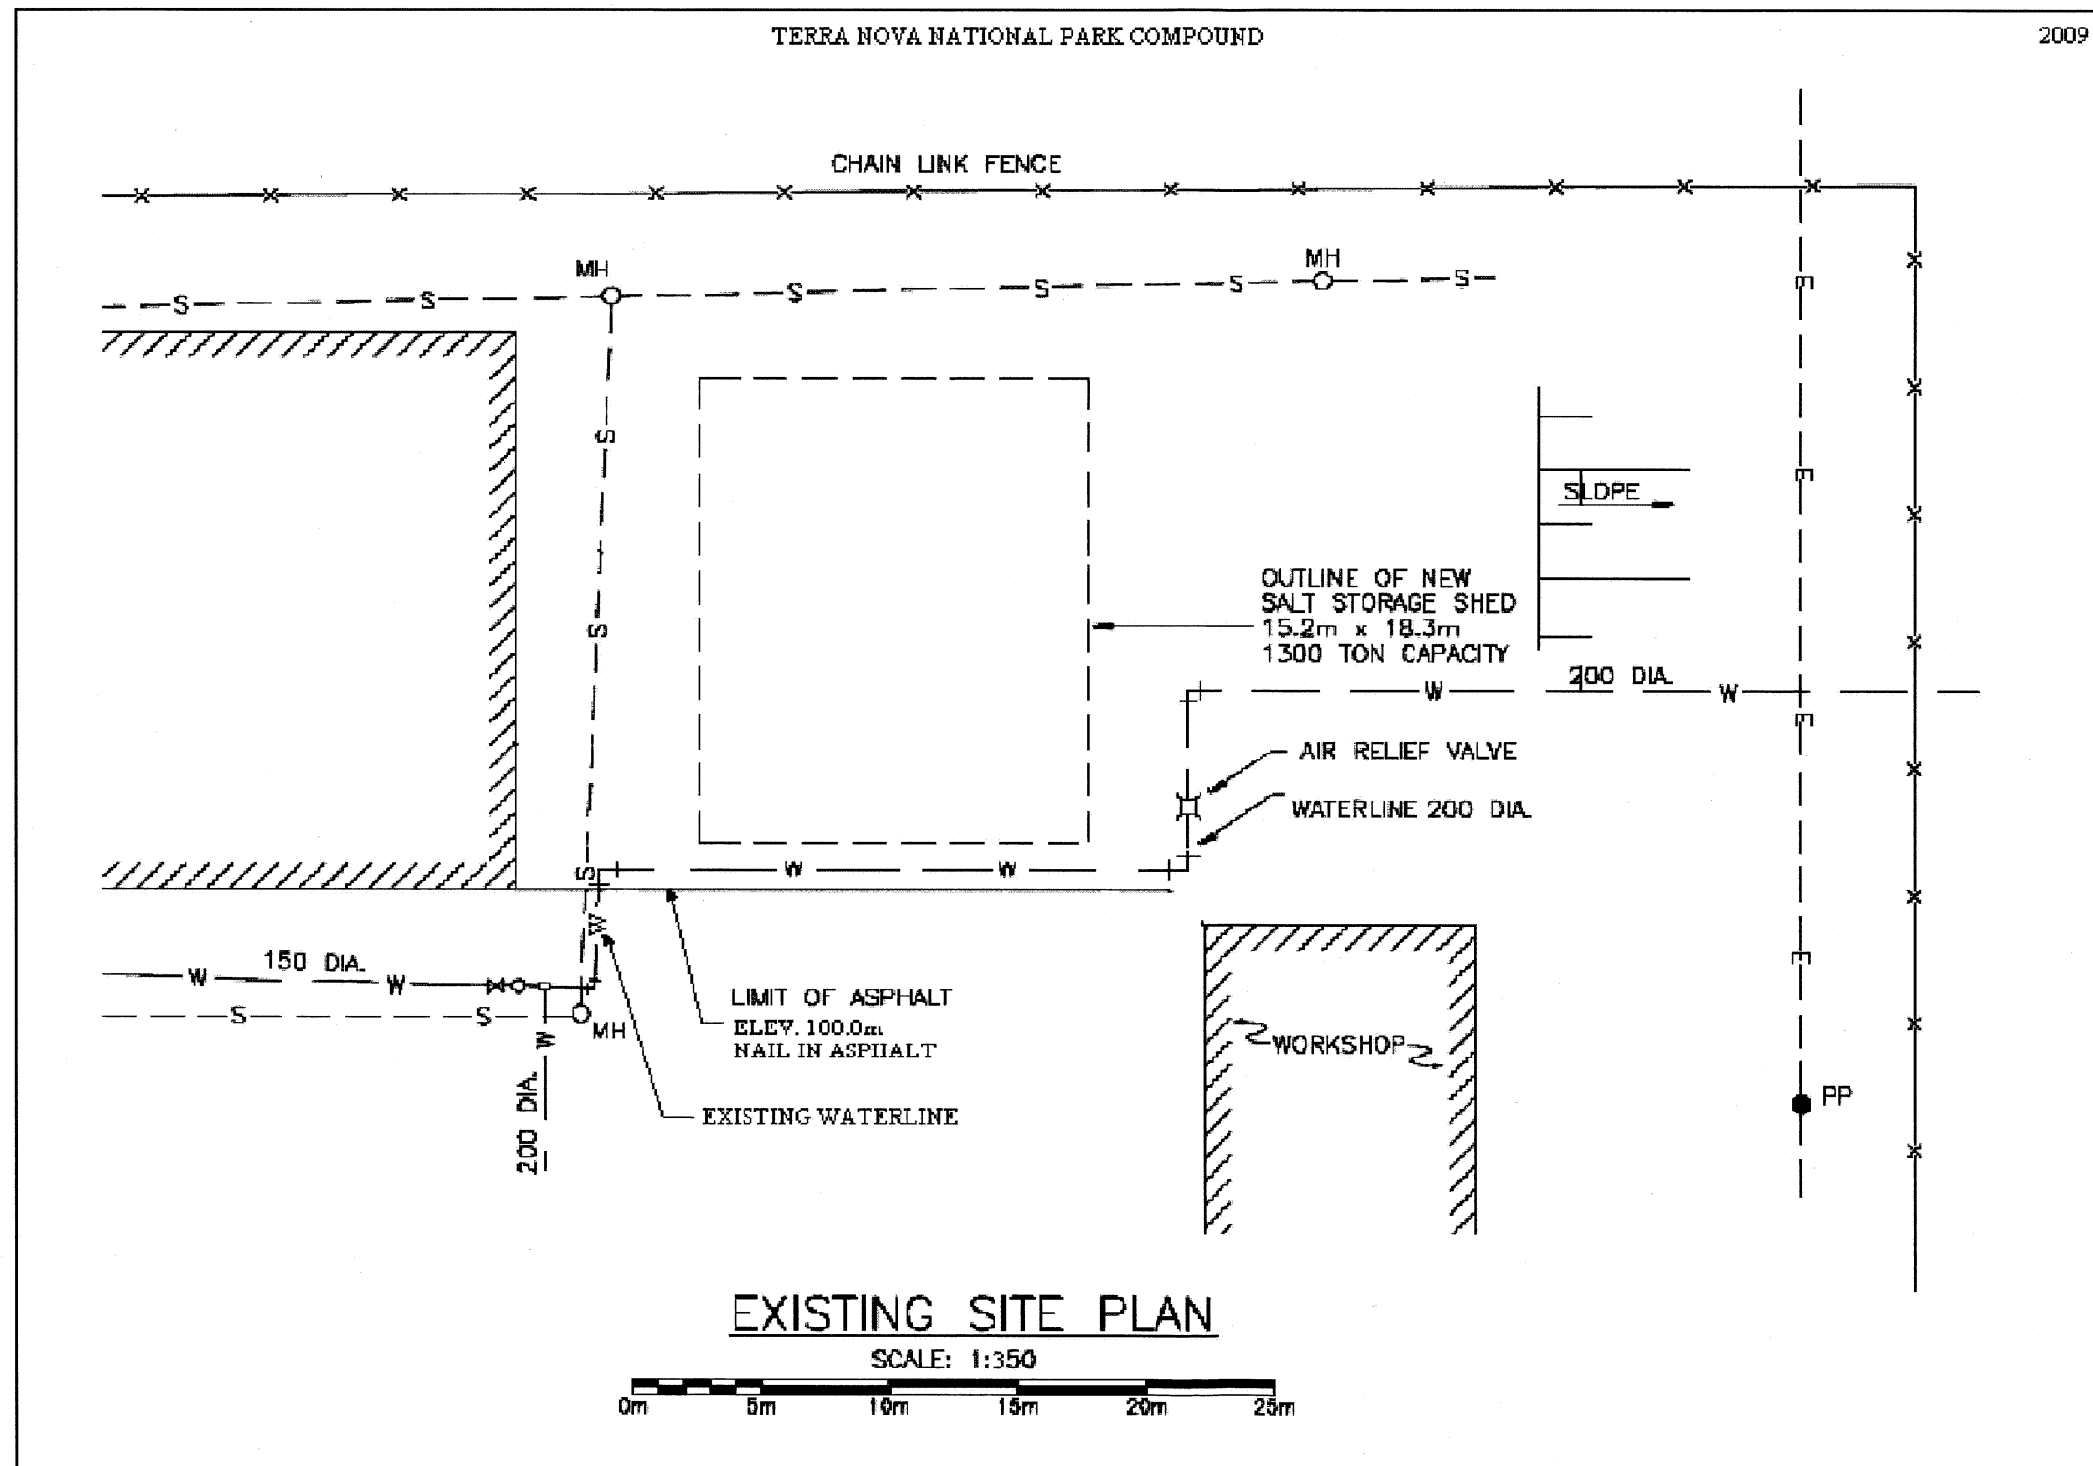

NOTES:

1. CONTRACTOR MUST VERIFY DIMENSIONS BEFORE PROCEEDING WITH THIS WORK.
2. ALL DIMENSIONS ARE IN FT./IN. UNLESS OTHERWISE SPECIFIED.
3. DO NOT SCALE DRAWINGS.
4. ALL CONCRETE WORK (INCLUDING DESIGN AND TESTING) TO CONFORM TO THE MOST RECENT EDITIONS OF THE CSA STANDARDS CAN3-A23.3, CAN3-A23.2, & CAN3-A23.1.
5. ALL CONCRETE SHALL ATTAIN MIN. 28-DAY COMPRESSIVE STRENGTH OF 35 MPa. EXPOSURE CLASSIFICATION C1. W/O/ 0.4 CEMENT TYPE 10SF. CURE USING WET BURLAP FOR MIN. 7 DAYS.
6. ALL CONCRETE TO HAVE A MIN. 5-7% AIR INTRINMENT BY VOLUME.
7. FOOTING TO REST ON UNDISTURBED SOIL.
8. ALL WORK IN ACCORDANCE TO THE FIRE SAFETY, ELECTRICAL, PLUMBING, LOCAL AND NATIONAL BUILDING CODES OF CANADA
9. SEE GENERAL NOTES AND SPECIFICATIONS

ISSUED FOR CONSTRUCTION 12/08/2009	
NO	DATE

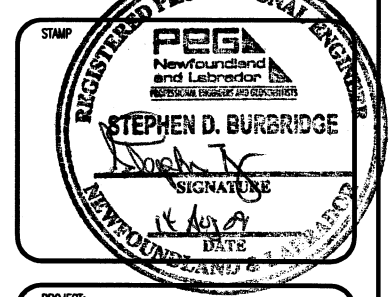

PROJECT:  
 SALT-SHED  
 TERRA NOVA  
 NATIONAL PARK

TITLE:  
 SITE PLAN

DRAWN BY: G.WELLS	APPROVED BY: S.BURBRIDGE
SCALE: NTS	DATE: AUG'09


THIS DRAWING IS PRODUCED BY TNNP AND IS NOT TO BE COPIED OR RE-DISTRIBUTED WITHOUT CONSENT.

PROJECT NO: TNNP-2009-08-100	
SHEET: A1	REVISION: 1

TNNP  
 GENERAL DELIVERY  
 GLOVERTOWN, NL A0G 2L0  
 Tel: (709) 533-3136

- NOTES:
1. CONTRACTOR MUST VERIFY DIMENSIONS BEFORE PROCEEDING WITH THIS WORK.
  2. ALL DIMENSIONS ARE IN FT./IN. UNLESS OTHERWISE SPECIFIED.
  3. DO NOT SCALE DRAWINGS.
  4. ALL CONCRETE WORK (INCLUDING DESIGN AND TESTING) TO CONFORM TO THE MOST RECENT EDITIONS OF THE CSA STANDARDS CAN3-A23.3, CAN3-A23.2, & CAN3-A23.1.
  5. ALL CONCRETE SHALL ATTAIN MIN. 28-DAY COMPRESSIVE STRENGTH OF 35 MPa. EXPOSURE CLASSIFICATION C1. W/C/ 0.4 CEMENT TYPE 10SF. CURE USING WET BURLAP FOR MIN. 7 DAYS.
  6. ALL CONCRETE TO HAVE A MIN. 5-8% AIR INTRAMMENT BY VOLUME.
  7. FOOTING TO REST ON UNDISTURBED SOIL.
  8. ALL WORK IN ACCORDANCE TO THE FIRE SAFETY, ELECTRICAL, PLUMBING, LOCAL AND NATIONAL BUILDING CODES OF CANADA.
  9. SEE GENERAL NOTES AND SPECIFICATIONS

ISSUED FOR CONSTRUCTION 12/08/2009		
NO	REVISION/ISSUE	DATE

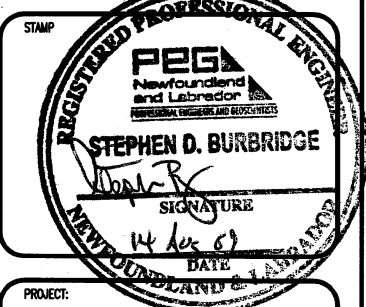

PROJECT:  
 SALT-SHED  
 TERRA NOVA  
 NATIONAL PARK


TITLE:  
 FOUNDATION

DRAWN BY: G.WELLS	APPROVED BY: S.BURBRIDGE
SCALE: 1/8"=1'0"	DATE: AUG'09




THIS DRAWING IS PRODUCED BY TRUP AND IS NOT TO BE COPIED OR RE-DISTRIBUTED WITHOUT CONSENT.

PROJECT NO: TNNP-2009-08-100	
SHEET: A2	REVISION: 1

BACK

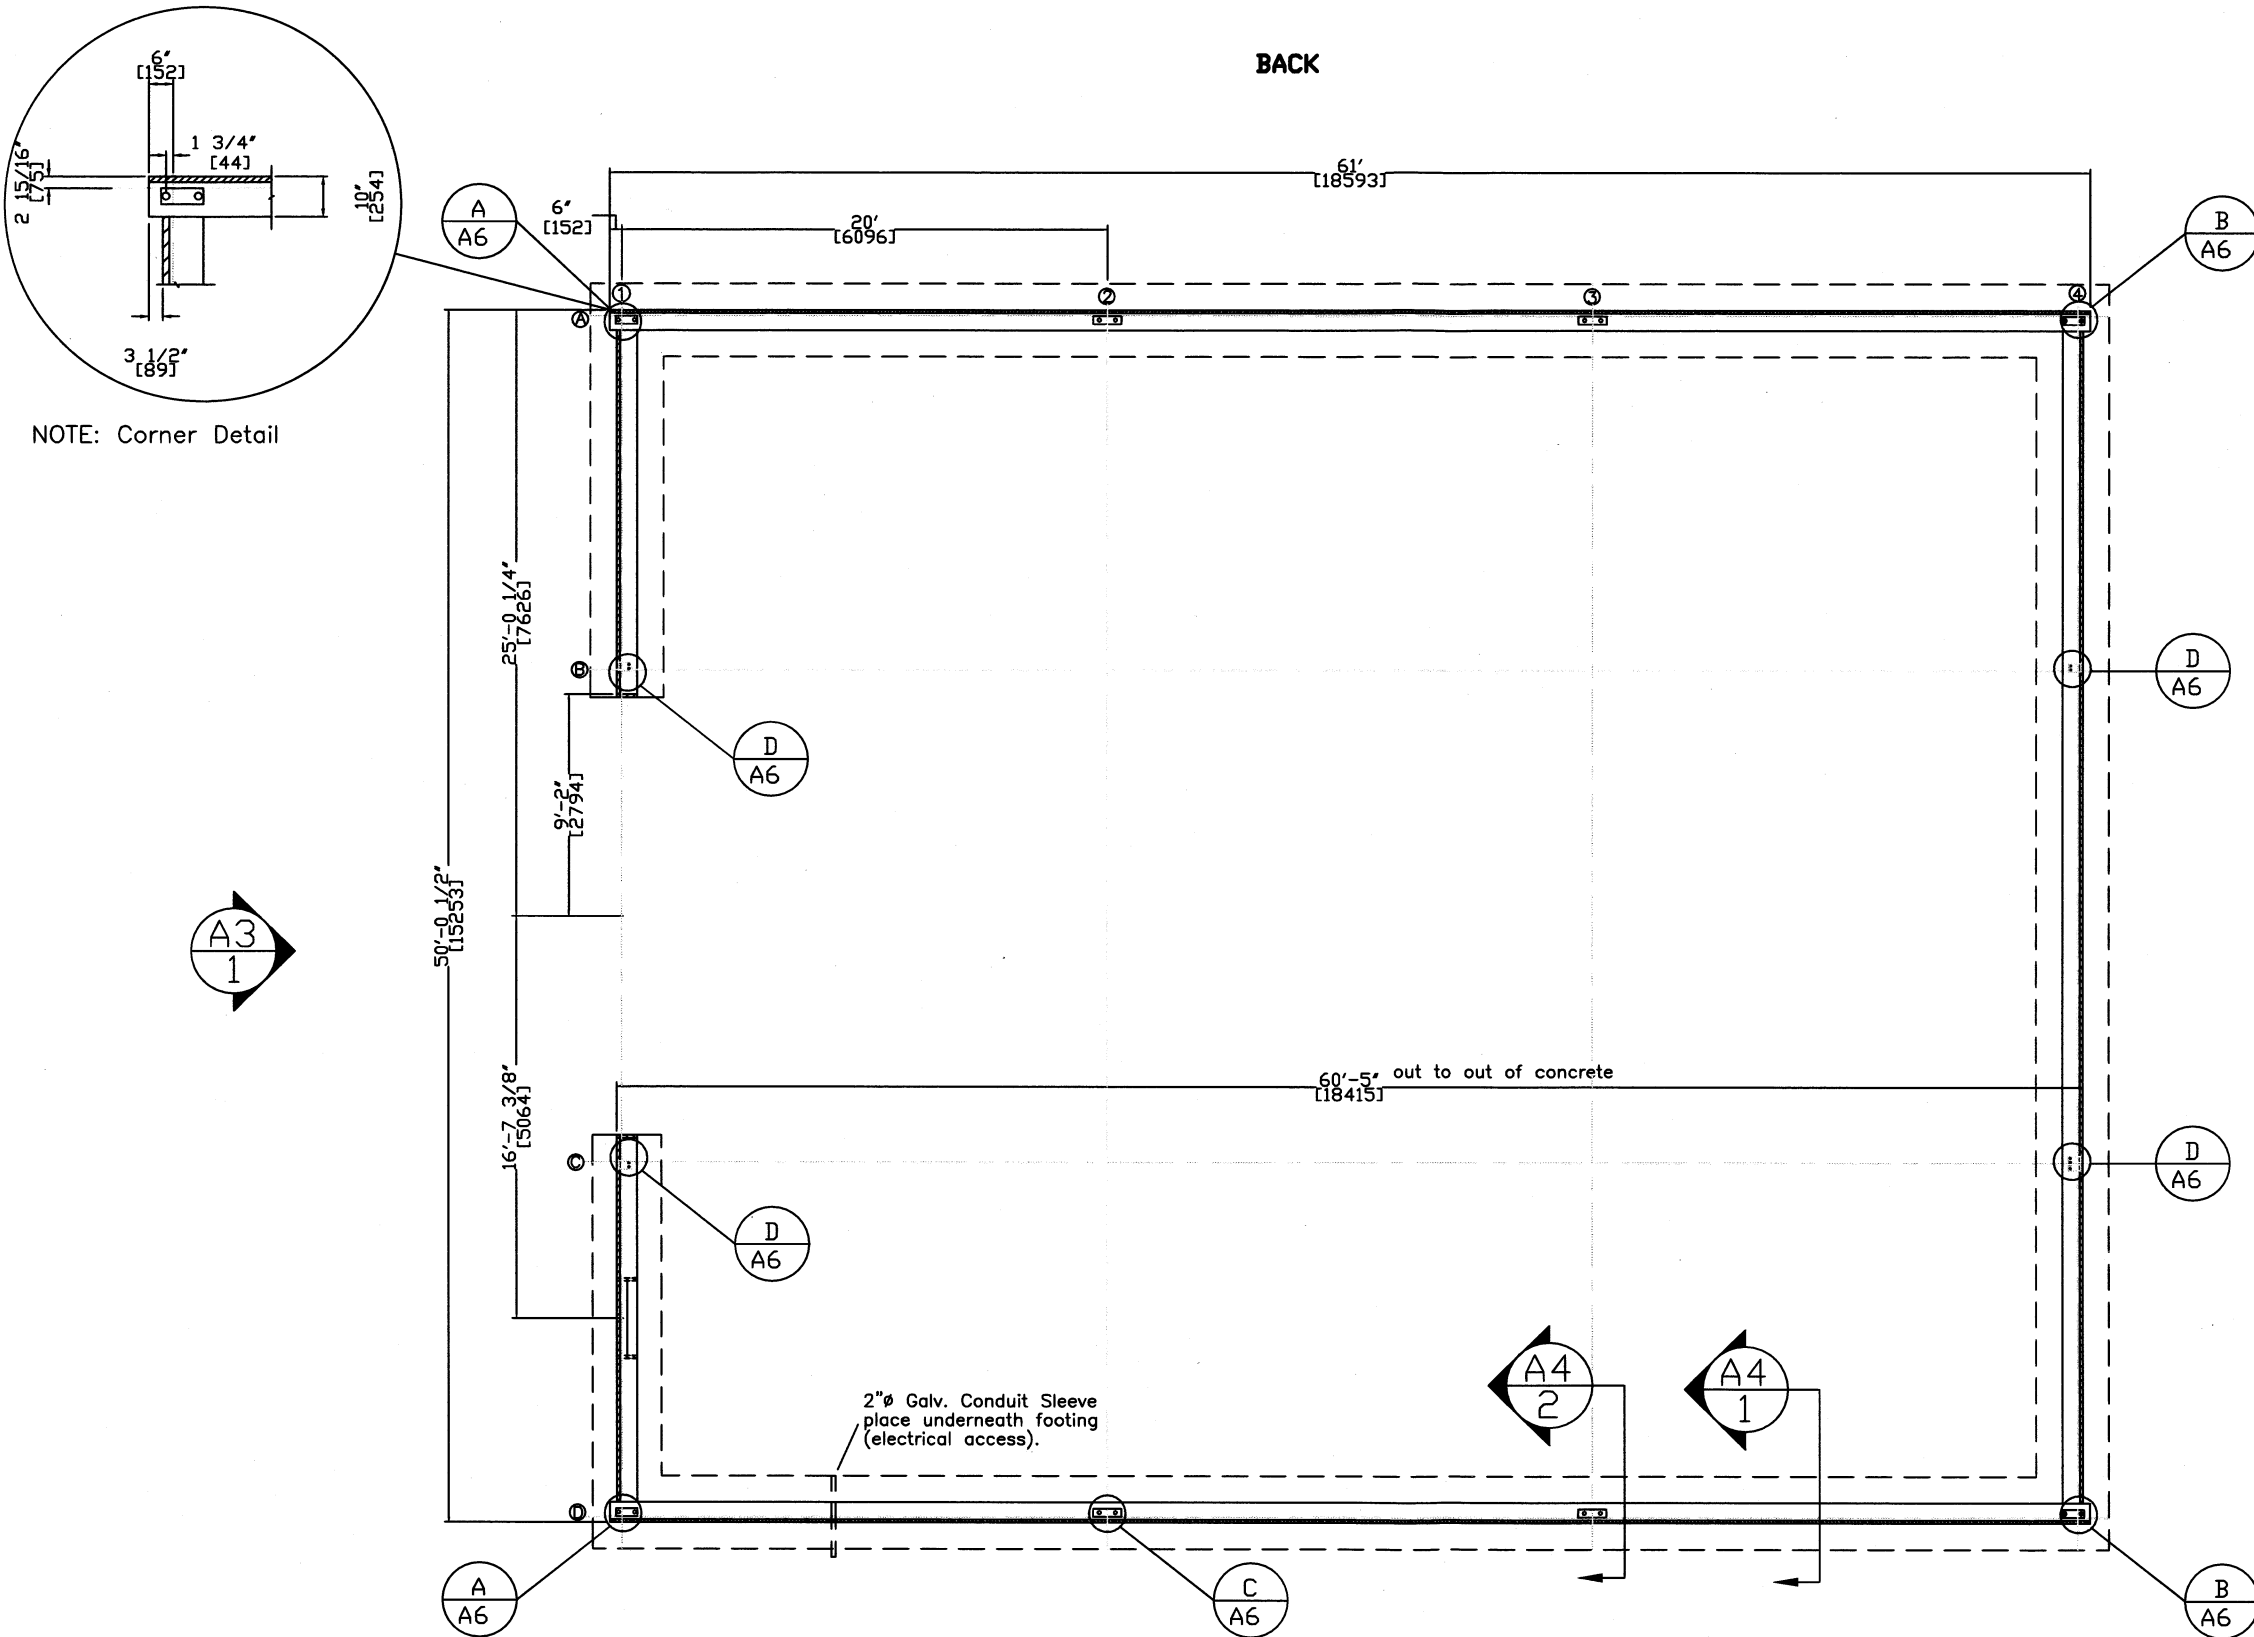

NOTE: Corner Detail



FOUNDATION PLAN

SCALE 1/8" = 1'-0"



TNNP  
 GENERAL DELIVERY  
 GLOVERTOWN, NL A0G 2L0  
 Tel: (709) 533-3136

NOTES:


1. CONTRACTOR MUST VERIFY DIMENSIONS BEFORE PROCEEDING WITH THIS WORK.
2. ALL DIMENSIONS ARE IN FT./IN. UNLESS OTHERWISE SPECIFIED.
3. DO NOT SCALE DRAWINGS.
4. ALL CONCRETE WORK (INCLUDING DESIGN AND TESTING) TO CONFORM TO THE MOST RECENT EDITIONS OF THE CSA STANDARDS CAN3-A23.3, CAN3-A23.2, & CAN3-A23.1.
5. ALL CONCRETE SHALL ATTAIN MIN. 28-DAY COMPRESSIVE STRENGTH OF 35 MPa. EXPOSURE CLASSIFICATION C1. W/C/ 0.4 CEMENT TYPE 10SF. CURE USING WET BURLAP FOR MIN. 7 DAYS.
6. ALL CONCRETE TO HAVE A MIN. 5-8% AIR INTRAPMENT BY VOLUME.
7. FOOTING TO REST ON UNDISTURBED SOIL.
8. ALL WORK IN ACCORDANCE TO THE FIRE SAFETY, ELECTRICAL, PLUMBING, LOCAL AND NATIONAL BUILDING CODES OF CANADA.
9. SEE GENERAL NOTES AND SPECIFICATIONS.
10. CONTRACTOR SUPPLIES AND DETERMINES R.S.O. TO ACCEPT 36"x84" STEEL DOOR AND FRAME. DOOR SYSTEM TO BE GROUTED IN PLACE.

ISSUED FOR CONSTRUCTION 12/08/2009

NO \_\_\_\_\_ DATE \_\_\_\_\_

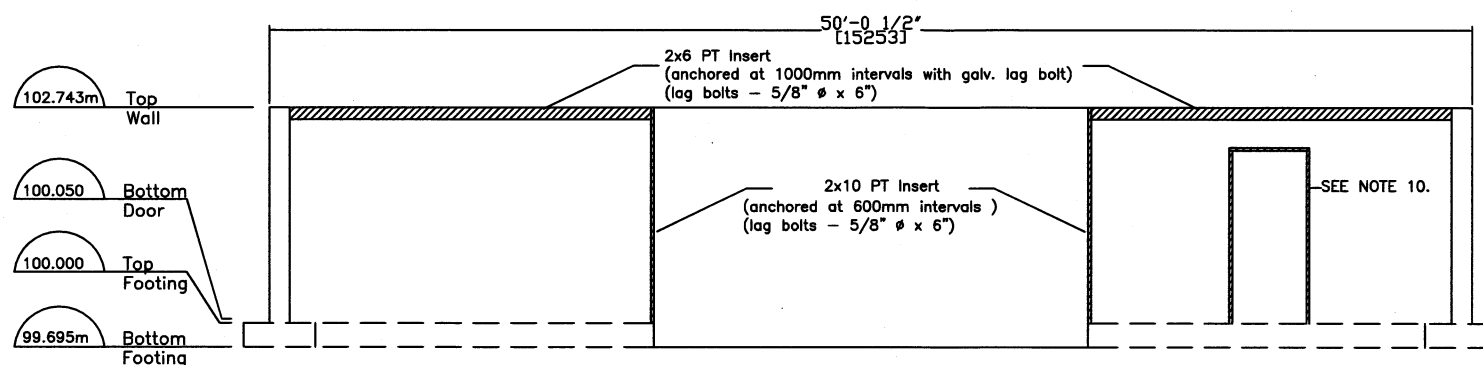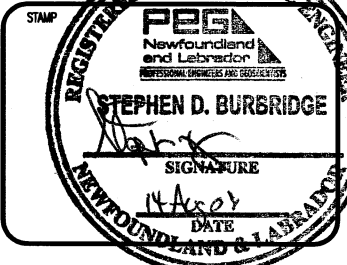

A3  
1 EAST ELEVATION  
SCALE 1/4" = 1'-0"

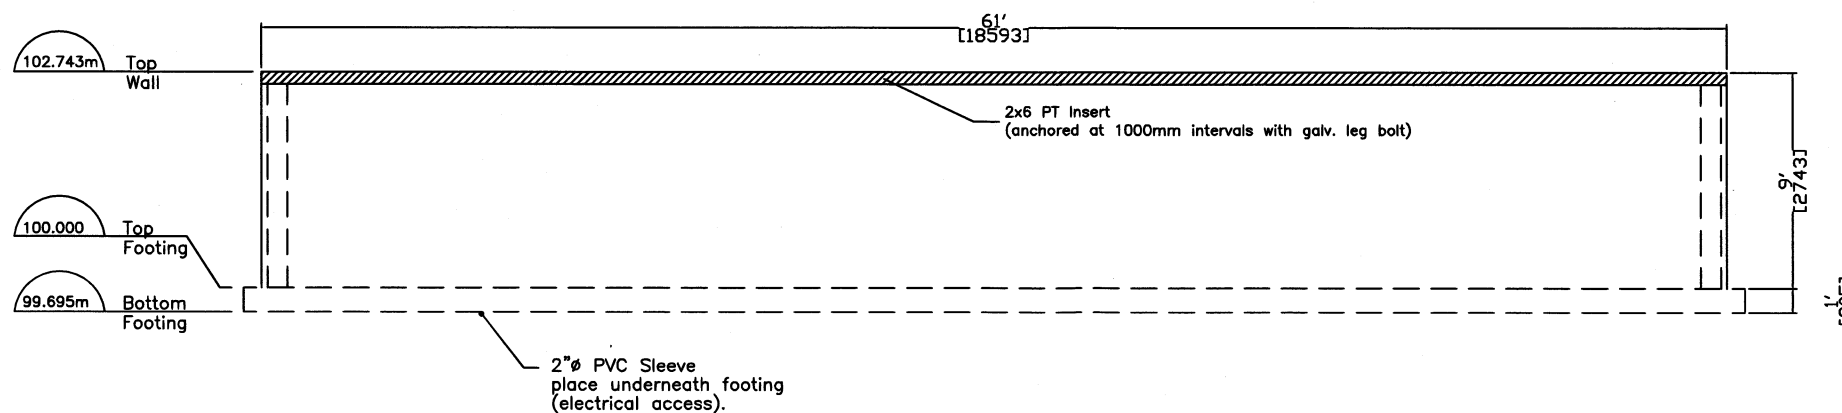

A3  
2 SOUTH ELEVATION  
SCALE 1/8" = 1'-0"

PROJECT:

SALT-SHED  
 TERRA NOVA  
 NATIONAL PARK

TITLE:

ELEVATIONS

DRAWN BY: G.WELLS	APPROVED BY: S.BURBRIDGE
SCALE: 1/8" = 1'0"	DATE: AUG'09

THIS DRAWING IS PRODUCED BY TNNP AND IS NOT TO BE COPIED OR RE-DISTRIBUTED WITHOUT CONSENT.


PROJECT NO: TNNP-2009-08-100

SHEET: A3 REVISION: 1

**TNNP**  
 GENERAL DELIVERY  
 GLOVERTOWN, NL A0G 2L0  
 Tel: (709) 533-3136

- NOTES:
1. CONTRACTOR MUST VERIFY DIMENSIONS BEFORE PROCEEDING WITH THIS WORK.
  2. ALL DIMENSIONS ARE IN FT./IN. UNLESS OTHERWISE SPECIFIED.
  3. DO NOT SCALE DRAWINGS.
  4. ALL CONCRETE WORK (INCLUDING DESIGN AND TESTING) TO CONFORM TO THE MOST RECENT EDITIONS OF THE CSA STANDARDS CAN3-A23.3, CAN3-A23.2, & CAN3-A23.1.
  5. ALL CONCRETE SHALL ATTAIN MIN. 28-DAY COMPRESSIVE STRENGTH OF 35 MPa. EXPOSURE CLASSIFICATION: C1. W/2/ 0.4 CEMENT TYPE 10SF. CURE USING WET BURLAP FOR MIN. 7 DAYS.
  6. ALL CONCRETE TO HAVE A MIN. 5-8% AIR INTRINMENT BY VOLUME.
  7. FOOTING TO REST ON UNDISTURBED SOIL.
  8. SEE GENERAL NOTES AND SPECIFICATIONS.
  9. ALL REINFORCING STEEL WILL BE GRADE 400.
  10. SEE SHEET A5 FOR WATERPROOFING.

ISSUED FOR CONSTRUCTION	12/08/2009
NO.	
DATE	

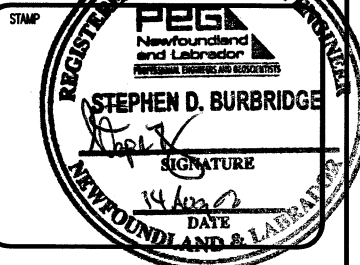

PROJECT:  
 SALT-SHED  
 TERRA NOVA  
 NATIONAL PARK


TITLE:  
 DETAILS

DRAWN BY: G. WELLS	APPROVED BY: S. BURBRIDGE
SCALE: 1/2" = 1'-0"	DATE: AUG'09


THIS DRAWING IS PRODUCED BY TNNP AND IS NOT BE COPIED OR RE-DISTRIBUTED WITHOUT CONSENT.

PROJECT NO: TNNP-2009-08-100	
SHEET: A4	REVISION: 2


Note: B5 & B9 WILL BE CONTINUOUS AT CORNERS. USE 24"X24" CORNER BARS.

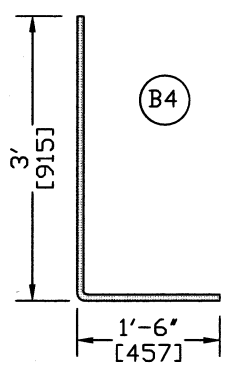


**A4**  
**3** REBAR DOWEL (Vert.)  
 SCALE: 1/2 = 1'-0"

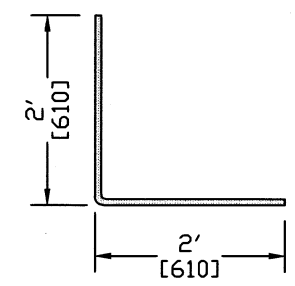


**A4**  
**4** CORNER REBAR (Horiz.)  
 SCALE: 1/2 = 1'-0"

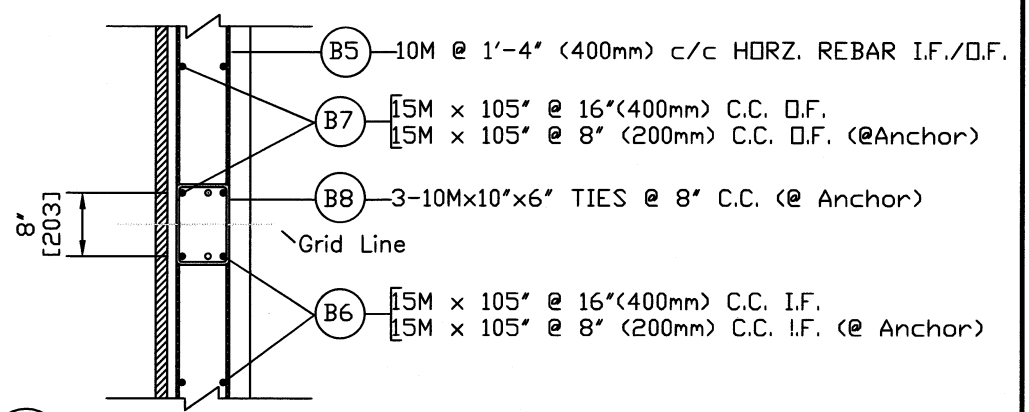


**A4**  
**4** PLAN VIEW AT ACHORS POINTS  
 SCALE: 1/2 = 1'-0"

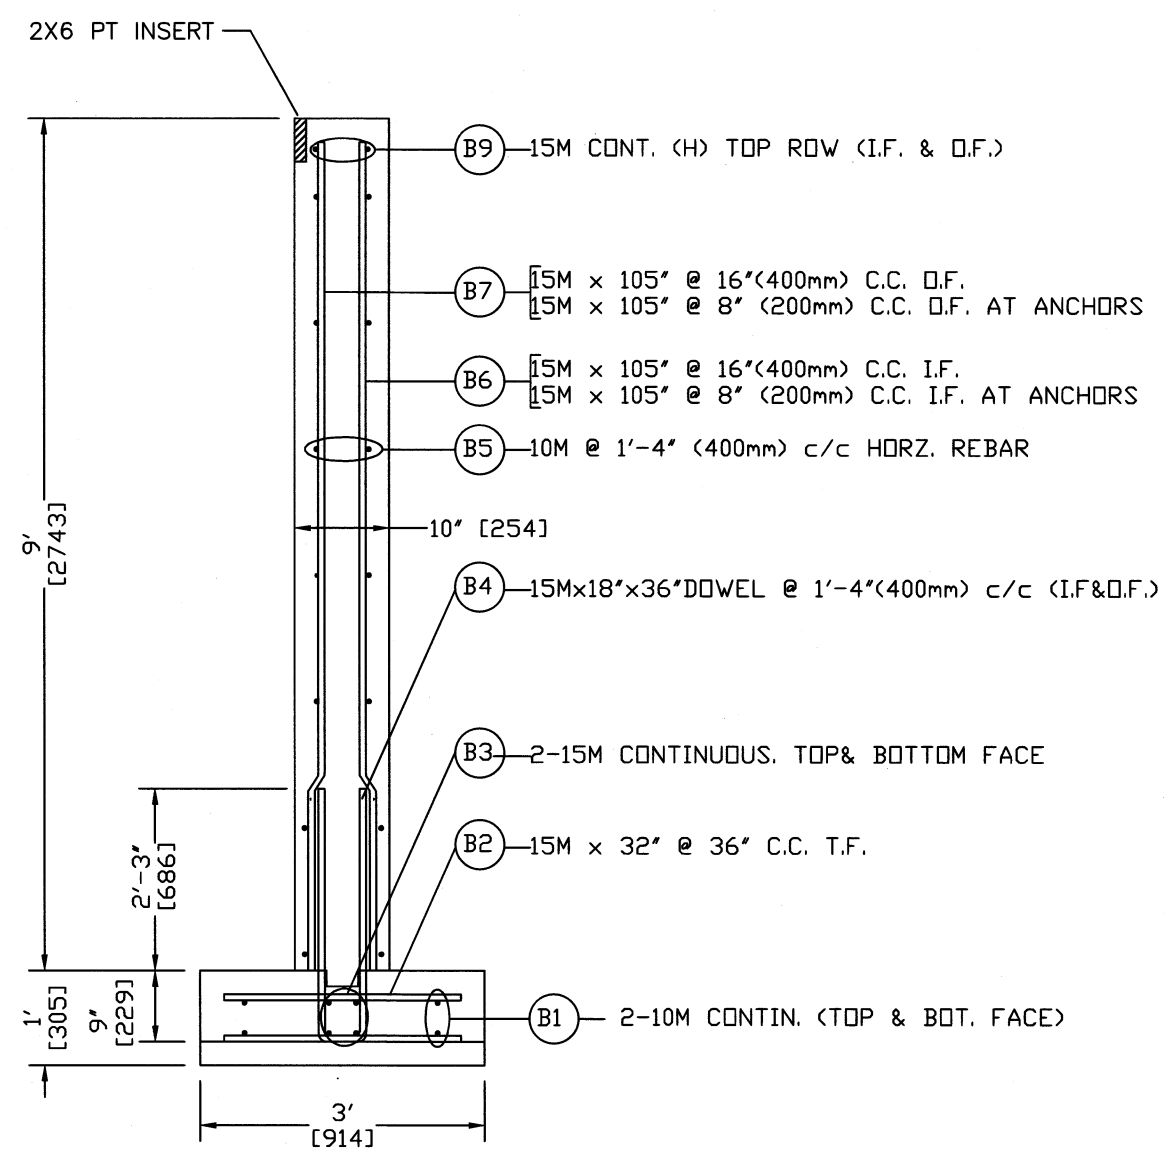

**A4**  
**1** FOUNDATION WALL AT ARCH/ANCHOR  
 SCALE: 1/2 = 1'-0"

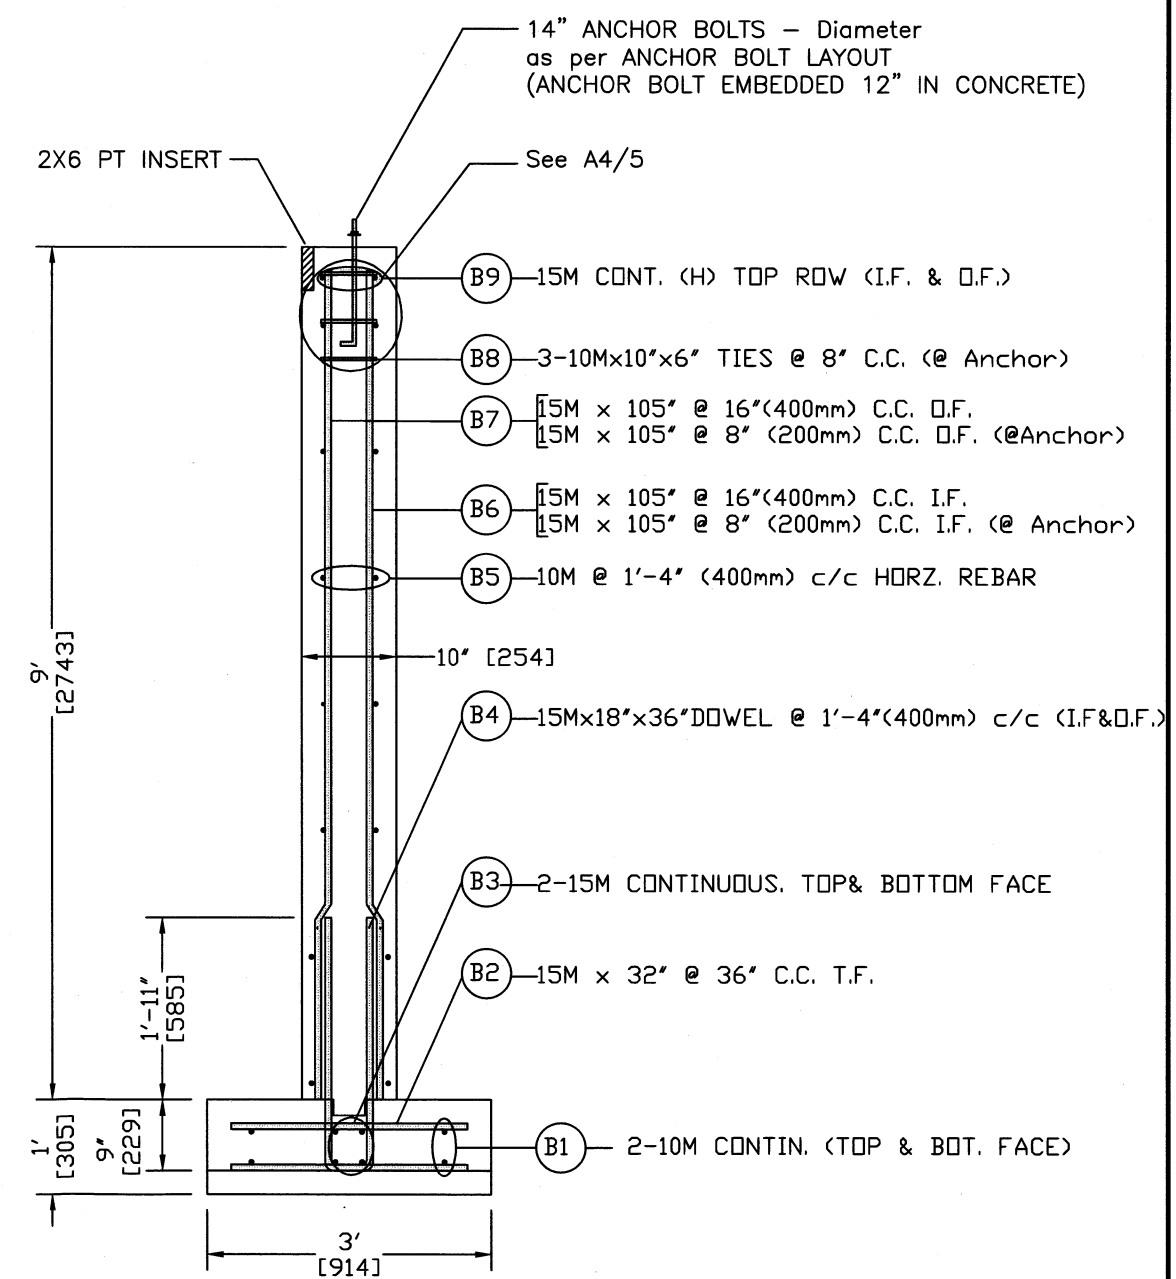


**A4**  
**2** FOUNDATION WALL AT ANCHOR POINTS  
 SCALE: 1/2 = 1'-0"

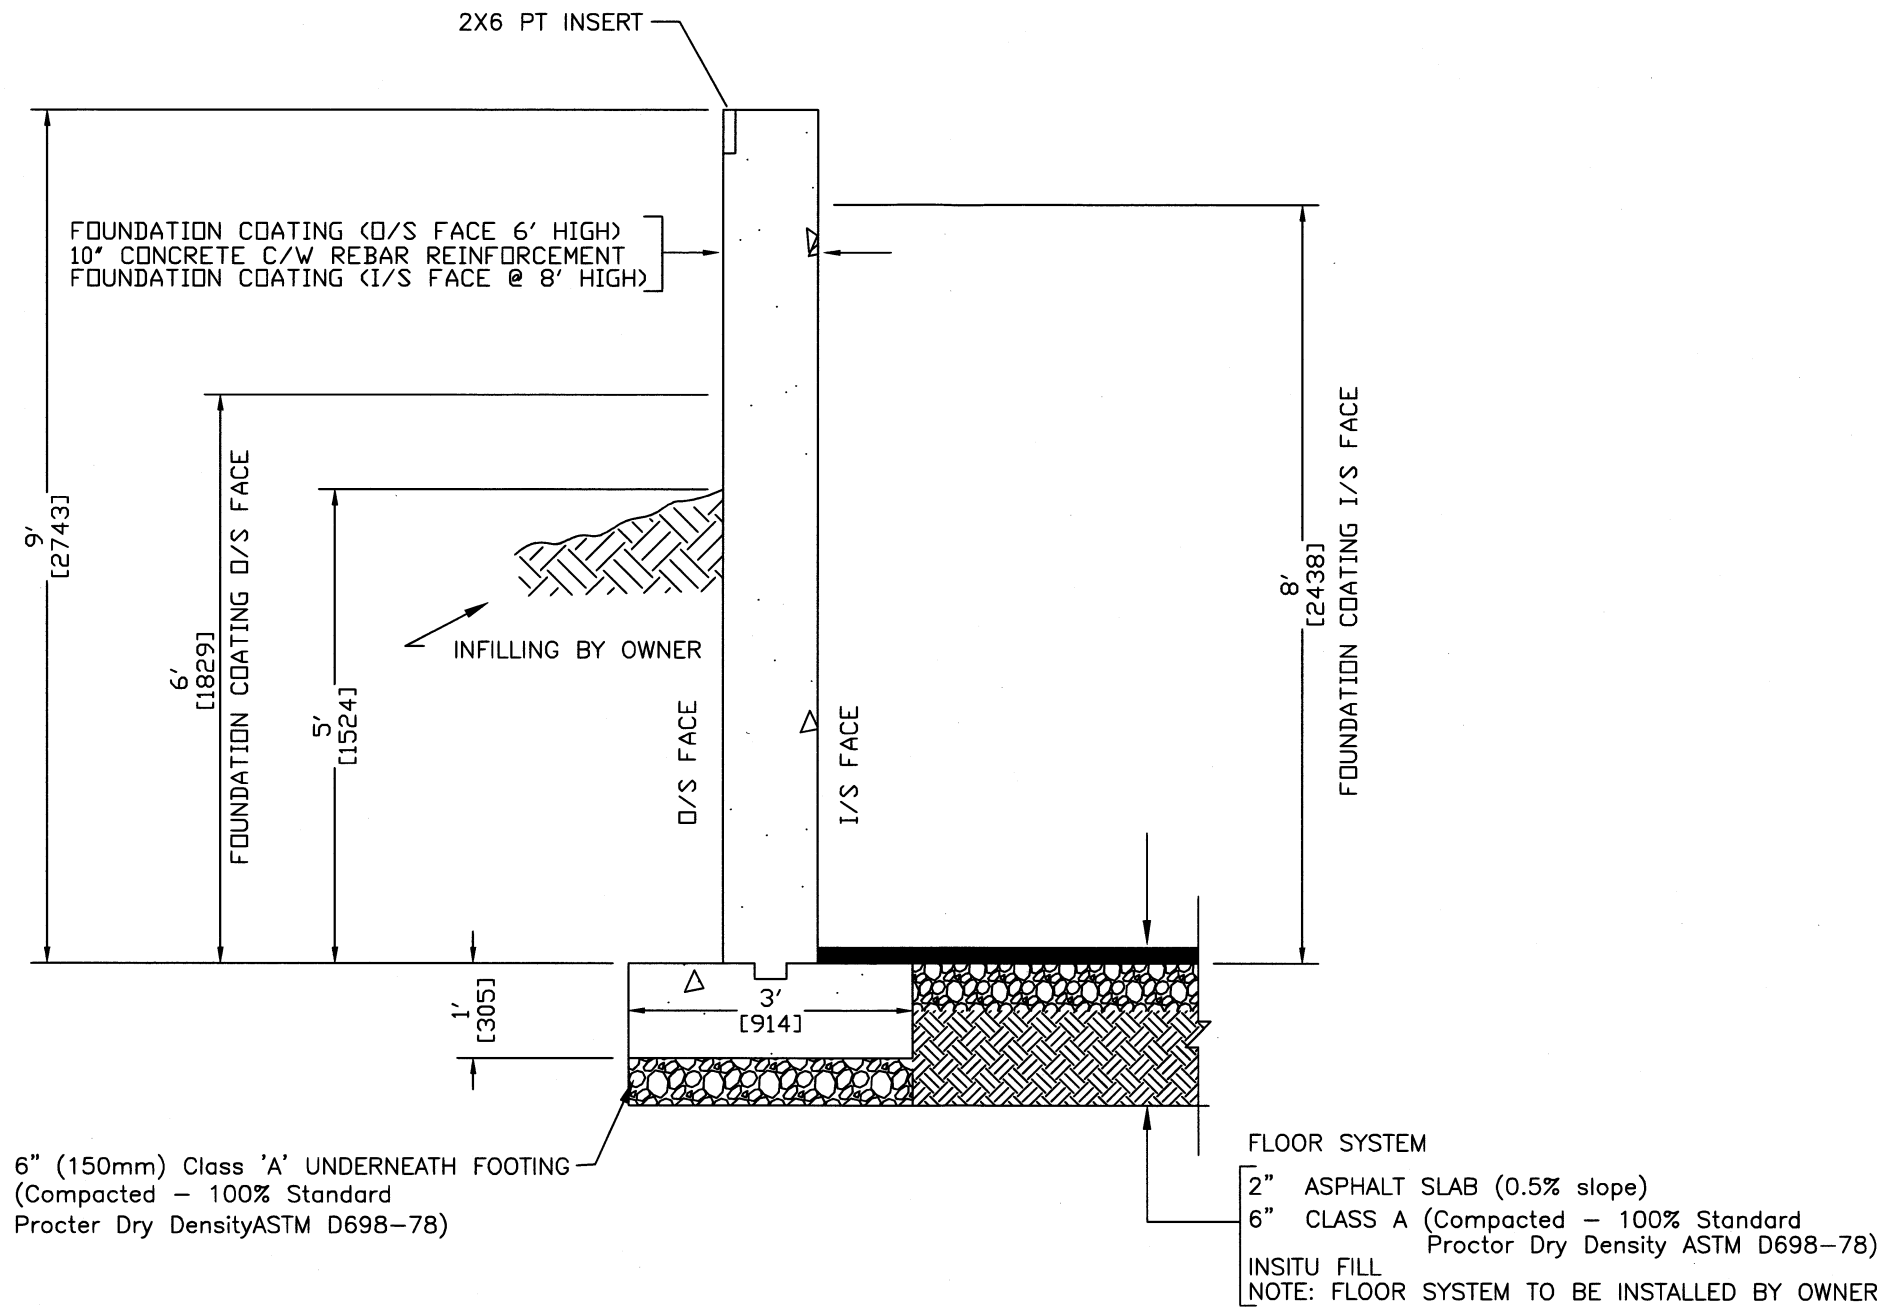

NOTES:

1. CONTRACTOR MUST VERIFY DIMENSIONS BEFORE PROCEEDING WITH THIS WORK.
2. ALL DIMENSIONS ARE IN FT./IN. UNLESS OTHERWISE SPECIFIED.
3. DO NOT SCALE DRAWINGS.
4. ALL CONCRETE WORK (INCLUDING DESIGN AND TESTING) TO CONFORM TO THE MOST RECENT EDITIONS OF THE CSA STANDARDS CAN3-A23.3, CAN3-A23.2, & CAN3-A23.1.
5. ALL CONCRETE SHALL ATTAIN MIN. 28-DAY COMPRESSIVE STRENGTH OF 35 MPa. EXPOSURE CLASSIFICATION C1. W/C/ 0.4 CEMENT TYPE 10SF. CURE USING WET BURLAP FOR MIN. 7 DAYS.
6. ALL CONCRETE TO HAVE A MIN. 5-8% AIR INTRINMENT BY VOLUME.
7. FOOTING TO REST ON UNDISTURBED SOIL.
8. SEE GENERAL NOTES AND SPECIFICATIONS.
9. ALL REINFORCING STEEL WILL BE GRADE 400.

ISSUED FOR CONSTRUCTION 12/08/2009	
NO	DATE

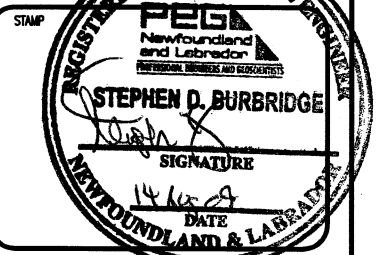

PROJECT:

SALT-SHED  
 TERRA NOVA  
 NATIONAL PARK

TITLE:

DETAILS(2)

DRAWN BY: G.WELLS	APPROVED BY: S.BURBRIDGE
SCALE: 1/2"=1'0"	DATE: AUG'09

THIS DRAWING IS PRODUCED BY TNNP  
 AND IS NOT BE COPIED OR RE-DISTRIBUTED  
 WITHOUT CONSENT.

PROJECT NO:  
TNNP-2009-08-100

SHEET: A5	REVISION: 2
--------------	----------------

A5  
1


FOUNDATIION WALL/FOOTING DETAILS (2)

SCALE: 1/2" = 1'-0"


TNNP  
 GENERAL DELIVERY  
 GLOVERTOWN, NL AOG 2L0  
 Tel: (709) 533-3136

NOTES:


- CONTRACTOR TO SUPPLY/INSTALL ANCHOR BOLTS ONLY.
- CONTRACTOR TO PROVIDE PLYWOOD TEMPLATES FOR ANCHOR BOLT PLACEMENT.
- ANCHOR BOLT DIAMETER FOR RESPECTIVE LOCATIONS AS INDICATED BY TEMPLATE.

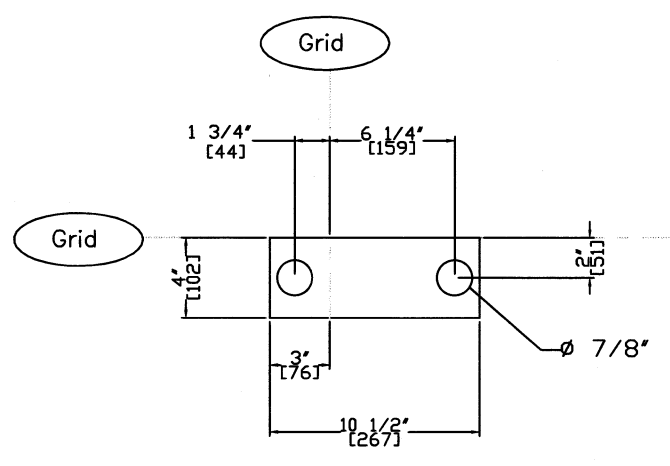


A  
A6 ANCHOR BOLT TEMPLATE

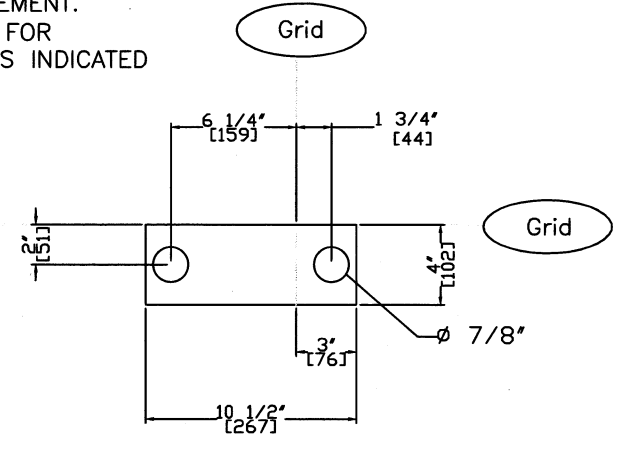

B  
A6 ANCHOR BOLT TEMPLATE

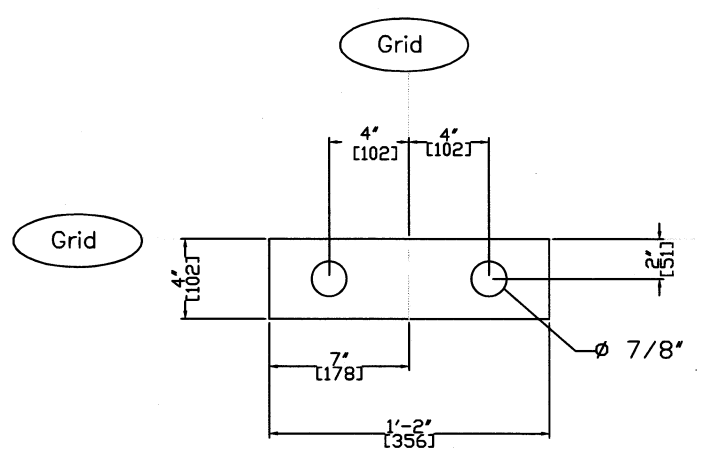

C  
A6 ANCHOR BOLT TEMPLATE

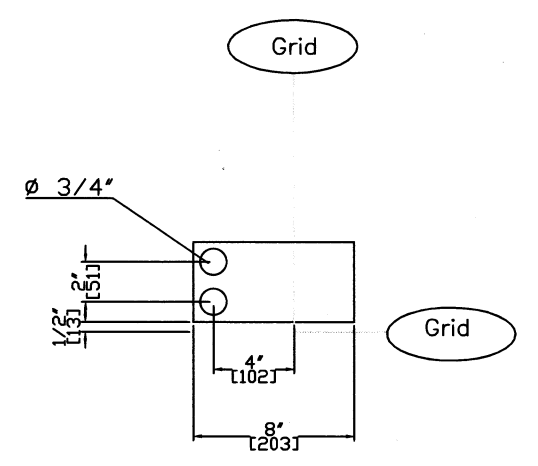


D  
A6 ANCHOR BOLT TEMPLATE

NOTES:

1. CONTRACTOR MUST VERIFY DIMENSIONS BEFORE PROCEEDING WITH THIS WORK.
2. ALL DIMENSIONS ARE IN FT./IN. UNLESS OTHERWISE SPECIFIED.
3. DO NOT SCALE DRAWINGS.
4. ALL CONCRETE WORK (INCLUDING DESIGN AND TESTING) TO CONFORM TO THE MOST RECENT EDITIONS OF THE CSA STANDARDS CAN3-A23.3, CAN3-A23.2, & CAN3-A23.1.
5. ALL CONCRETE SHALL ATTAIN MIN. 28-DAY COMPRESSIVE STRENGTH OF 35 MPa.
6. ALL CONCRETE TO HAVE A MIN. 5-8% AIR INTRAPMENT BY VOLUME.
7. FOOTING TO REST ON UNDISTURBED SOIL.
8. ALL WORK IN ACCORDANCE TO THE FIRE SAFETY, ELECTRICAL, PLUMBING, LOCAL AND NATIONAL BUILDING CODES OF CANADA.
9. SEE GENERAL NOTES AND SPECIFICATIONS.
10. ANCHOR BOLTS EMBEDDED IN CONCRETE MIN. OF 12". PROJECTING OUT OF CONCRETE MIN. 3". ANCHOR BOLT PROJECTION BASE ON NO GROUT.
11. CONTRACTOR TO SUPPLY/INSTALL ANCHOR BOLTS AND PLYWOOD TEMPLATES FOR ANCHOR BOLT PLACEMENT.

ISSUED FOR CONSTRUCTION 12/06/2009		
NO	REVISION	DATE

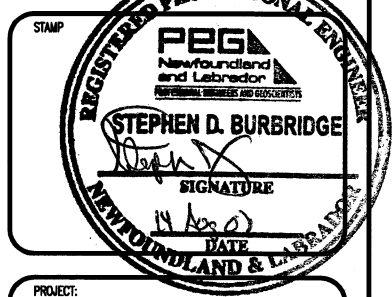

PROJECT:  
 SALT-SHED  
 TERRA NOVA  
 NATIONAL PARK

TITLE:  
 ANCHOR BOLT  
 LAYOUT/TEMPLATE

DRAWN BY: G.WELLS	APPROVED BY: S.BURBRIDGE
SCALE: N.T.S.	DATE: AUG'09

THIS DRAWING IS PRODUCED BY TNNP AND IS NOT TO BE COPIED OR RE-DISTRIBUTED WITHOUT CONSENT.

PROJECT NO: TNNP-2009-08-100	
SHEET: A6	REVISION: 1