

**LIGHTING BASE DETAIL**  
SCALE: 1:50

ALL LIGHTING MOUNTED ON BUILDING SHALL BE MOUNTED ABOVE 12' AFG UNLESS OTHERWISE NOTED OR NOT POSSIBLE. COORDINATE EXACT MOUNTING HEIGHT ON SITE.

ALL LIGHTING MOUNTED ON BUILDING SHALL BE FEED FROM EXISTING PANEL LOCATED IN CRAWL SPACE. PROVIDE NEW BREAKER IN PANEL AND FEED NEW LIGHTING USING 2C#12AC90+BNB

ALL WIRING SHALL BE CONCEALED IN AREAS THAT ARE NOT ACCESSIBLE BY INMATES. IF REQUIRED WIRING IS PERMITTED THROUGH ACCESSIBLE AREAS ONLY IF RUN IN RIGID STEEL THREADED PIPE 1", AND IS APPROVED BY DEPARTMENTAL REPRESENTATIVE.

FLOOD LIGHT AIMING LINE. CONTRACTOR SHALL TAKE THIS POINT AT GRADE LEVEL TO PROPERLY ADJUST AIMING OF FLOOD LIGHT. COORDINATE ON SITE.

NEW SOLAR POWER LIGHT FIXTURE C/W NEW POLE AND CONCRETE BASE. SEE LIGHTING BASE DETAIL.


THE CONTRACTOR SHALL REPAIR ALL LANDSCAPING WHICH IS DISTURBED BY THE INSTALLATION. THE REPAIRS SHALL BRING IT BACK TO IT'S ORIGINAL CONDITION.

EXISTING WOODEN UTILITY POLE UNLESS OTHERWISE NOTED. COORDINATE MOUNTING HEIGHT ON SITE. APPROXIMATE MOUNTING HEIGHT OF 30' AFG UNLESS OTHERWISE NOTED.

EXTEND OVERHEAD LIGHTING SECONDARY TO THESE POLES.

EXISTING OVERHEAD LIGHTING SECONDARY ALONG FENCE. CONTRACTOR SHALL INSPECT CABLING AND REUSE IF POSSIBLE.

ALL EXISTING PANELS ARE SHOWN AS APPROXIMATE LOCATION. EXACT LOCATION SHALL BE CONFIRMED ON SITE.

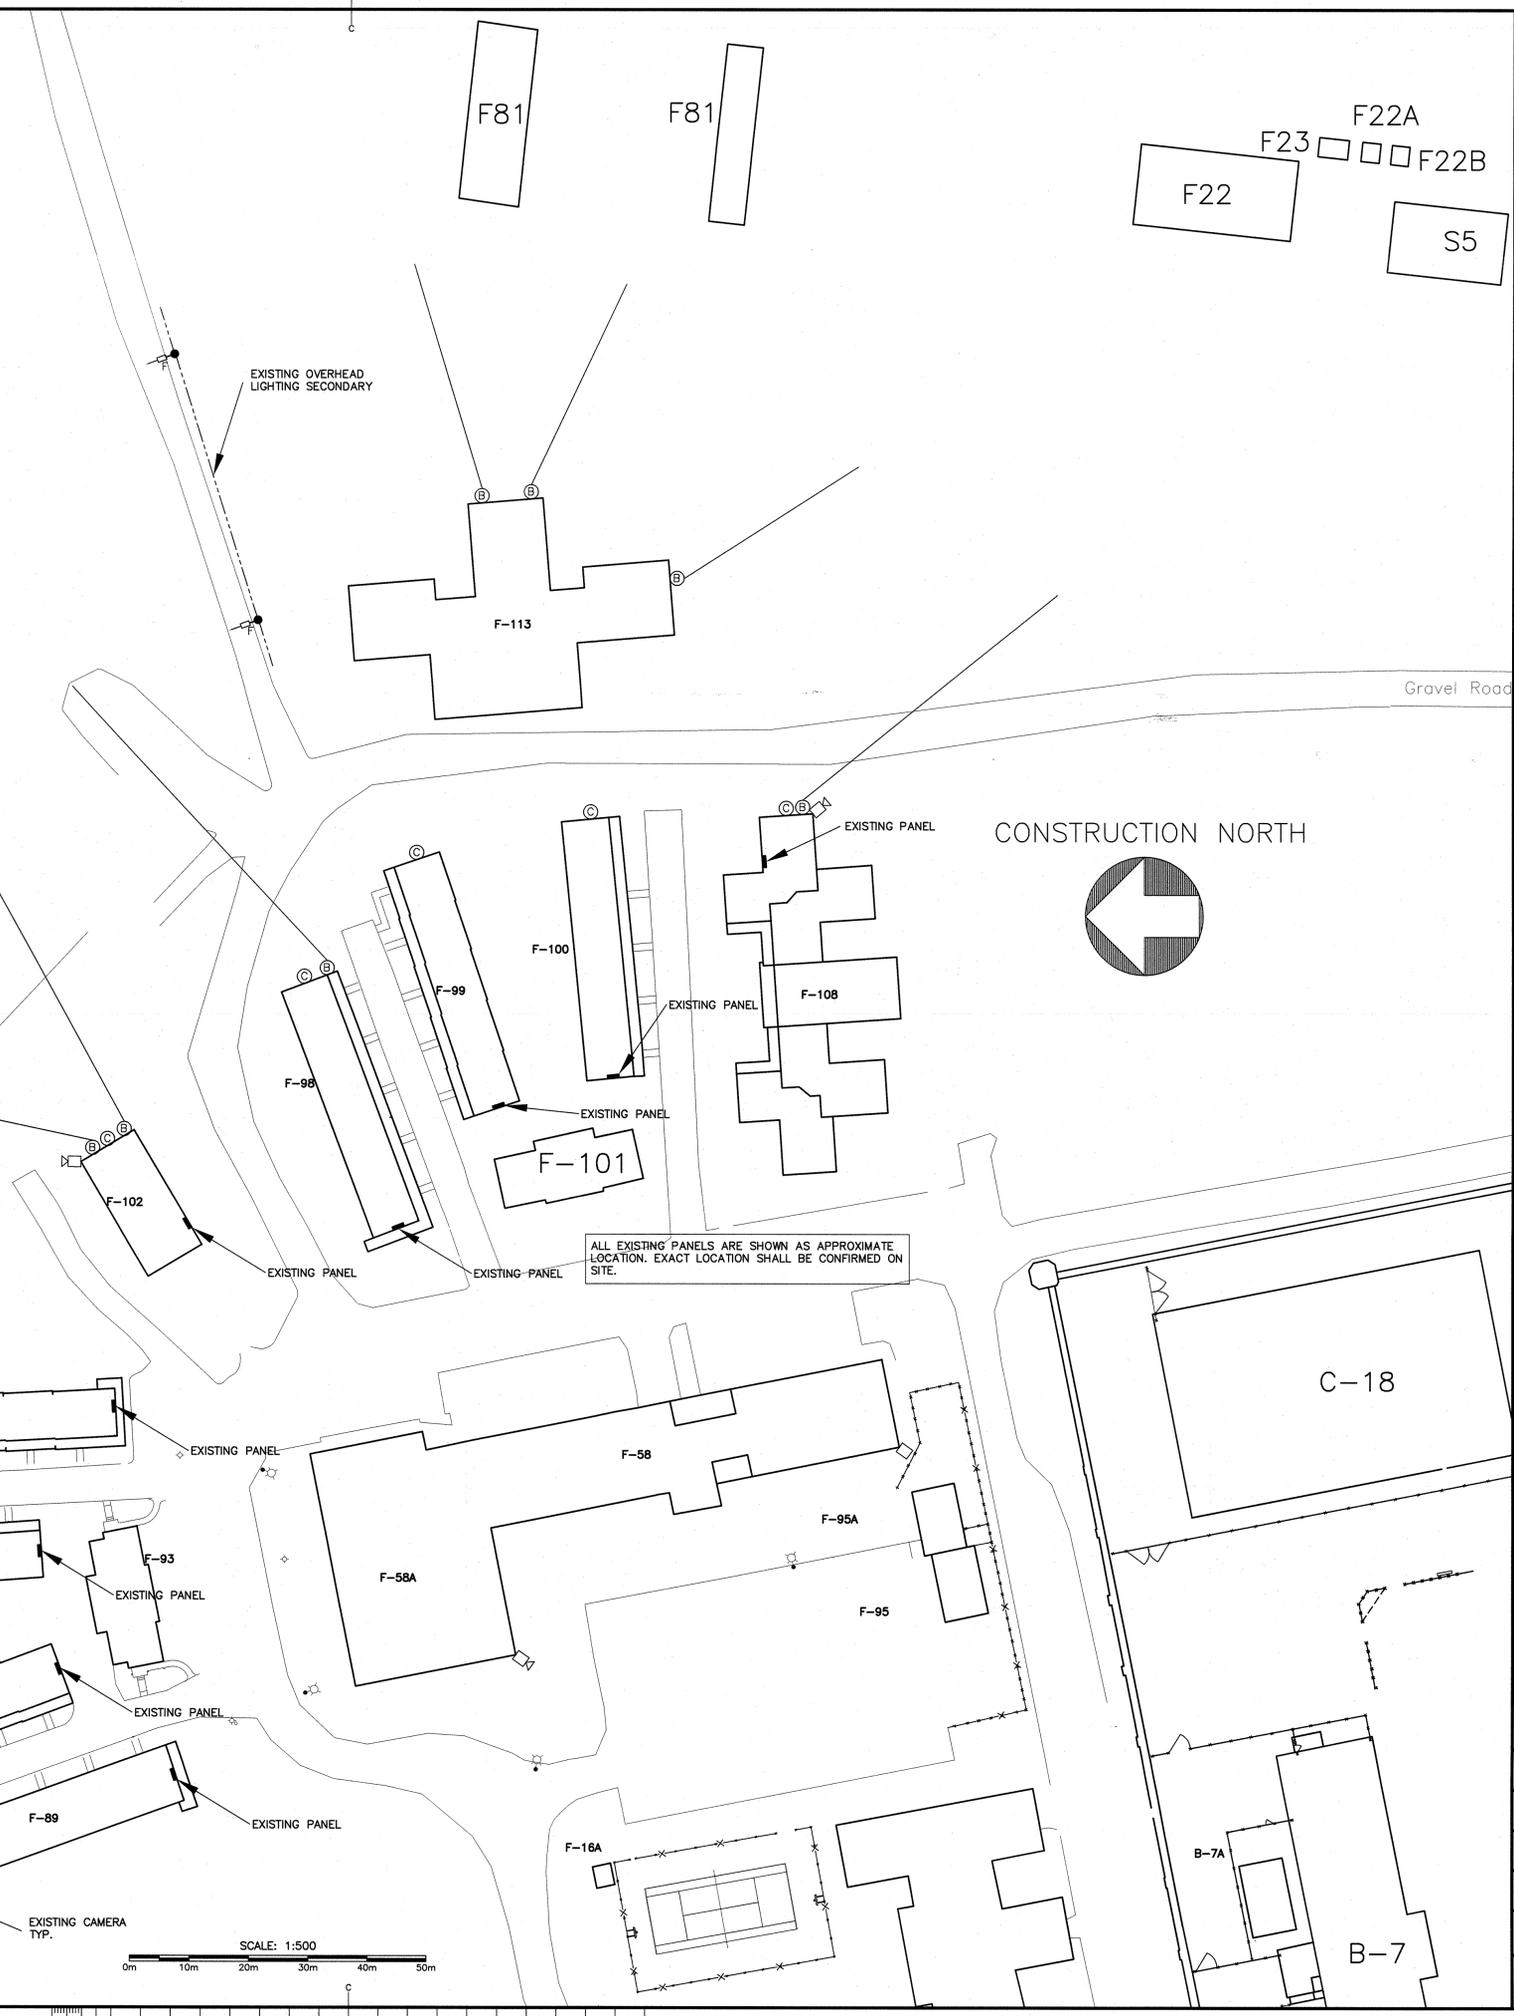

SCALE: 1:500



1	ISSUED FOR TENDER	NOV 2014
revisions		date

project  
**GROUNDS LIGHTING**  
**DORCHESTER PENITENTIARY**  
**MINIMUM SECTOR**  
WESTMORLAND COUNTY

drawing  
**PARTIAL SITE PLAN**  
desain

designed	KMR	conçu
date	JUNE 2013	
drawn	MML	dessiné
date	JUNE 14, 2013	
approved	MAL	approuvé
date	NOV 2014	

Tender  
PWGSC Project Manager  
PWGSC Project Manager

project number  
**R.061816.001**  
no. du projet

drawing no.  
**E-2**  
no. du dessin