

RETURN BIDS TO:
RETOURNER LES SOUMISSIONS À:
Bid Receiving - PWGSC / Réception des soumissions
- TPSGC
11 Laurier St. / 11, rue Laurier
Place du Portage, Phase III
Core 0B2 / Noyau 0B2
Gatineau, Québec K1A 0S5
Bid Fax: (819) 997-9776

SOLICITATION AMENDMENT MODIFICATION DE L'INVITATION

The referenced document is hereby revised; unless otherwise indicated, all other terms and conditions of the Solicitation remain the same.

Ce document est par la présente révisé; sauf indication contraire, les modalités de l'invitation demeurent les mêmes.

Comments - Commentaires

Vendor/Firm Name and Address
Raison sociale et adresse du
fournisseur/de l'entrepreneur

Issuing Office - Bureau de distribution
Electrical & Electronics Products Division
11 Laurier St./11, rue Laurier
7B3, Place du Portage, Phase III
Gatineau, Québec K1A 0S5

Title - Sujet CCTV system at CBSA	
Solicitation No. - N° de l'invitation 47419-153242/A	Amendment No. - N° modif. 004
Client Reference No. - N° de référence du client 1000323242	Date 2015-02-20
GETS Reference No. - N° de référence de SEAG PW-\$\$HN-329-66623	
File No. - N° de dossier hn329.47419-153242	CCC No./N° CCC - FMS No./N° VME
Solicitation Closes - L'invitation prend fin at - à 02:00 PM on - le 2015-03-02	Time Zone Fuseau horaire Eastern Standard Time EST
F.O.B. - F.A.B. Plant-Usine: <input type="checkbox"/> Destination: <input checked="" type="checkbox"/> Other-Autre: <input type="checkbox"/>	
Address Enquiries to: - Adresser toutes questions à: Dumaresq, Steve	Buyer Id - Id de l'acheteur hn329
Telephone No. - N° de téléphone (819) 956-3487 ()	FAX No. - N° de FAX (819) 953-4944
Destination - of Goods, Services, and Construction: Destination - des biens, services et construction:	

Instructions: See Herein

Instructions: Voir aux présentes

Delivery Required - Livraison exigée	Delivery Offered - Livraison proposée
Vendor/Firm Name and Address Raison sociale et adresse du fournisseur/de l'entrepreneur	
Telephone No. - N° de téléphone Facsimile No. - N° de télécopieur	
Name and title of person authorized to sign on behalf of Vendor/Firm (type or print) Nom et titre de la personne autorisée à signer au nom du fournisseur/ de l'entrepreneur (taper ou écrire en caractères d'imprimerie)	
Signature	Date

Solicitation No. - N° de l'invitation

47419-153242/A

Amd. No. - N° de la modif.

004

Buyer ID - Id de l'acheteur

hn329

Client Ref. No. - N° de réf. du client

1000323242

File No. - N° du dossier

hn32947419-153242

CCC No./N° CCC - FMS No/ N° VME

This Amendment 004 is raised to answer the following bidder questions:

1. Amendment_004_Specs_English
2. Amendment_004_Specs_French

ALL OTHER TERMS AND CONDITIONS REMAIN UNCHANGED

2265 St-Laurent Blvd.
Addendum Following Site Visit Dated February 11, 2015 @ 1000

Question 1	Clarification on the server provided by CBSA
Reference:	Page 3 – Notice 3
Answer:	The CBSA will provide three (3) Dell PowerEdge R720xd units. The units meet the requirements in Table 9, 10 and 11. The units currently have recorded footage on them and will require it to be deleted. Table reference provided as a guide during configuration of units.

Question 2	Prior amendment from 25 to 24, but no camera at back door of 2265 Inland. Are we replacing that camera?
Reference	Page 4 – Cameras, Item 2
Answer	Correct. A camera must be installed at the back door of 2265 Inland Enforcement. Camera identified as number 24 in CCTV design.

Question 3	Are the monitors provided by the CBSA according to specifications?
Reference	Page 16 – Table 7 – Workstations, Item 10
Answer	<ul style="list-style-type: none"> - Yes. The monitors are equivalent to <i>HP Compaq LA2405wg</i>. - CBSA will provide four (4) of these units for the following: <ul style="list-style-type: none"> o SC-1: Chief of Operations o SC-2: Room 141 o SC-3: Superintendent desk o SC-4: Superintendent desk

Question 4	What type of CAT-6 cabling?
Reference	Page 5 – Network, Wiring and Cabling, Item 1
Answer	CAT-6 cabling must be FT6 rated. Exterior cameras must use CAT-6 outdoor/indoor rated cable.

Question 5	What are the full specifications and description of the supplied Eaton 9130? How many Us? What is the electrical rating for the UPS? 20A or 30A? Grounding required?
Reference	Page 6 – Network, Wiring and Cabling, Item 10
Answer	<p>CBSA will provide two (2) Eaton 9130 rackmount UPS.</p> <ul style="list-style-type: none"> - North American Rack Models: 120V, 50/60Hz - Model PW9130L1500R-XL2U - Rating (VA/Watts): 1500 / 1350 - Input connection: 5-15P - Output receptacles: 5-15R

Question 6	Clarification on the expectations of Item 3 under the warranty agreement.
Reference	Page 9 – Warranty, Item 3
Answer	Remove clause.

Question 7	Can all cameras be installed during regular work hours?
Reference	Page 11 – Table 2, Camera List
Answer	The following cameras can be installed during regular work hours.

	<ul style="list-style-type: none"> - 1, 2, 3, 4, 9, 10, 18, 19, 20, 21, 22, 23, 24 <p>The following must be installed after regular work hours or depending on operational feasibility. CBSA will inform the contractor if certain after hour cameras can be installed during regular work hours.</p> <ul style="list-style-type: none"> - 5, 6, 7, 8, 11, 12, 13, 14, 15, 17
--	---

Question 8	Can the camera housings be reused?
Reference	Page 15 – Table 6, Vandal and Tamper Proof Dome Camera
Answer	No. New housings are required.

Question 9	Why are the Table 10, Management / Failover Server Requirements for the Dell PowerEdge R720xd provided?
Reference	Page 20 – Table 10, Management / Failover Server Requirements
Answer	The table is only provided to be used as a guide when configuring the units. The units provided are what we require to be installed.

Question 10	Camera 1 and 2
Reference	Page 24 – Section 3, Site and Camera Layout, Floor 1
Answer	<ul style="list-style-type: none"> - Camera 1 and 2 – Are they corner mounted and is the bracket supplied? At what height must they be installed? <ul style="list-style-type: none"> o The cameras are to be corner mounted at approximately 3284mm from ground. o Mounting brackets are not provided and must be supplied by the contractor.

Question 11	Are we replacing the existing camera at the rear inland enforcement entrance?
Reference	Page 24 – Section 3, Site and Camera Layout, Floor 1
Answer	Yes. A replacement camera must be supplied and installed as per Table 6 – Vandal and Tamper Proof. The camera is identified as CBSA-24 in the design drawing.

Question 12	Can the server be worked on during regular work hours?
Reference	n/a
Answer	The server can be worked on during regular work hours. However, due to operational requirements, it may be possible that the server be worked on during off hours. CBSA will coordinate with the contractor.

Question 13	Are desk mount microphones acceptable?
Reference	n/a
Answer	No. Microphones must be concealed and secured on/within the wall.

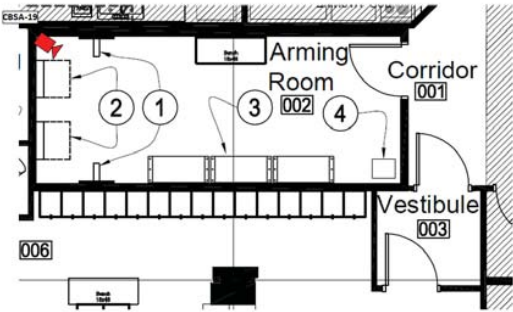
Question 14	Are wall mount cameras accepted where they are already installed in the same manner?
Reference	n/a
Answer	Yes.

Question 15	Can the existing monitor brackets be used?
Reference	n/a

Answer	<ul style="list-style-type: none"> - The existing brackets can be used if they support the monitor. - A bracket that permit the monitor to tilt, swivel and extend off the wall is however preferred.
--------	---

Question 16	What server rack is acceptable?
Reference	n/a
Answer	Refer to Table 12 – Enclosure for specifications.

Question 17	In ceiling support for cameras (back supports required)?
Reference	n/a
Answer	Must use T-bar J-Hooks whenever possible. If not, the cameras must be secured by some method.

Question 18	What is the final location for the arming room camera?
Reference	n/a
Answer	<p>The arming room camera will remain in the current location identified as CBSA-19A. However, a drop will be required in the Storage room location identified as CBSA-19B. CBSA is currently in the process of retrofitting the storage space to accommodate a new Arming Room. Once the room is complete, the camera will be relocated.</p> 

Question 19	Camera 20 and 21.
Reference	n/a
Answer	Both cameras in the garage must be concealed within a conduit and can be surface mounted.

Question 20	What server rack is acceptable?
Reference	n/a
Answer	A server rack equivalent to the requirements in Table 12 – Enclosure must be provided. Please note that the height of the cabinet can vary from the specifications in the table but must still contain all the equipment provided.

Table 2 – Camera List (Amended to included Camera 24)

#	LOCATION	TYPE	TABLE	SPECIFIC INSTALLATION REQ.
1	Exterior – NW Corner	PTZ	Table 5	Corner @ approx. 3284mm from ground
2	Exterior – NE Corner	PTZ	Table 5	Corner @ approx. 3284mm from ground

3	Exterior – Rear Entrance	FIX	Table 6	
4	Exterior – SE Corner	PTZ	Table 5	Corner @ approx. 3284mm from ground
5	Waiting Area	FIX	Table 4	
6	Interview Room – 148	FIX	Table 4	Facing client
7	Interview Room – 147	FIX	Table 4	Facing client
8	Waiting Area	FIX	Table 4	
9	Lobby	FIX	Table 4	
10	Stairwell	FIX	Table 6	
11	Interview Room – 142	FIX	Table 4	Facing client
12	Cell – 139	FIX	Table 3	Above toilet
13	Cell – 138	FIX	Table 3	Above toilet
14	Cell Hallway	FIX	Table 4	
15	Rear Entrance	FIX	Table 6	
16	Rear Inland Entrance Hallway	FIX	Table 4	
17	Fingerprint Area	FIX	Table 4	
18	Loading Dock	FIX	Table 6	
19	Arming Room	FIX	Table 6	
20	Parking Garage	FIX	Table 6	
21	Parking Garage	FIX	Table 6	
22	Basement Entrance	FIX	Table 6	
23	Lobby	FIX	Table 4	
24	Inland Enforcement Rear Entrance	FIX	Table 6	
25	Spare	FIX	Table 4	