

RETURN BIDS TO:
RETOURNER LES SOUMISSIONS À:
Bid Receiving Public Works and Government
Services Canada/Réception des soumissions Travaux
publics et Services gouvernementaux Canada
800 Burrard Street, Room 219
800, rue Burrard, pièce 219
Vancouver
British Columbia
V6Z 0B9
Bid Fax: (604) 775-9381

SOLICITATION AMENDMENT MODIFICATION DE L'INVITATION

The referenced document is hereby revised; unless otherwise indicated, all other terms and conditions of the Solicitation remain the same.

Ce document est par la présente révisé; sauf indication contraire, les modalités de l'invitation demeurent les mêmes.

Comments - Commentaires

Vendor/Firm Name and Address
Raison sociale et adresse du
fournisseur/de l'entrepreneur

Issuing Office - Bureau de distribution
Public Works and Government Services Canada -
Pacific Region
800 Burrard Street, Room 219
800, rue Burrard, pièce 219
Vancouver
British C
V6Z 0B9

Title - Sujet Culvert Replacement	
Solicitation No. - N° de l'invitation EZ899-152094/A	Amendment No. - N° modif. 003
Client Reference No. - N° de référence du client	Date 2015-03-10
GETS Reference No. - N° de référence de SEAG PW-\$PWY-026-7462	
File No. - N° de dossier PWY-4-37327 (026)	CCC No./N° CCC - FMS No./N° VME
Solicitation Closes - L'invitation prend fin at - à 02:00 PM on - le 2015-03-12	Time Zone Fuseau horaire Pacific Daylight Saving Time PDT
F.O.B. - F.A.B. Plant-Usine: <input type="checkbox"/> Destination: <input checked="" type="checkbox"/> Other-Autre: <input type="checkbox"/>	
Address Enquiries to: - Adresser toutes questions à: Liu (PWY), Patty	Buyer Id - Id de l'acheteur pwy026
Telephone No. - N° de téléphone (604) 775-6227 ()	FAX No. - N° de FAX (604) 775-6633
Destination - of Goods, Services, and Construction: Destination - des biens, services et construction: PWGSC - km 475 Alaska Highway - Alaska Highway, BC	

Instructions: See Herein

Instructions: Voir aux présentes

Delivery Required - Livraison exigée	Delivery Offered - Livraison proposée
Vendor/Firm Name and Address Raison sociale et adresse du fournisseur/de l'entrepreneur	
Telephone No. - N° de téléphone Facsimile No. - N° de télécopieur	
Name and title of person authorized to sign on behalf of Vendor/Firm (type or print) Nom et titre de la personne autorisée à signer au nom du fournisseur/de l'entrepreneur (taper ou écrire en caractères d'imprimerie)	
Signature	Date

Les documents français seront disponibles sur demande.

Amendment 003

Addendum 001 and Addendum 002 attached.

Clarification to questions raised:

Q1. On page 31 to 33 of the Environmental Effects Evaluation (EEE) report Dated January 2015 there are supposed to be some pictures. Can you please provide us with those pictures as it will be very helpful with regards to bidding this project.

A1. Please view attached Addendum 002.

Q2. Is it possible to make the drawing available separately from the specification?

A2. Please view attachment.

Q3. The specification requires that the rebar in the culvert is epoxy coated. Will a non-coated rebar be acceptable?

A3. Please view Addendum 001.

All other terms and conditions remain unchanged.

**The following changes/clarifications in the tender documents are effective immediately.
This addendum will form part of the contract documents.**

Special Instructions to Bidders

PROVIDING ALL CONCRETE WORK IS EXECUTED IN ACCORDANCE WITH SPECIFICATIONS SECTION 03 33 00 AND THE FOLLOWING MINIMUM COVER AND REBAR REQUIREMENTS ARE COMPLIED WITH, USE OF NON COATED REBAR SHALL BE PERMITTED.

CONCRETE COVER

- CONCRETE COVER SHALL BE AS FOLLOWS:
 - 75mm - CONCRETE IS CAST AGAINST AND PERMANENTLY EXPOSED TO EARTH.
 - 50mm - FOR 20M AND LARGER BARS AT ALL OTHER LOCATIONS.
 - 38mm - FOR 15M AND SMALLER BARS AT ALL OTHER LOCATIONS

REINFORCING STEEL

- STEEL REINFORCEMENT SHALL BE MINIMUM GRADE 400 MPa. DEFORMED BARS CONFORMING TO CAN/CSA G30.18M92 9R002
- BENDS, OTHER DETAILS AND PLACING OF STEEL REINFORCEMENT SHALL BE IN ACCORDANCE WITH CSA STANDARD CAN/CSA-A23.1-09

End of Addendum No.1

**The following changes/clarifications in the tender documents are effective immediately.
This addendum will form part of the contract documents.**

Special Instructions to Bidders

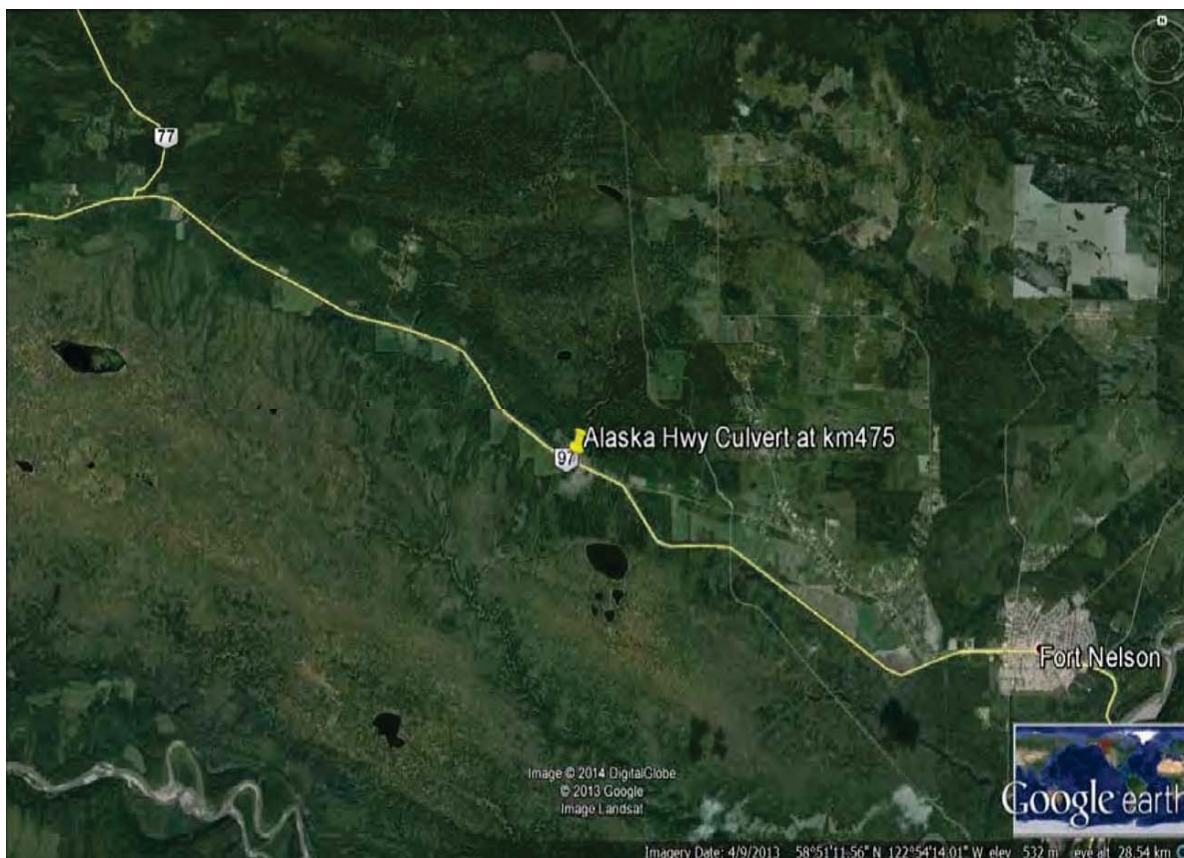


Figure 1: Crossing Location



Figure 2: Upstream view of channel, approximately 200 m downstream of crossing location. Watercourse slope 2%.



Figure 3: Downstream view of channel, approximately 200 m downstream of crossing location. Watercourse is entrenched but not incised.



Figure 4: Inlet of culvert at Km 475 of the Alaska Highway, BC. This crossing site is approximately 19 km north of Fort Nelson

The following revisions are made to the specifications for this tender:

Section 313700 – Riprap: Remove Clause 1.1.2 and replace with the following clause:

“The quantity of rock rip-rap to be paid for will be measured in place. The volume of rock paid for will be calculated from the thickness of the rip-rap as shown on the drawings, and the actual areas covered. Overages in thickness or area beyond the limits shown on the drawings will not be paid for unless these changes were requested by the Departmental Representative.”

Section 354219 – Preservation of Watercourses: Remove Clause 1.2.1 and replace with the following clause:

“No separate payment will be made for preservation of watercourses. Include watercourse protection in Lump Sum price for Water Management and Pumps in the Schedule of Quantities and Unit Prices.”

End of Addendum No.2