






Revision/ Révision	Description/Description	Date/Date
	<p>A detail number numéro de détail</p> <p>B source drawing no. de dessin no.</p> <p>C detail on drawing no. détail sur dessin no.</p>	

WESTERN AND NORTHERN REGION



**PALACE GRAND THEATRE
FOUNDATION REPLACEMENT**

SECTIONS & DETAILS
SHEET-1


S6	0
OF	

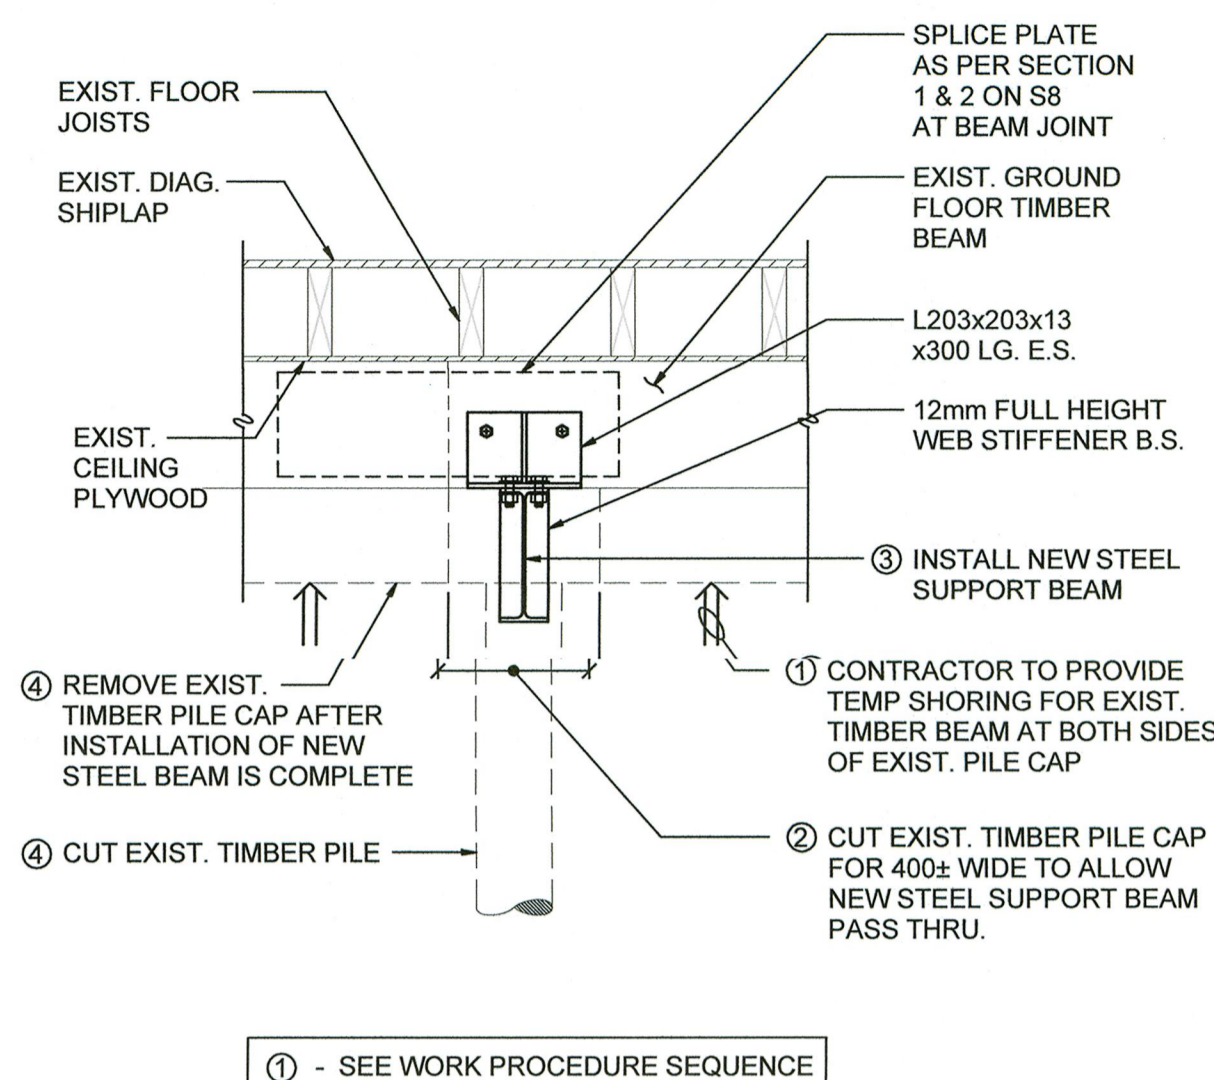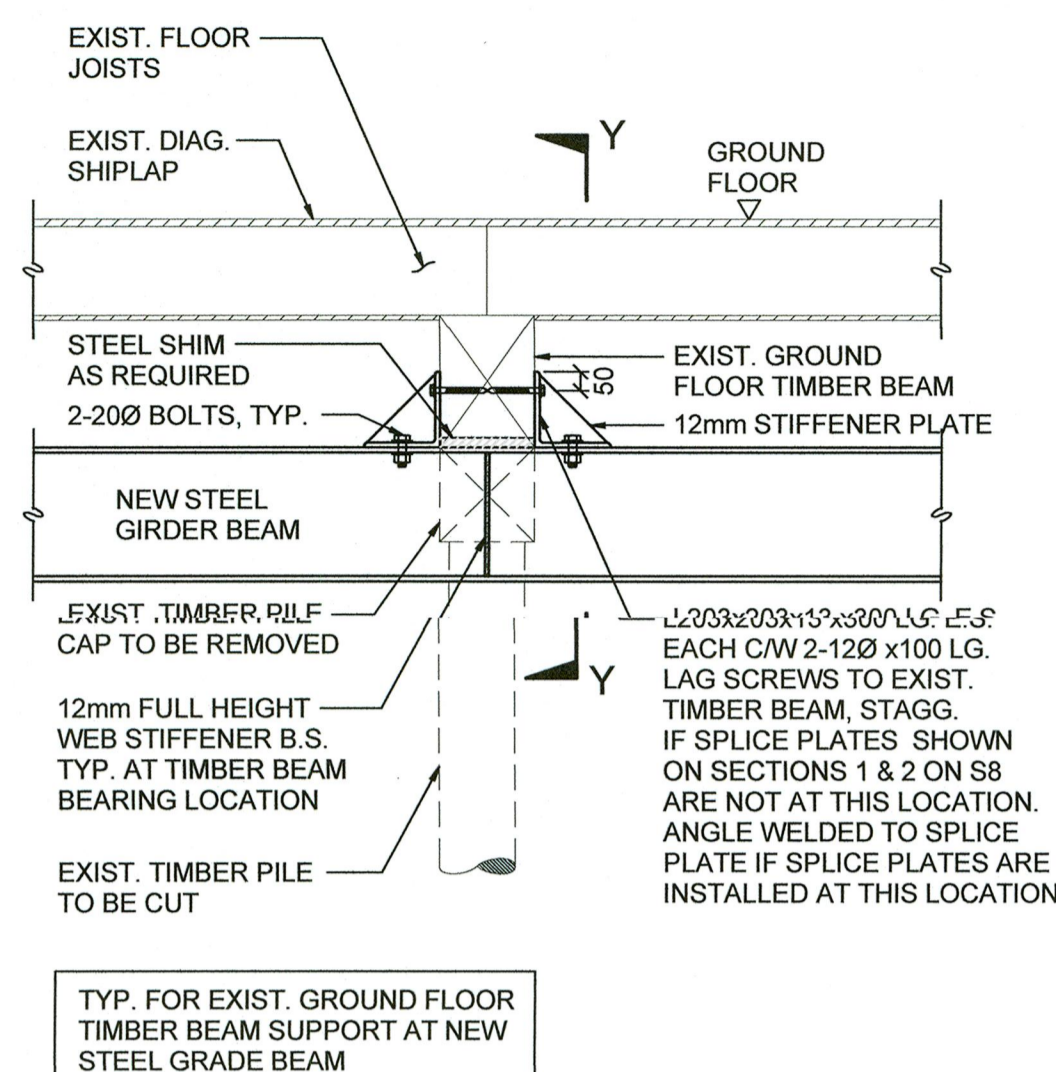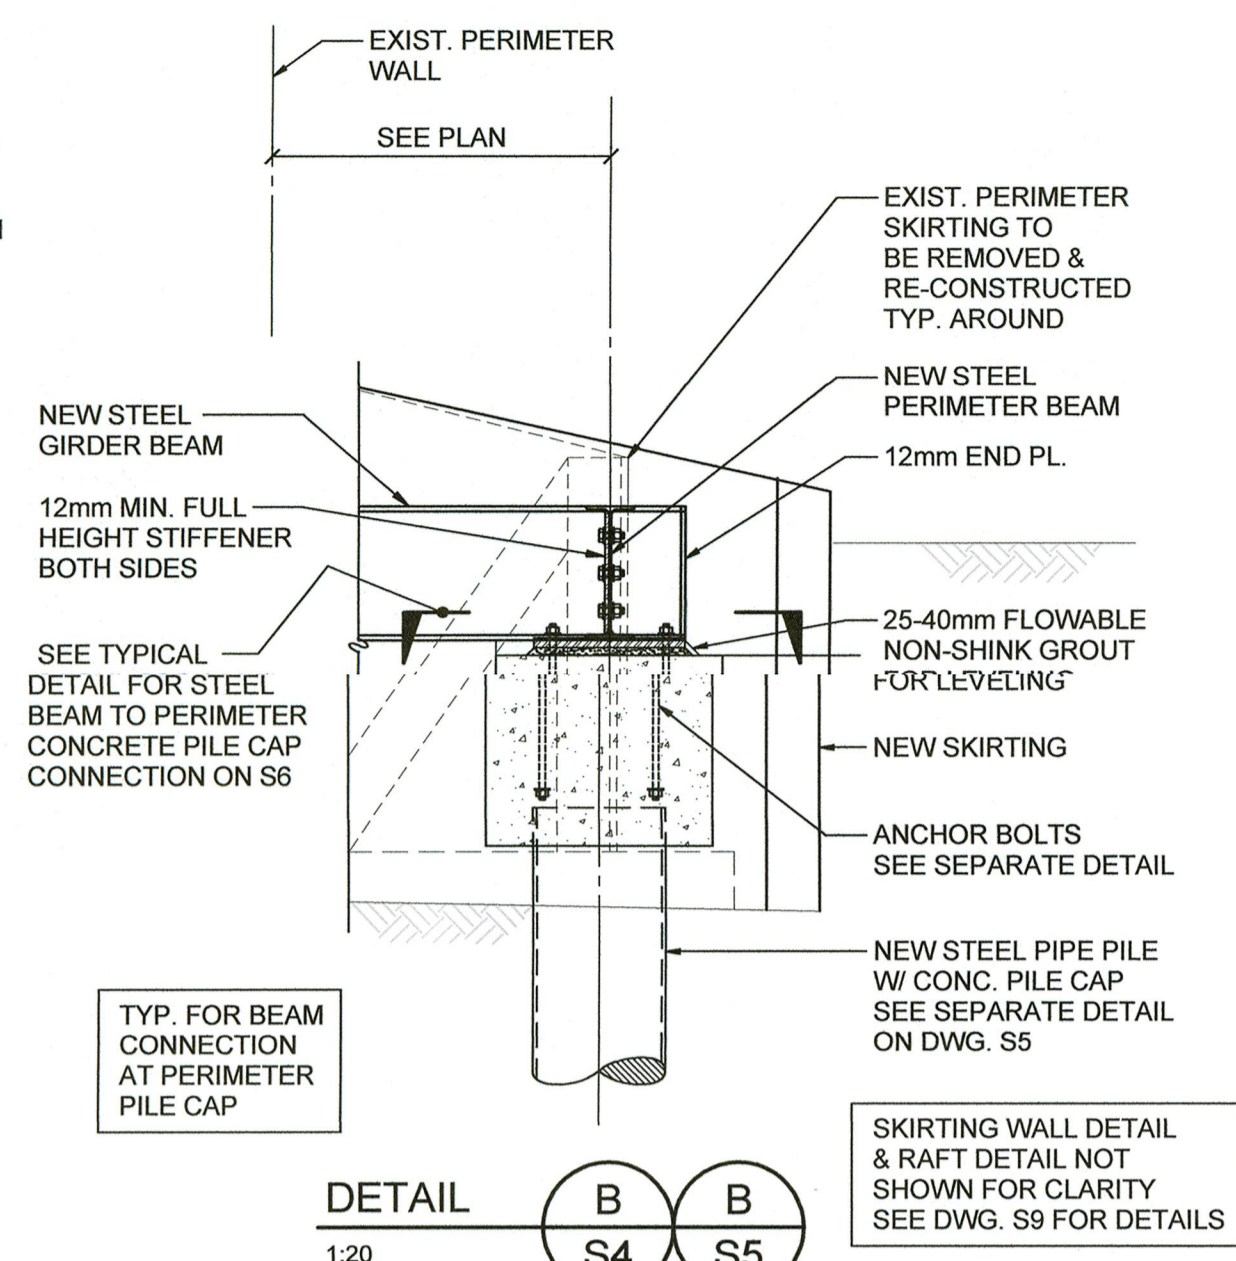

1. INSTALL NEW PILE
2. LOCALLY REMOVE EXIST. PILE CAP FOR NEW GIRDER BEAM INSTALLATION
3. INSTALL NEW STEEL GIRDER BEAM
4. REMOVE THE REMAINING PORTION OF PILE CAP & CUT EXIST. TIMBER PILE
5. INSTALL PERIMETER TIE BEAM

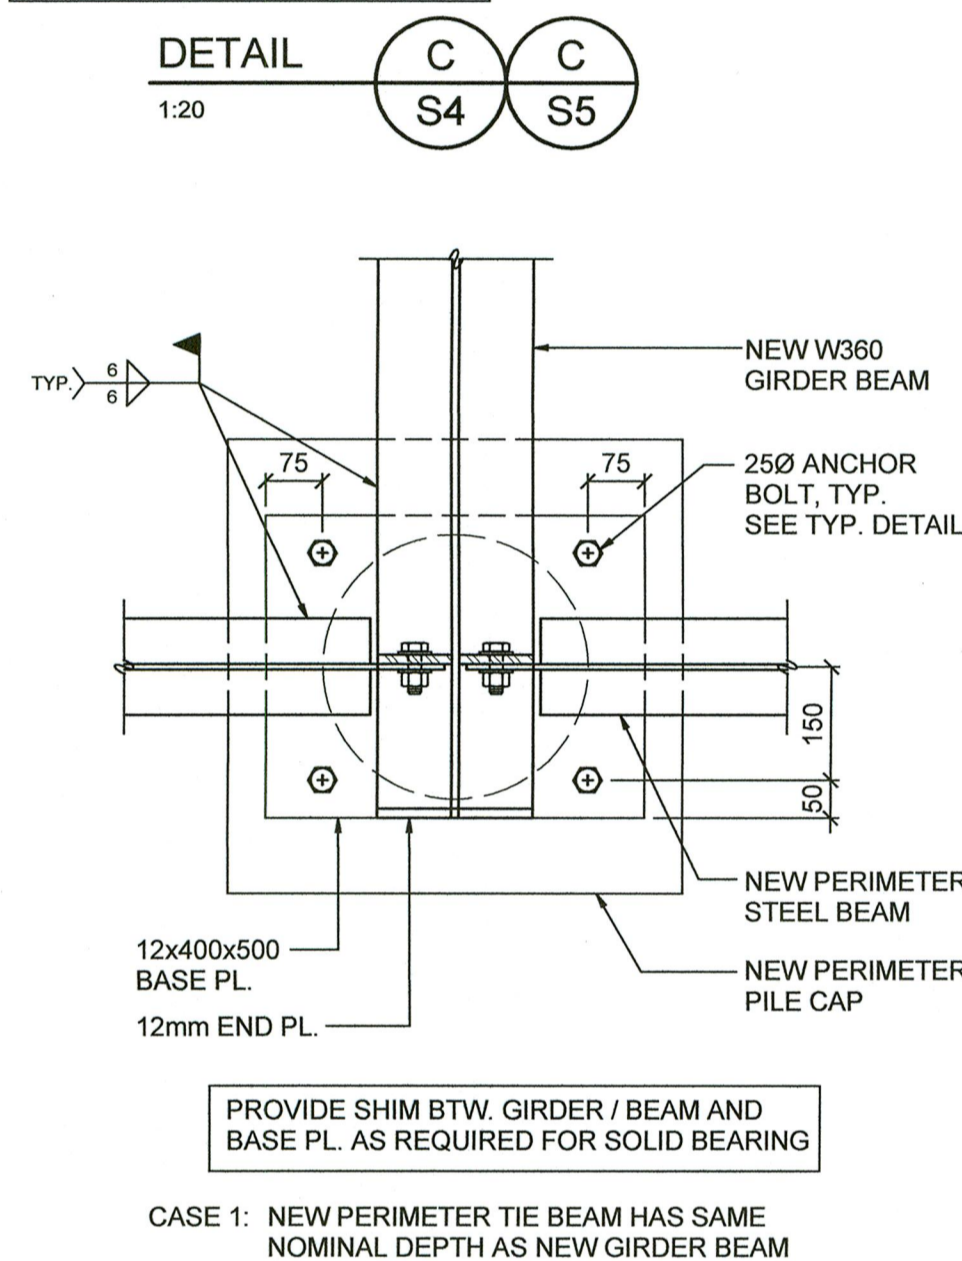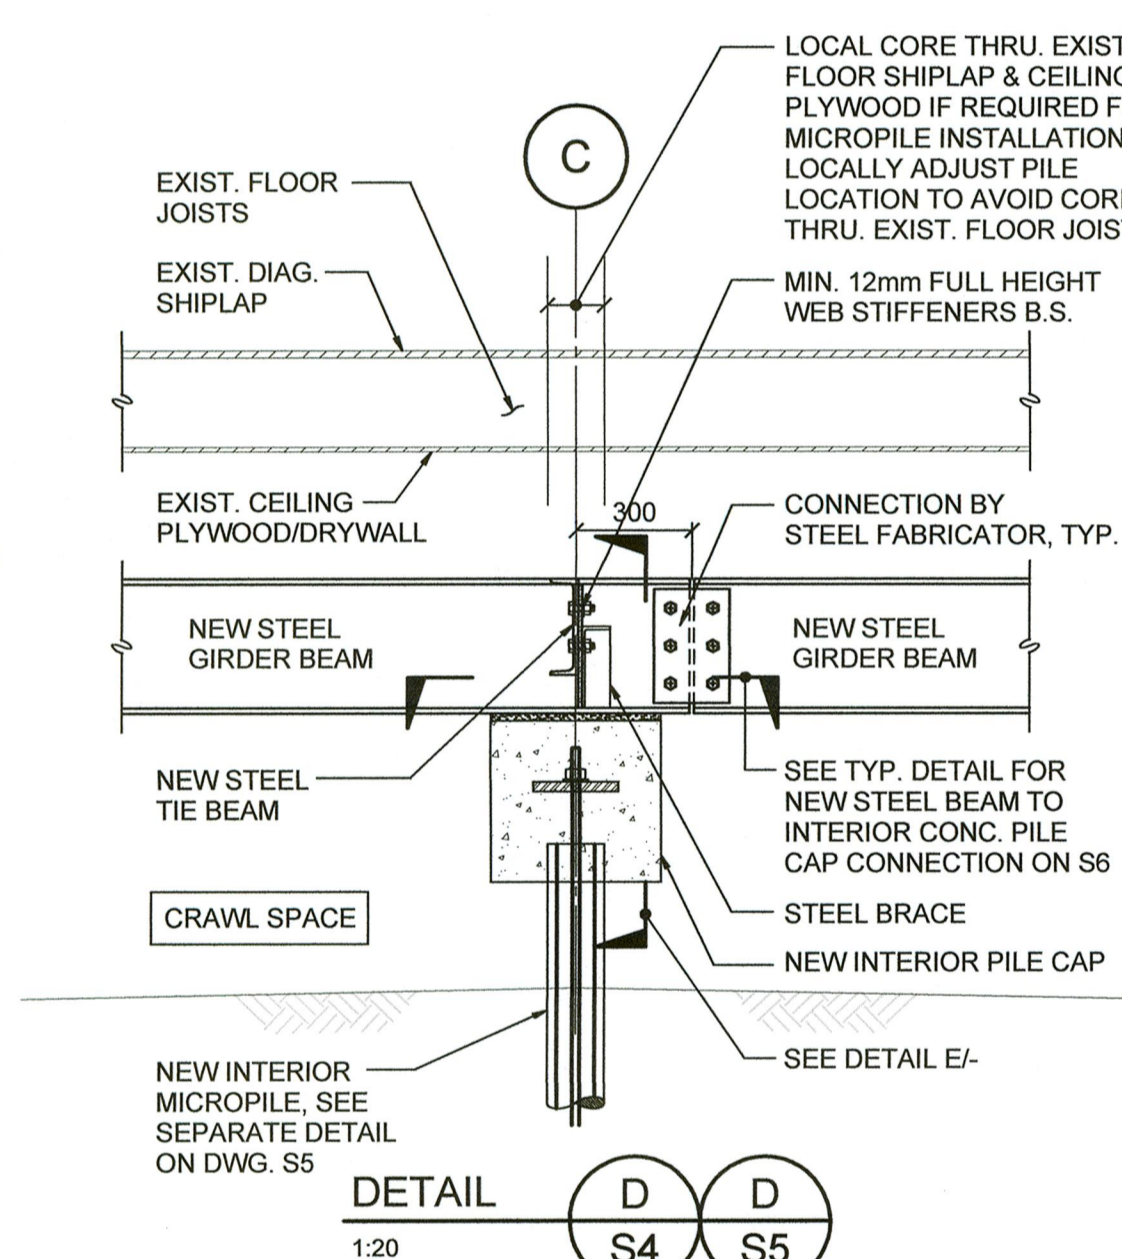


CASE 1: NEW PERIMETER TIE BEAM HAS SAME NOMINAL DEPTH AS NEW GIRDER BEAM

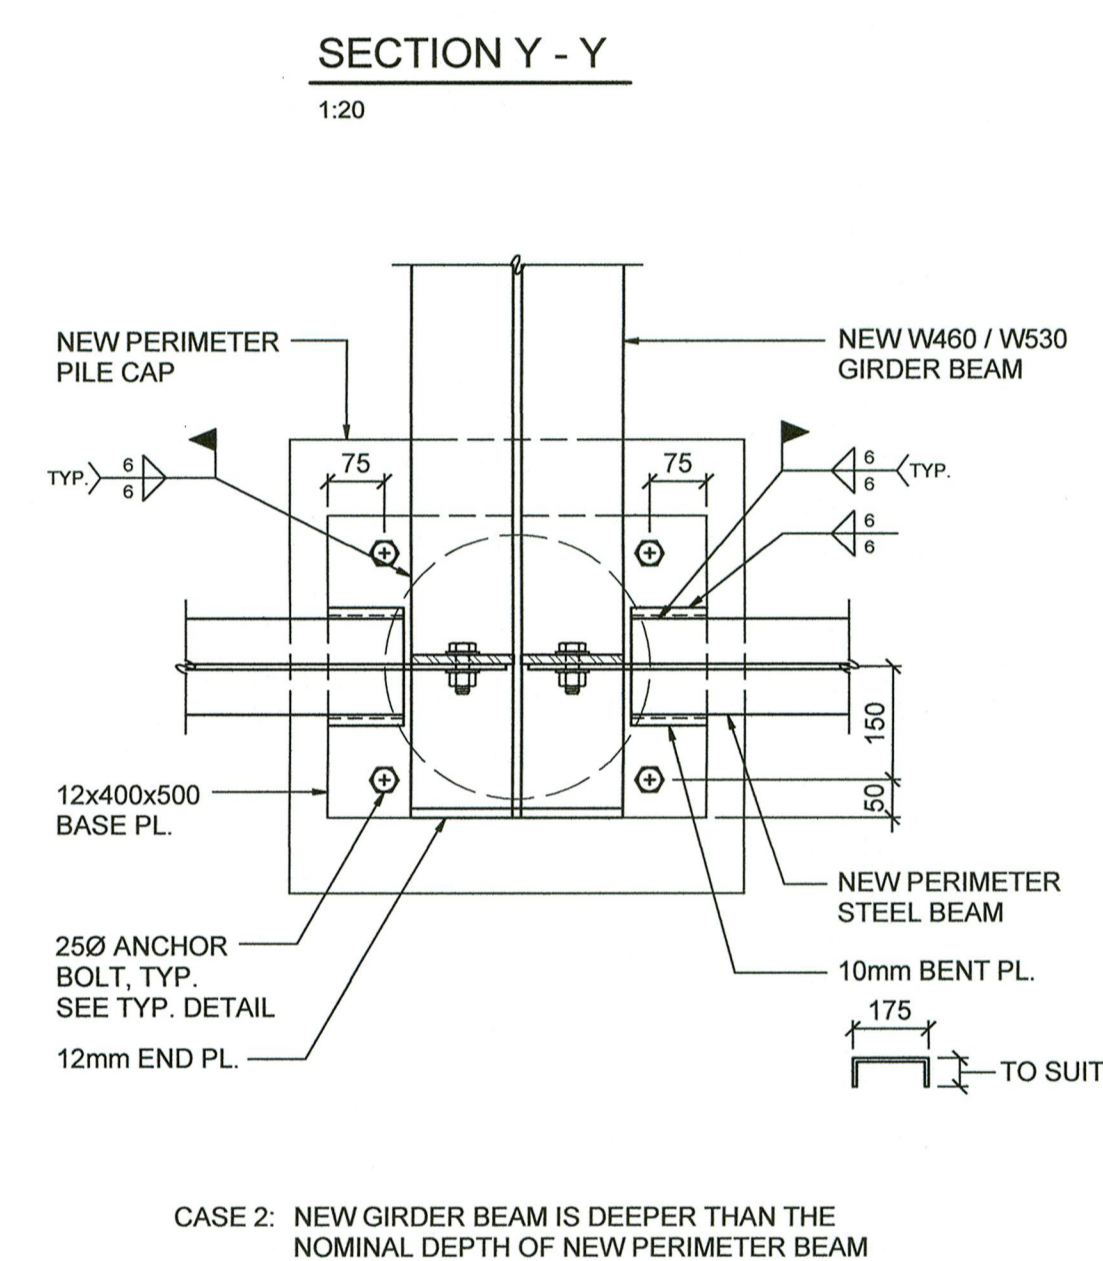


CASE 2: NEW GIRDER BEAM IS DEEPER THAN THE
NOMINAL DEPTH OF NEW PERIMETER BEAM

1:10

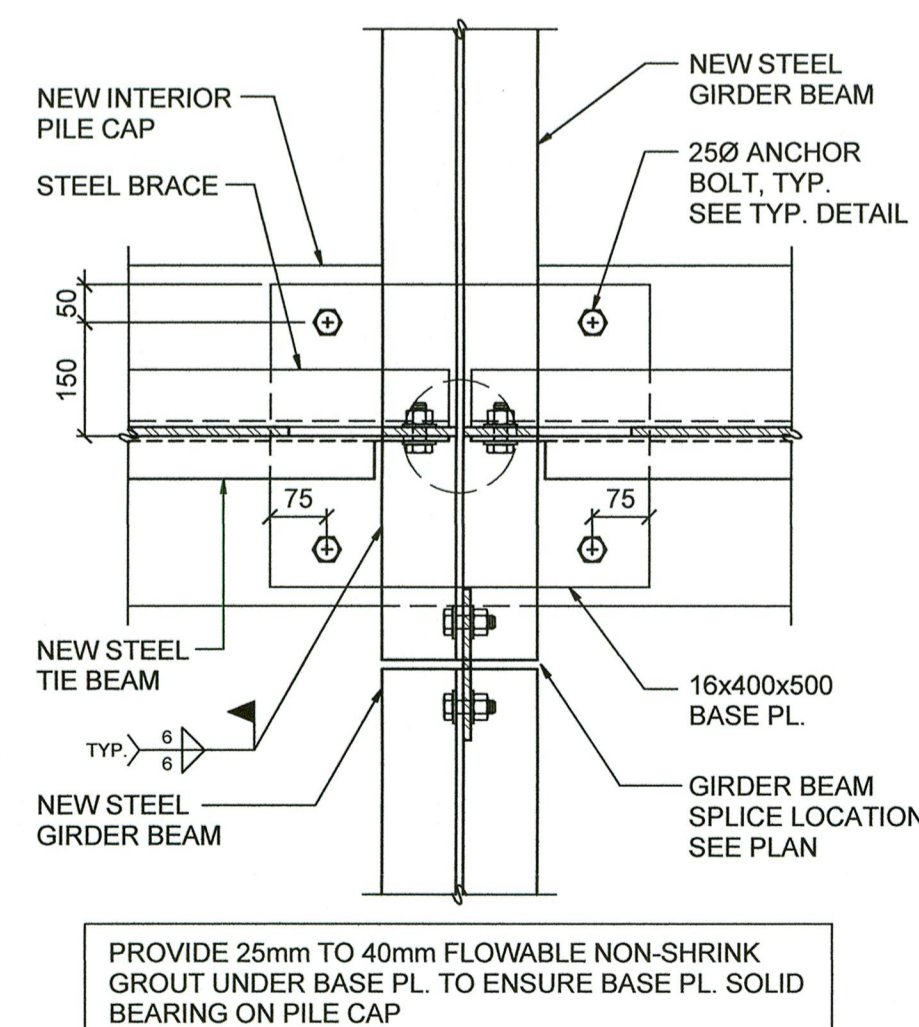


PROVIDE 25mm TO 40mm FLOWABLE NON-SHRINK GROUT UNDER BASE PL. TO ENSURE BASE PL. SC BEARING ON PILE CAP

1:10

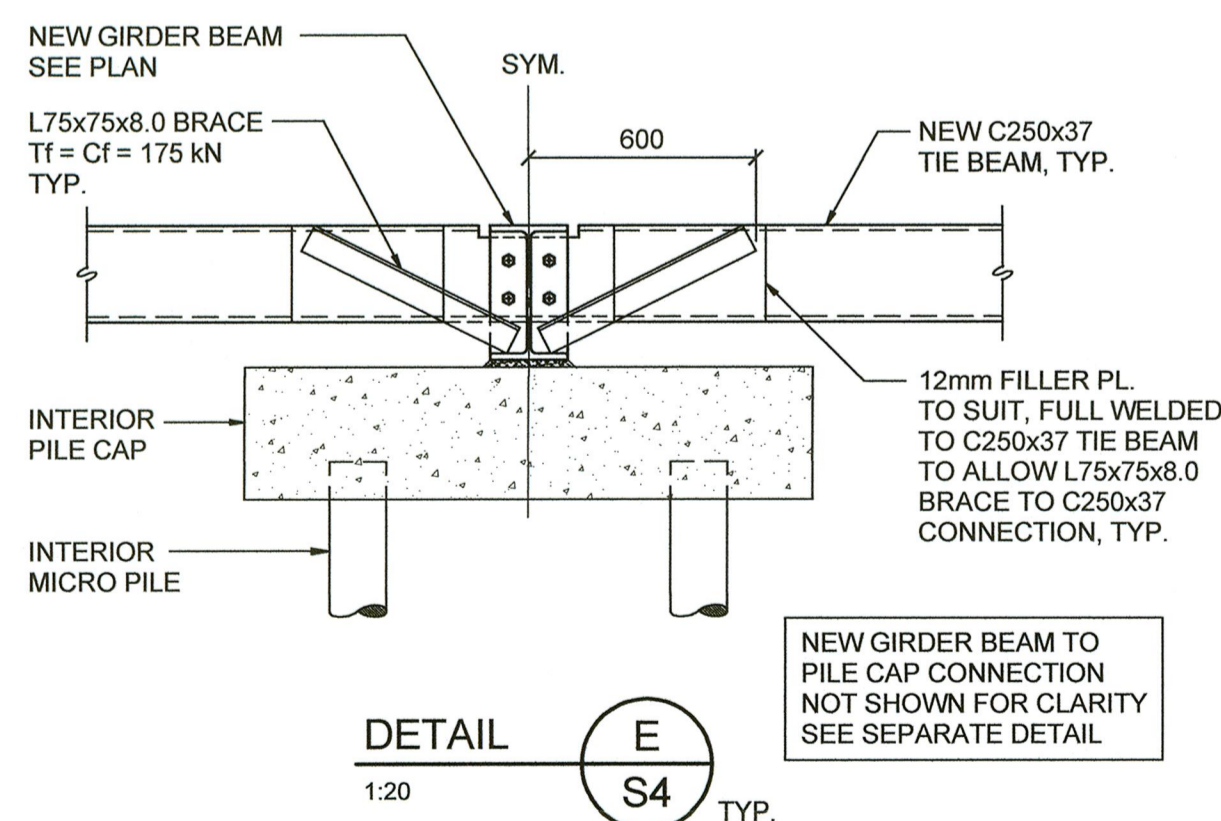

SECTION X - X

1:20

DETAIL  TYP

1:20

S4