

LEGEND

(E) WALLS TO REMAIN


(N) WALLS

(E) DOOR TO REMAIN

(E) WINDOW TO REMAIN

(E) DOOR RELOCATED

(N) DOOR



Public Works and
Government Services
Canada

REAL PROPERTY SERVICES
Pacific Region
SERVICES IMMOBILIERS



GENERAL NOTES

THE GENERAL CONTRACTOR SHALL VERIFY ALL DIMENSIONS PRIOR TO COMMENCEMENT OF WORK. ALL ERRORS & OMISSIONS TO BE REPORTED TO NTAG

VARIATIONS AND MODIFICATIONS TO WORK SHOWN ON THESE DRAWINGS SHALL NOT BE CARRIED OUT WITHOUT WRITTEN PERMISSION BY NTAG

ALL DIMENSIONS ARE FROM FACE OF STUD TO FACE OF STUD

ALL DIMENSIONS ARE METRIC (mm) UNLESS NOTED OTHERWISE

THESE DRAWINGS ARE TO BE READ IN CONJUNCTION WITH AND COORDINATED WITH THE SPECIFICATIONS AND DRAWINGS OF OTHER DISCIPLINES THAT FORM THE FULL CONTRACT DOCUMENT PACKAGE. REPORT ANY CONFLICT BETWEEN DOCUMENTS TO NTAG BEFORE PROCEEDING

PROTECT (E) ITEMS DESIGNATED TO REMAIN. MAKE GOOD ANY DAMAGE TO (E) ITEMS DESIGNATED TO REMAIN THAT IS THE RESULT OF DEMOLITION OR CONSTRUCTION


WHERE ANY DEMOLITION OCCURS: PATCH, REPAIR & MAKE GOOD ALL EXISTING SURFACES

REMOVE & REINSTALL ALL WALL-MOUNTED FIXTURES AND DEVICES AS REQUIRED. PATCH AND REPAIR FINISHES AS REQUIRED

REMOVE (E) WALL FINISHES AS REQUIRED TO COMPLETE THIS CONTRACT

WHERE DAMAGE TO (E) CEILING OCCURS, PATCH, REPAIR & MAKE GOOD

(E) FLOORING TO REMAIN IN 2ND FLOOR AREA OF CONSTRUCTION. PATCH & REPAIR (E) FLOORING AS REQ. TO ACCOMMODATE DEMO & CONSTRUCTION OF (N) WALLS. RE-USE CARPET TILE RETAINED FROM DEMO OF 4TH FLOOR RENOVATION TO PATCH 2ND FLOOR FLOORING.

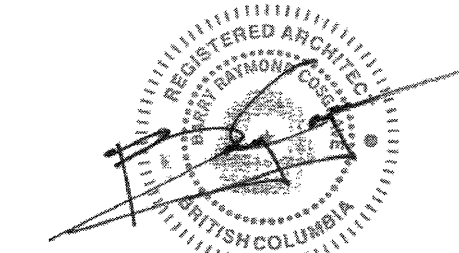

USE ISSUED FOR TENDER/REVISION FOR PERMITS

5 ISSUED FOR TENDER 2015-05-14

2 88% CONSOLIDATED SUBMISSION 2015-04-21

1 88% SUBMISSION 2015-03-27

Revision/ Revision Description/Description Date/Date

Client/client

**CAN NOR and
PUBLIC WORKS &
GOVERNMENT SERVICES**

800 BURNARD ST.
VANCOUVER, BC

Project title/Titre du projet
**2nd & 4th Floor - 300 Main Street
Whitehorse, YT**

**CAN NOR Relocation
Consolidated**

Consultant Signature Only

Designed by/Concept par

LM

Drawn by/Dessiné par

LM, CM

PWGSC Project Manager/Administrateur de Projets TPSSGC

CYNDI OSTER

PWGSC, Architectural and Engineering Resources Manager/

PREETIPAL PAUL

Client/client

CAN NOR

Drawing title/Titre du dessin

**SECOND FLOOR
RENOVATION PLAN
PHASE 1**

Project No./No. du


R.072738.001

Sheet/

A02
OF 16

Revision no./

5

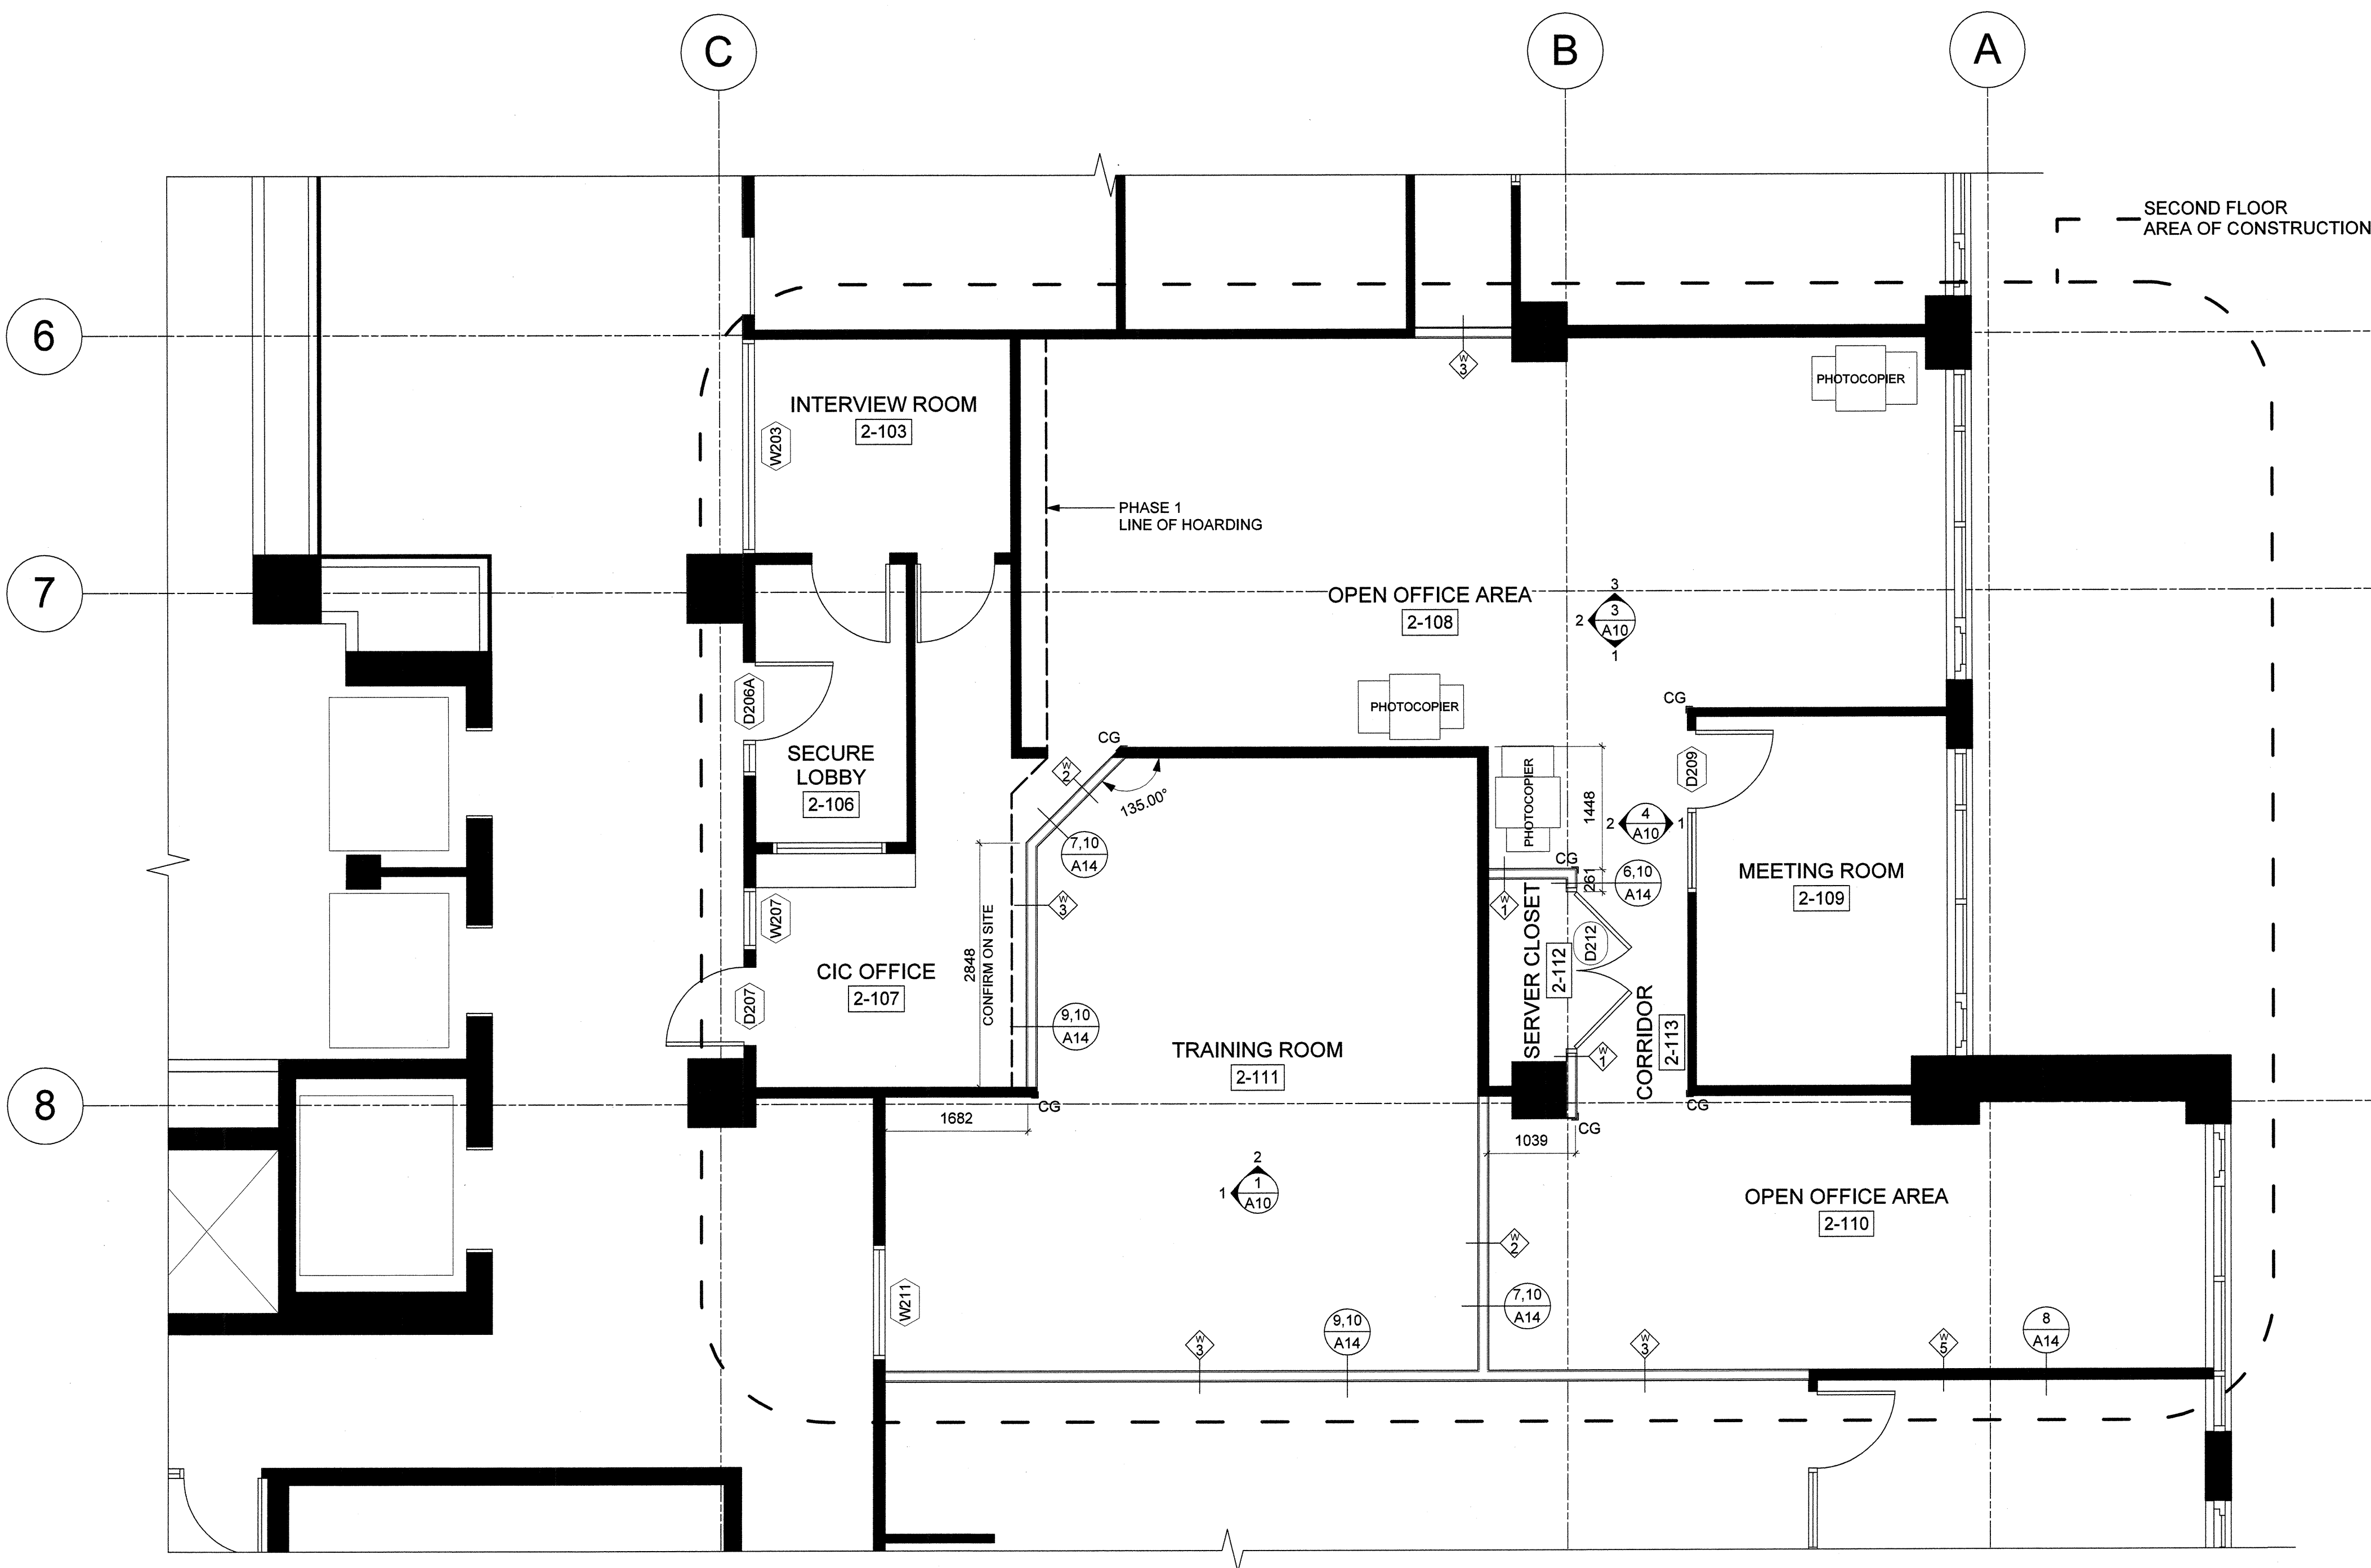

1 Second Floor - Phase 1 Renovation Plan
A02 1:50