

GENERAL NOTE:  
CONTRACTOR TO CARRY THE COST OF SHARED SERVICES CANADA (SSC) CERTIFIED CONTRACTOR TO DO ALL THE TEL/DATA STRUCTURAL WIRING, MAIN TERMINATIONS, CROSS CONNECT, PATCH PANELS AND ALL RELATED WORK IN THE BID PRICE. ONLY SSC CONTRACTOR IS ALLOWED TO DO THE STRUCTURAL WIRING AND TEL/DATA CABLING WORK AND THE TERMINATIONS IN THE RENOVATED SPACE, ALLOW FOR NEW TEL/DATA PLUGS INSIDE THE SPACE IN THE BID PRICE FOR COMPLETE OPERATIONAL SYSTEM. EXISTING EMPTY CONDUITS AND BOXES ONLY ALLOWED TO BE RE-USED FOR THE NEW TEL/DATA SYSTEM. INSTALL NEW CABLES AND ALL ACCESSORIES FOR THE NEW LOCATIONS AS SHOWN.

EXISTING EMPTY CONDUITS, WIRING, AND BOXES ARE ALLOWED TO BE RE-USED FOR THE NEW POWER SYSTEM. INSTALL NEW CABLES AND ALL ACCESSORIES FOR THE NEW LOCATIONS AS SHOWN. SPLICES EXISTING WIRING INSIDE JUNCTION BOXES AND EXTEND TO NEW LOCATION. RE-USE CIRCUITS AS SHOWN.

**POWER, TEL/DATA AND SECURITY PLAN RENO TAGS:**

R: EXISTING TO BE RELOCATED, USE THE SAME CIRCUITS AND WIRING WHERE POSSIBLE, SUPPLY AND INSTALL NEW BOXES, RECEPTACLES, DATA PLUGS, COVERS, LABELING, WIRING AND TERMINATIONS FROM THE ORIGINAL LOCATION TO THE NEW LOCATION FOR COMPLETE OPERATIONAL SYSTEM TO MEET THE CEC 22.1-15.


E: EXISTING TO REMAIN IN THE SAME LOCATION.

N: NEW EQUIPMENT, FEED FROM CLOSEST CIRCUIT/SWITCH.

**EXISTING IT RACK CONTAINING:**

- 12 PORTS D-MARK
- 2 X HP HEWLETT PACKARD 2424M SWITCH 12 PORT + 24 PORTS
- PEKO DV4100 SERIES VIDEO RECORDER.
- DSC PC1832 SECURITY PANEL.
- PEKO CAMERA POWER SUPPLY.
- G.E. 1500VA UPS
- TVSS
- ALL ASSOCIATED EQUIPMENT AND WIRING FOR THE SYSTEMS.

ALL EQUIPMENT MUST BE RELOCATED TO THE NEW IT CLOSET, ALLOW FOR ALL LABORS, MATERIAL, TERMINATIONS, TESTING AND COMMISSIONING IN THE BID PRICE.

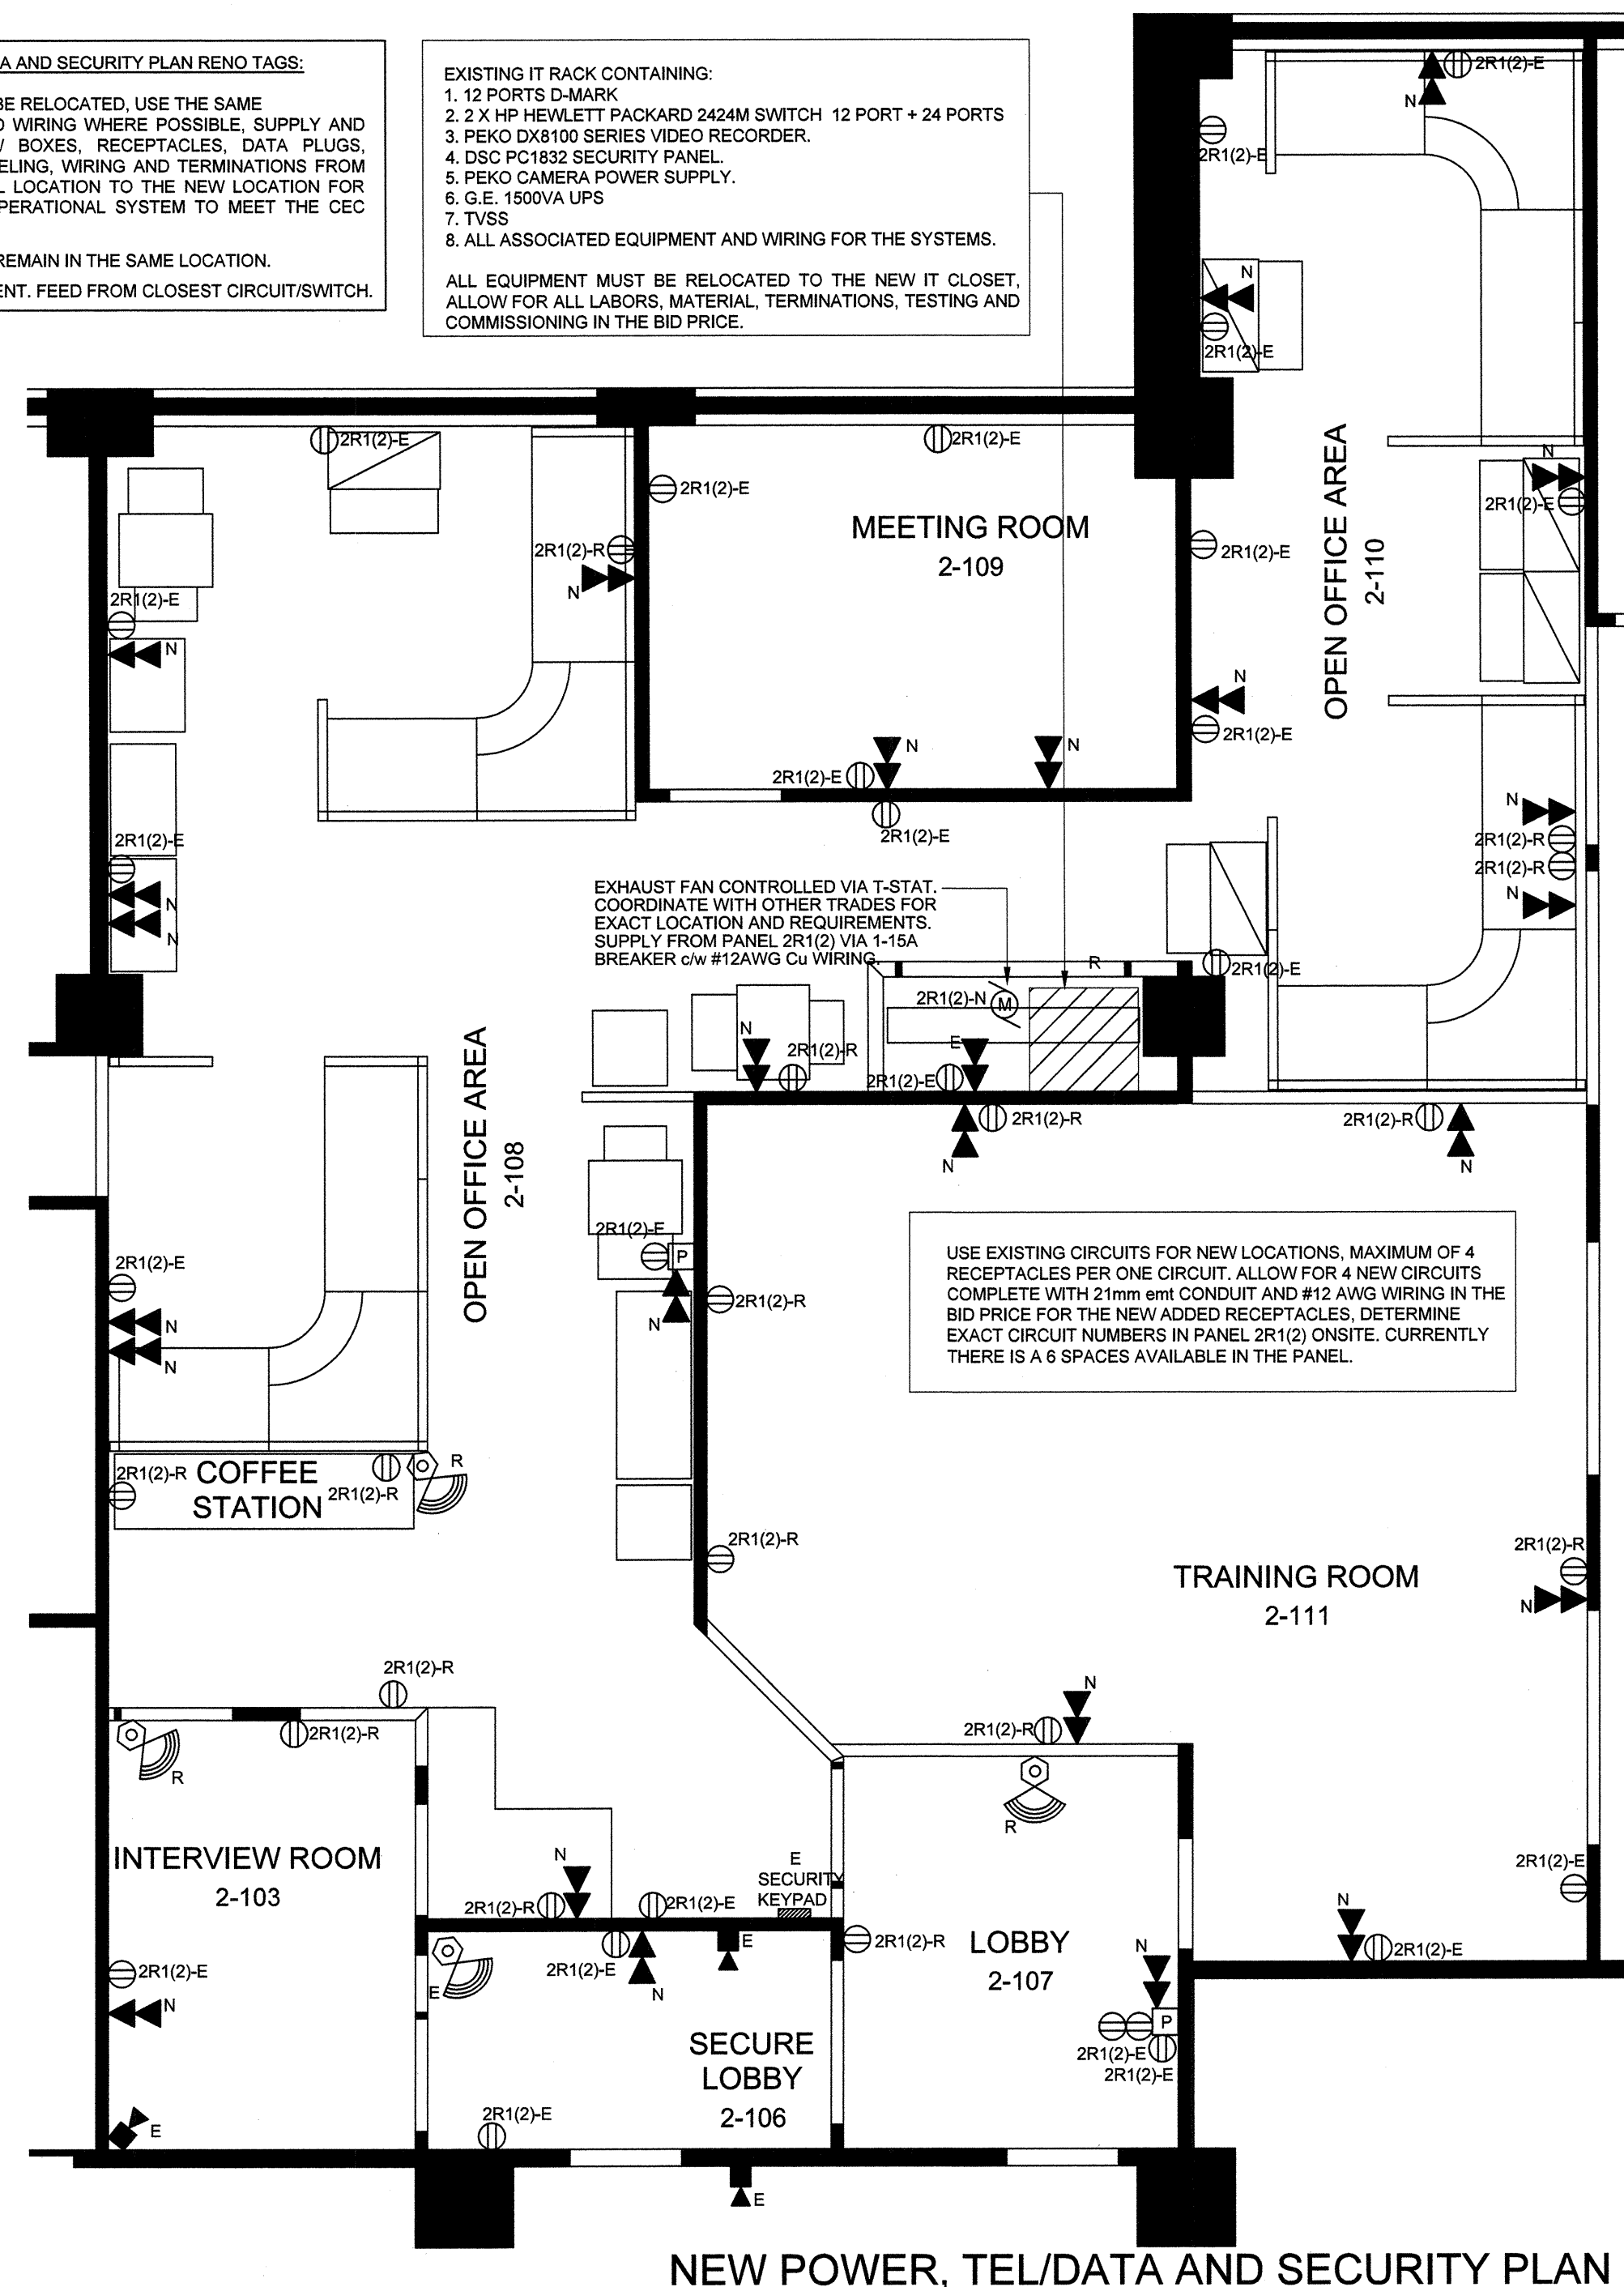

**NEW POWER, TEL/DATA AND SECURITY PLAN**  
SCALE 1:50


**LIGHTING PLAN RENO TAGS:**

R: EXISTING TO BE RELOCATED


E: EXISTING TO REMAIN IN THE SAME LOCATION, MODIFY CIRCUITS TO MATCH NEW SWITCHING LAYOUT

N: NEW EQUIPMENT.

RE-USE EXISTING LIGHT FIXTURES, LIGHT SWITCHES, RELAYS AND CIRCUITS WHERE POSSIBLE. REPAIR WHERE NEEDED ALLOW FOR MIN.5 FIXTURES REPAIR IN THE BID PRICE. ALL EXISTING T-BAR FIXTURES TO BE REUSED. TYPICAL FOR 27 - 2X4 FIXTURES AND 3 POT LIGHTS. RELOCATE EXISTING FIXTURES TO MATCH THE NEW LAYOUT.

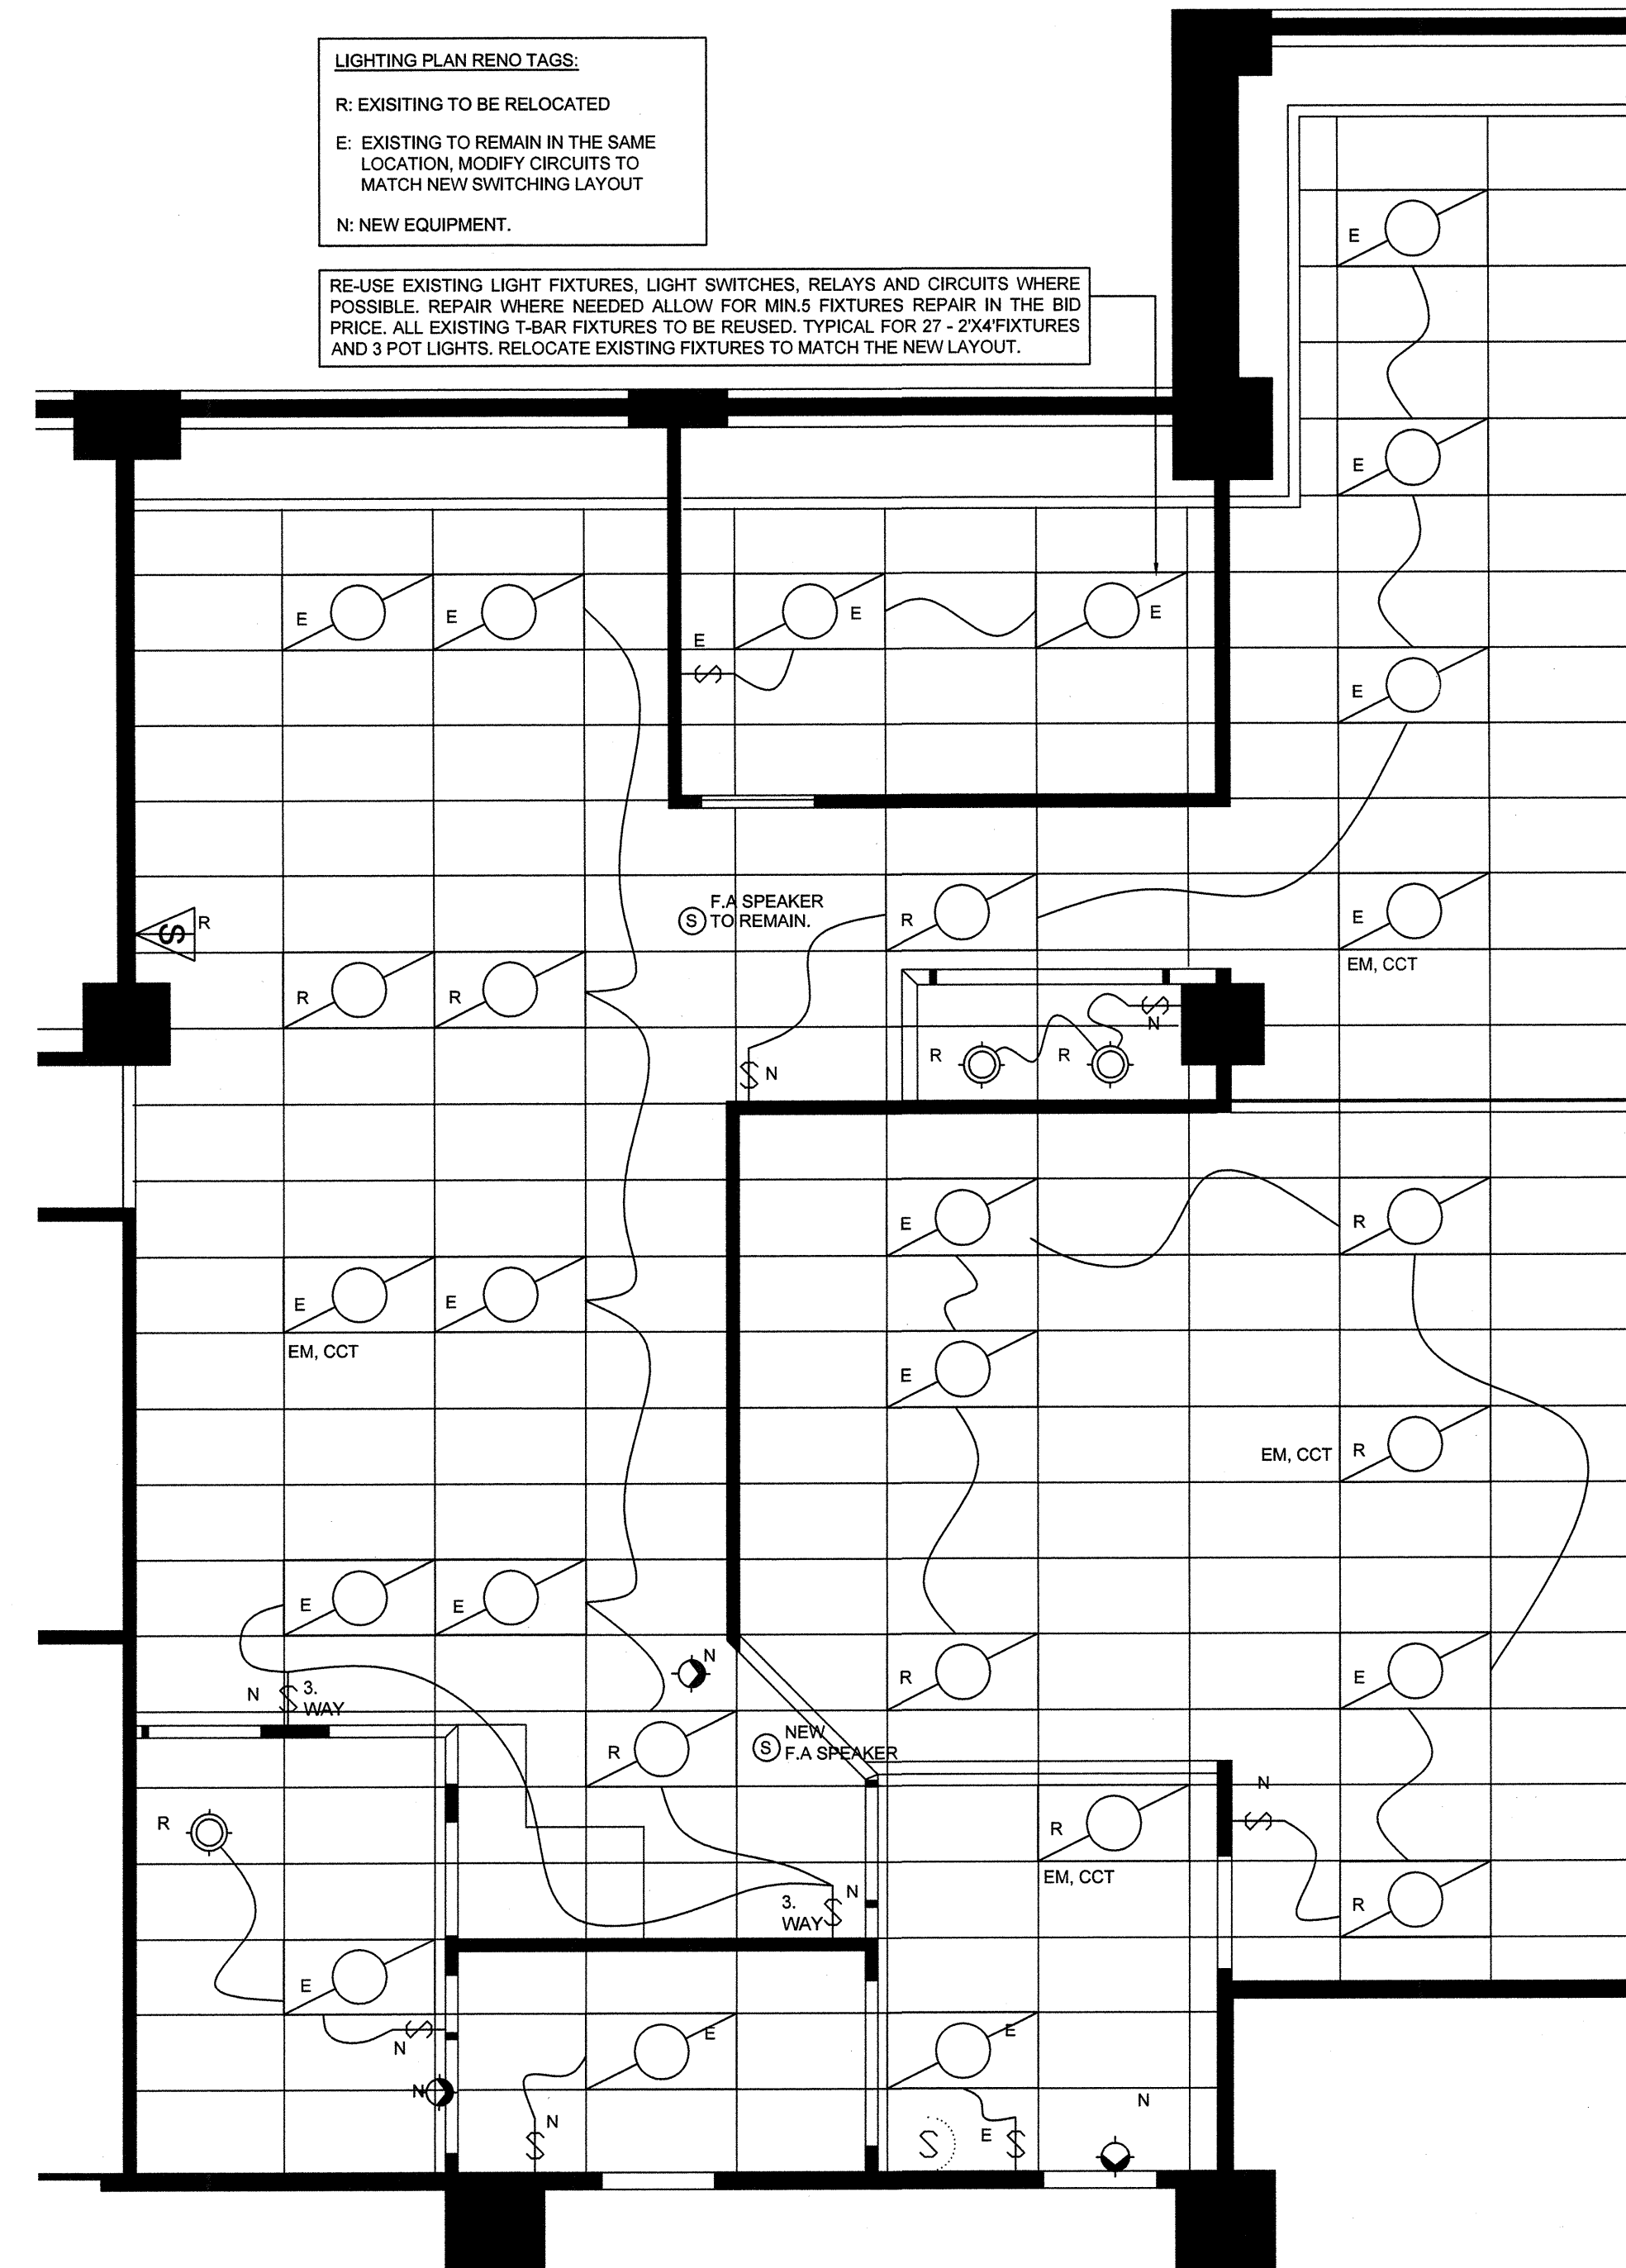

**NEW LIGHTING PLAN**  
SCALE 1:50



**PERMIT TO PRACTICE**

Signature: \_\_\_\_\_

Date: 14 May 2015

**PERMIT NUMBER: PP001**

Association of Professional Engineers  
of Yukon

Revision/	Description	Date
4	ISSUED FOR TENDER	14-05-2015
3	REVISED 90% SUBMISSION	17-04-2015
2	90% SUBMISSION	07-04-2015
1	60% SUBMISSION	27-03-2015

**CAN-NOR and  
PUBLIC WORKS &  
GOVERNMENT SERVICES**

800 BURREAD ST.  
VANCOUVER, BC

Project title/Titre du projet  
2nd & 4th Floor - 300 Main Street  
Whitehorse, YT

**CAN-NOR Relocation  
Consolidated**

Consultant Signature Only

Designed by/Concept par  
**AD**

Drawn by/Dessiné par  
**AD**

PWGSC Project Manager/Administrateur de Projets TPSPG  
**Cyndi Oster**

PWGSC, Architectural and Engineering Resources Manager/  
Ressources Architectural et de Directeur d'ingénierie, TPSPG  
**Preetpal Paul**

Client/client  
**CAN-NOR**

Drawing title/Titre du dessin  
**2nd FLOOR TENANT  
IMPROVEMENT  
POWER, TEL/DATA,  
AUXILIARY SYSTEMS,  
LIGHTING AND LIFE SAFETY  
NEW LAYOUT**

Project No./No. du projet	Sheet/ Feuille	Revision no./ La Révision no.
<b>R.072738.001</b>	<b>E2</b> of 07	<b>0</b>