






A	DETAIL/SECTION NUMBER
B	PAGE WHERE DETAIL TAKEN
C	PAGE WHERE DETAIL FOUND

EFFIES BROOK BRIDGE SCOPE OF WORK



1. CONFIRM ALL REPAIRS WITH DEPARTMENTAL REPRESENTATIVE IN FIELD PRIOR TO UNDERTAKING ANY WORK.
2. REPLACEMENT OF EXISTING FIXED CONTROL JOINT AND EXPANSION JOINT GLANDS.
3. REMOVE ALL FORMWORK FROM PREVIOUS REPAIRS.
4. INSTALL DRAINAGE EXTENSION TO LOW CHAINAGE ABUTMENT WALL DRAINS AS SHOWN ON DRAWING 3.
5. REMOVE EXISTING GABION BASKETS FROM THE UPSTREAM AND DOWNSTREAM LOCATIONS ON THE LOW CHAINAGE END OF BRIDGE. REPLACE WITH NEW ROCK RETAINING WALL AS SHOWN ON DRAWING 2.
6. INSTALL PRECAST ROAD DRAINS AS SHOWN ON DRAWING 2.
7. REPAIR SPALLED AREAS ON EDGE OF SOFFIT AS SHOWN ON DRAWING 3.
8. REPAIR SPALLED AREA ON UPSTREAM HIGH CHAINAGE WINGWALL AS SHOWN ON DRAWING 3.
9. REMOVE GRAFFITI FROM ABUTMENT WALLS AS SHOWN ON DRAWING 2.

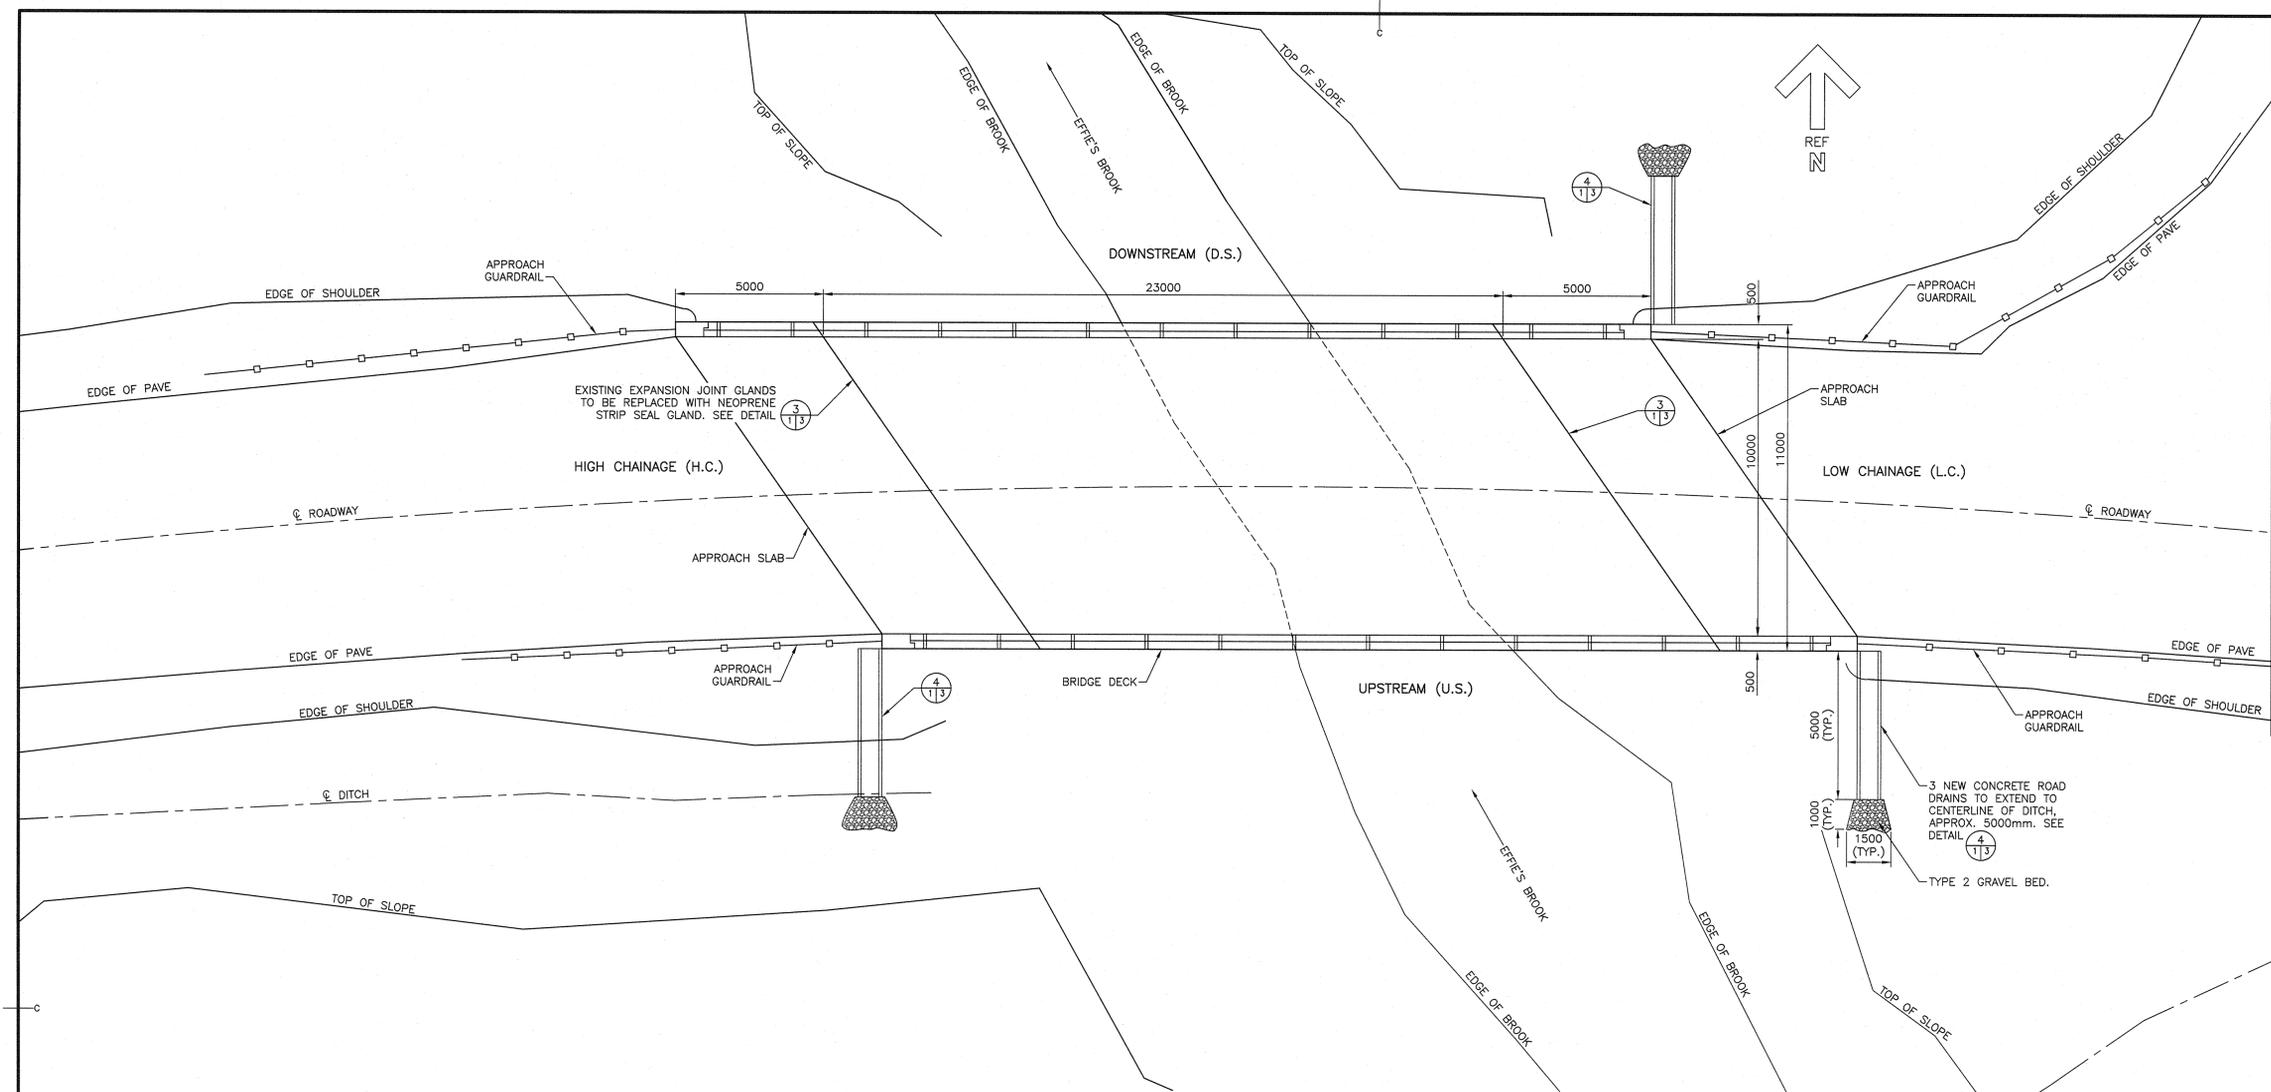

SITE PLAN
SCALE: 1:100

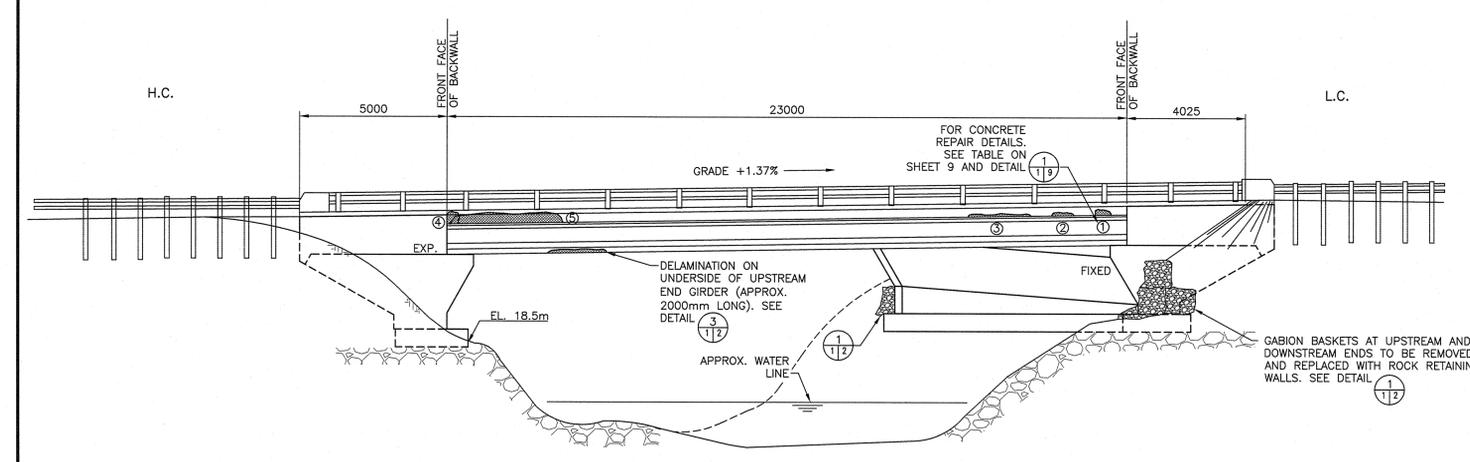

ELEVATION LOOKING DOWNSTREAM
SCALE: 1:100

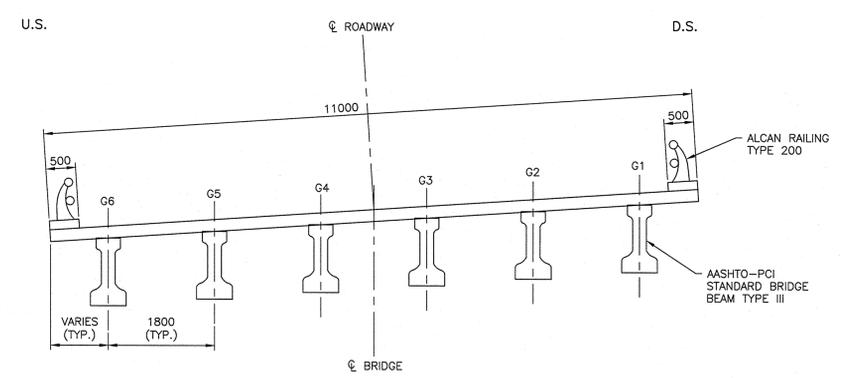

TYPICAL SECTION
SCALE: 1:50



0	ISSUED FOR TENDER	06/03/2015
revisions		date

project
STILL BROOK, EFFIES BROOK, HALFWAY BROOK, AND NORTH ASPY RIVER (NORTH) BRIDGE REHABILITATION
 CAPE BRETON HIGHLANDS NATIONAL PARK, NOVA SCOTIA

drawing
EFFIES BROOK BRIDGE SITE PLAN, ELEVATION, AND SECTION
 AND SECTION

designed VL	conçu
date JAN. 2, 2015	
drawn MM	dessiné
date JUNE 3, 2015	
approved	approuvé
date	
Tender	Submission

PWGSC Project Manager / Administrateur de projet TPSCG
 project number / no. du projet

R.072242.001

drawing no. / no. du dessin
1 of 9