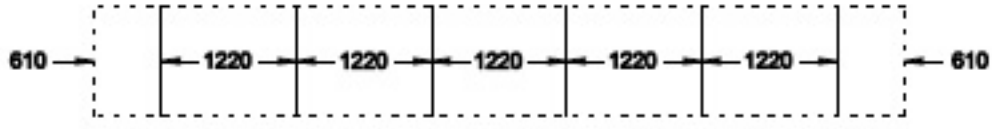
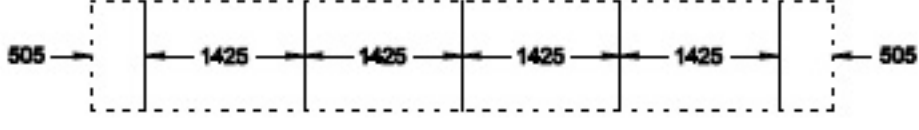
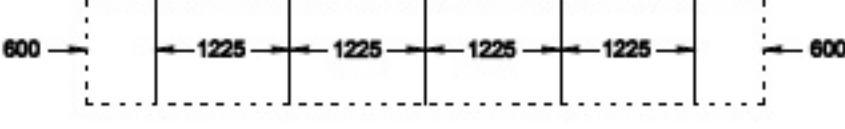
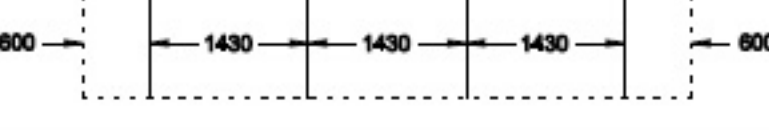
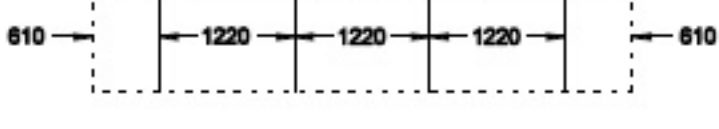
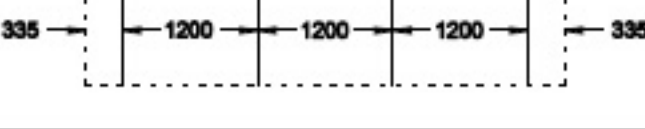
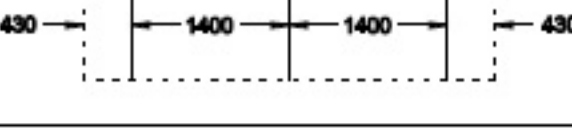
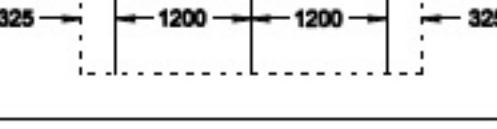





TYPICAL SIGN WIDTH	SPACING OF T-STIFFENERS (SEE NOTE 2)	NUMBER OF VERTICALS
7320 mm (24 ft)		6
6710 mm (22 ft)		5
6100 mm (20 ft)		5
5490 mm (18 ft)		4
4880 mm (16 ft)		4
4270 mm (14 ft)		4
3660 mm (12 ft)		3
3050 mm (10 ft)		3
2440 mm (8 ft)		2

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE NOTED.
2. T-STIFFENER SPACING FOR WIDER SIGNS WILL BE NOTED IN SPECIAL PROVISIONS.
3. T-STIFFENERS SHALL BE PLACED IN SUCH A WAY THAT THEY ARE SYMMETRICAL ABOUT THE VERTICAL CENTRELINE OF THE SIGN.

No.	DESCRIPTION	BY	DATE
 Parks Canada		DRAWING TCS-A4-335B	
		Date: October 2006	
TYPICAL T-STIFFENER SPACING FOR EXTRUDED ALUMINUM PANELS			
Prepared By: SL	Checked By: RC	Scale N.T.S.	SECTION A4