
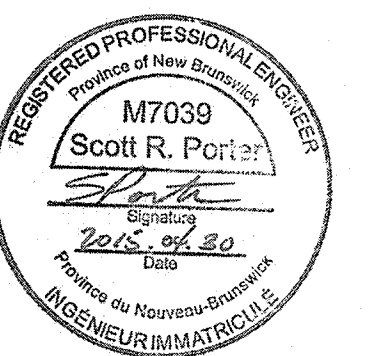
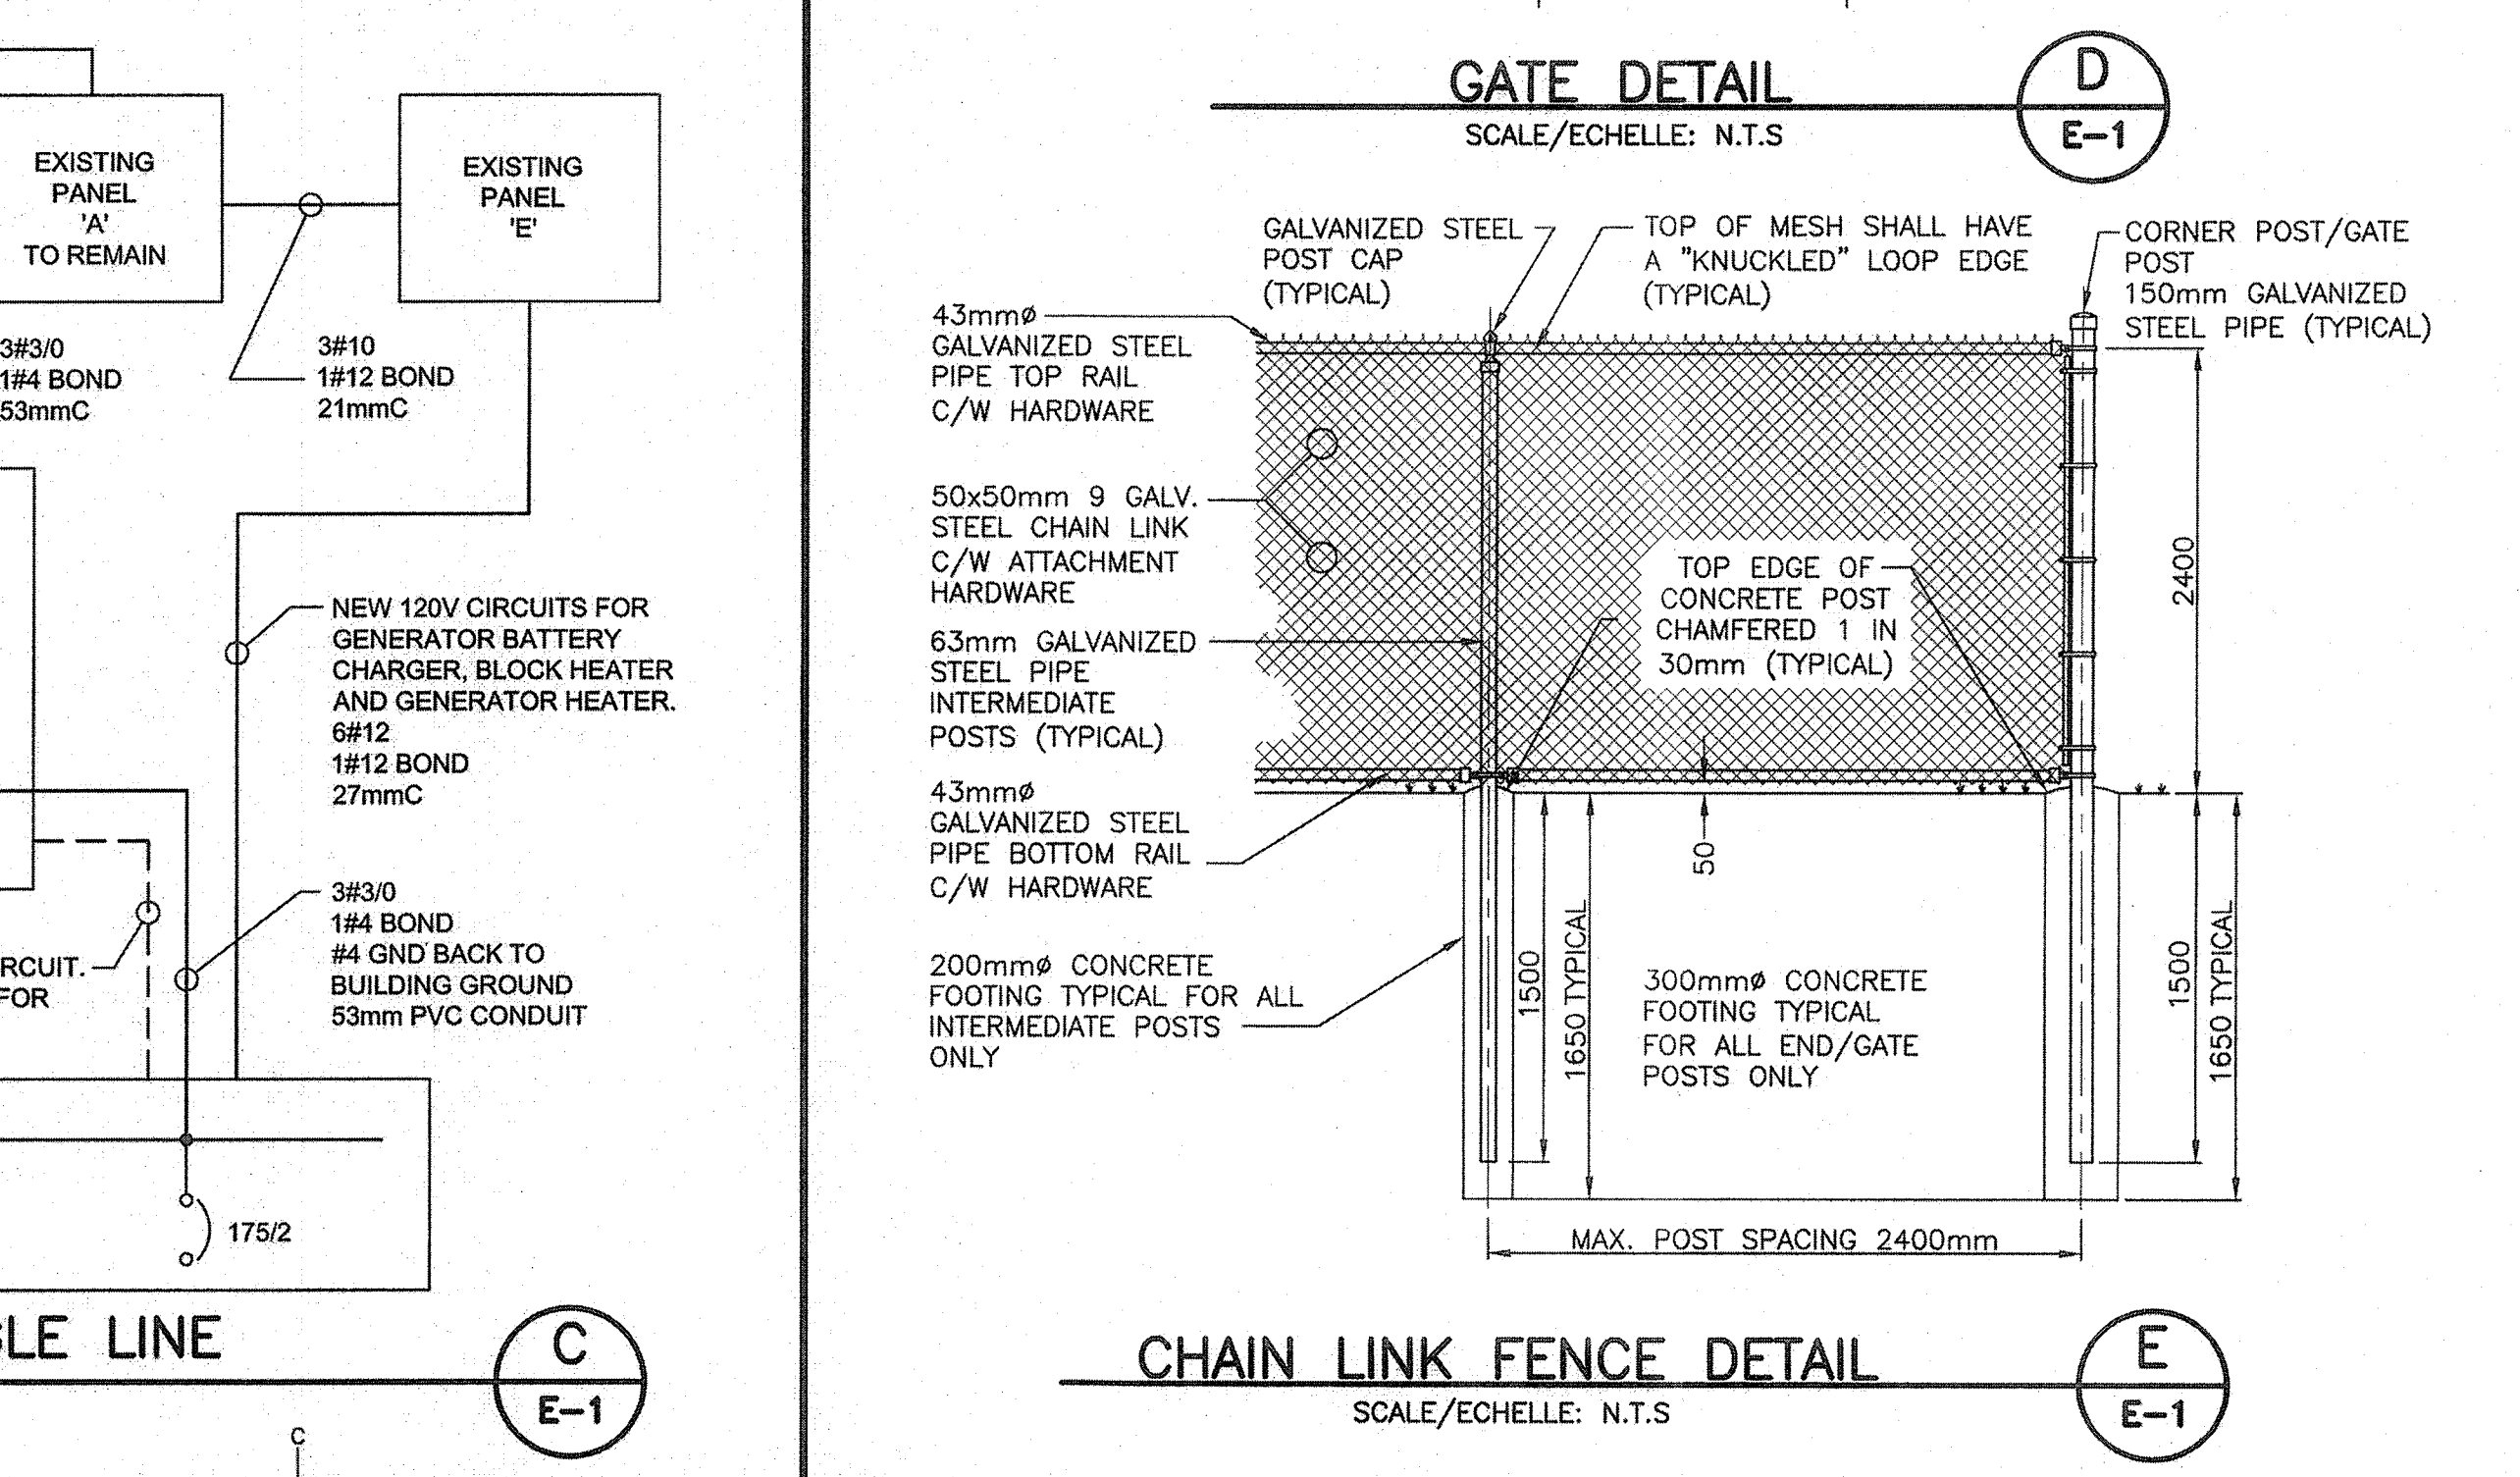
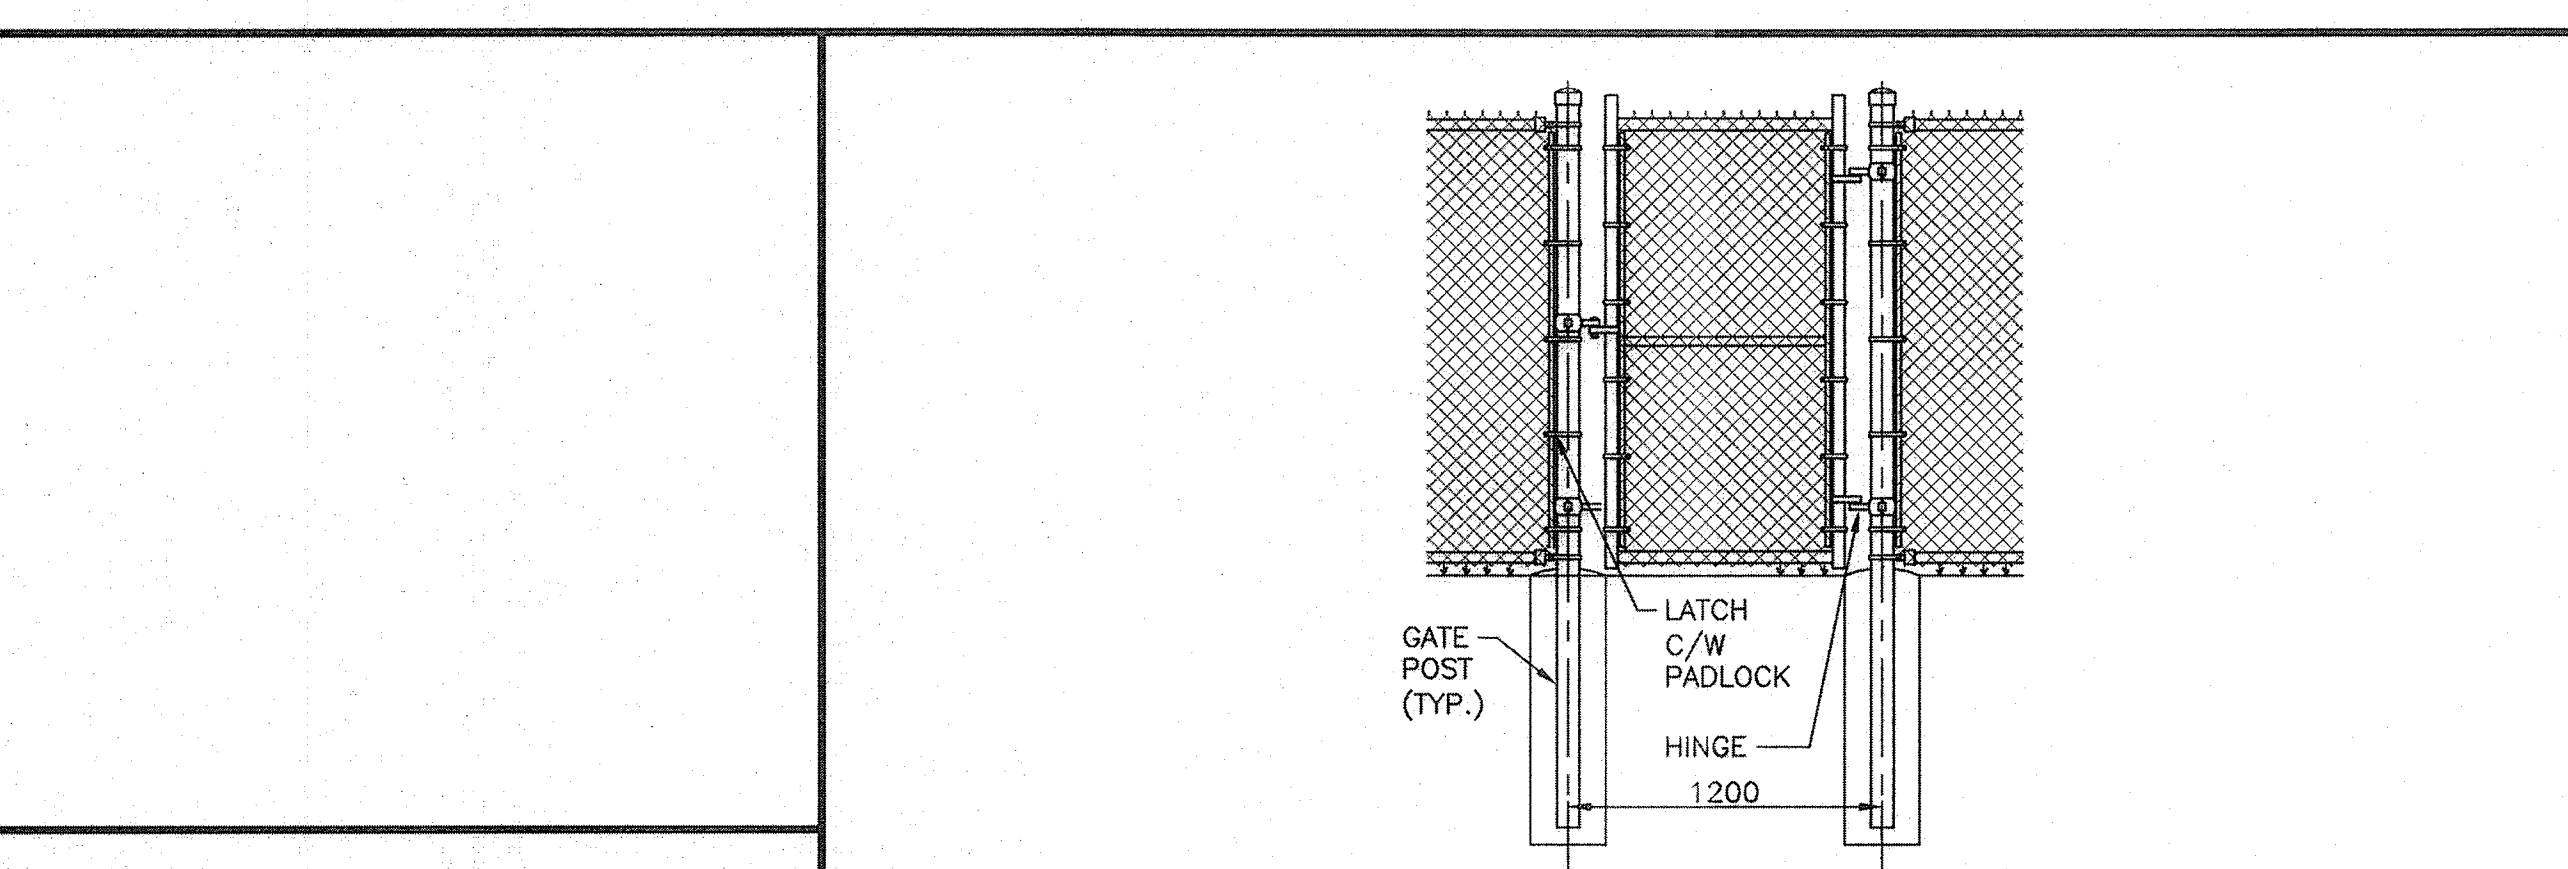


- KEYNOTES**
- EXISTING UTILITY METER TO REMAIN.
  - EXISTING PANEL 'A' C/W MAIN BREAKER TO REMAIN. REMOVE NEUTRAL BOND JUMPER.
  - EXISTING MANUAL TRANSFER SWITCH TO BE REMOVED. RELOCATE EXISTING JUNCTION BOX LABELED "PNL A OCT 35, PNL A OCT 19" TO ALLOW FOR EXISTING PANEL 'E' TO BE RELOCATED ADJACENT TO PANEL 'A'. PROVIDE SPLICE BOX TO EXTEND CIRCUITS AS REQUIRED. RE-FEED PANEL 'E' FROM EXISTING 2-POLE BREAKER IN PANEL 'A'.
  - NEW 200A, 240V, 1PH, 3W FUSED DISCONNECT SWITCH.
  - PROVIDE THREE (3) NEW 15A/1P BREAKERS IN PANEL 'E' TO FEED GENERATOR BATTERY CHARGER, BLOCK HEATER AND GENERATOR HEATER. EXISTING PANEL IS A FEDERAL PIONEER #NBLP8B.
  - CONTRACTOR RESPONSIBLE FOR RESTORING DISTURBED LANDSCAPING AND SITE CONDITIONS.

- GENERAL NOTES:**
- ALL WORK TO BE CARRIED OUT IN ACCORDANCE WITH LATEST EDITION OF CEC.
  - CONDUIT ROUTING SHOWN DIAGRAMMATICALLY. FIELD ROUTE AND VERIFY.
  - CONSTRUCTION BARRICADES TO BE ERECTED AROUND AREA OF WORK.
  - WORK MUST NOT INTERFERE WITH TRAFFIC OR BUILDING OPERATIONS.
  - CONTRACTOR IS RESPONSIBLE FOR LOCATING EXISTING UNDERGROUND SERVICES AND OBSTRUCTIONS.

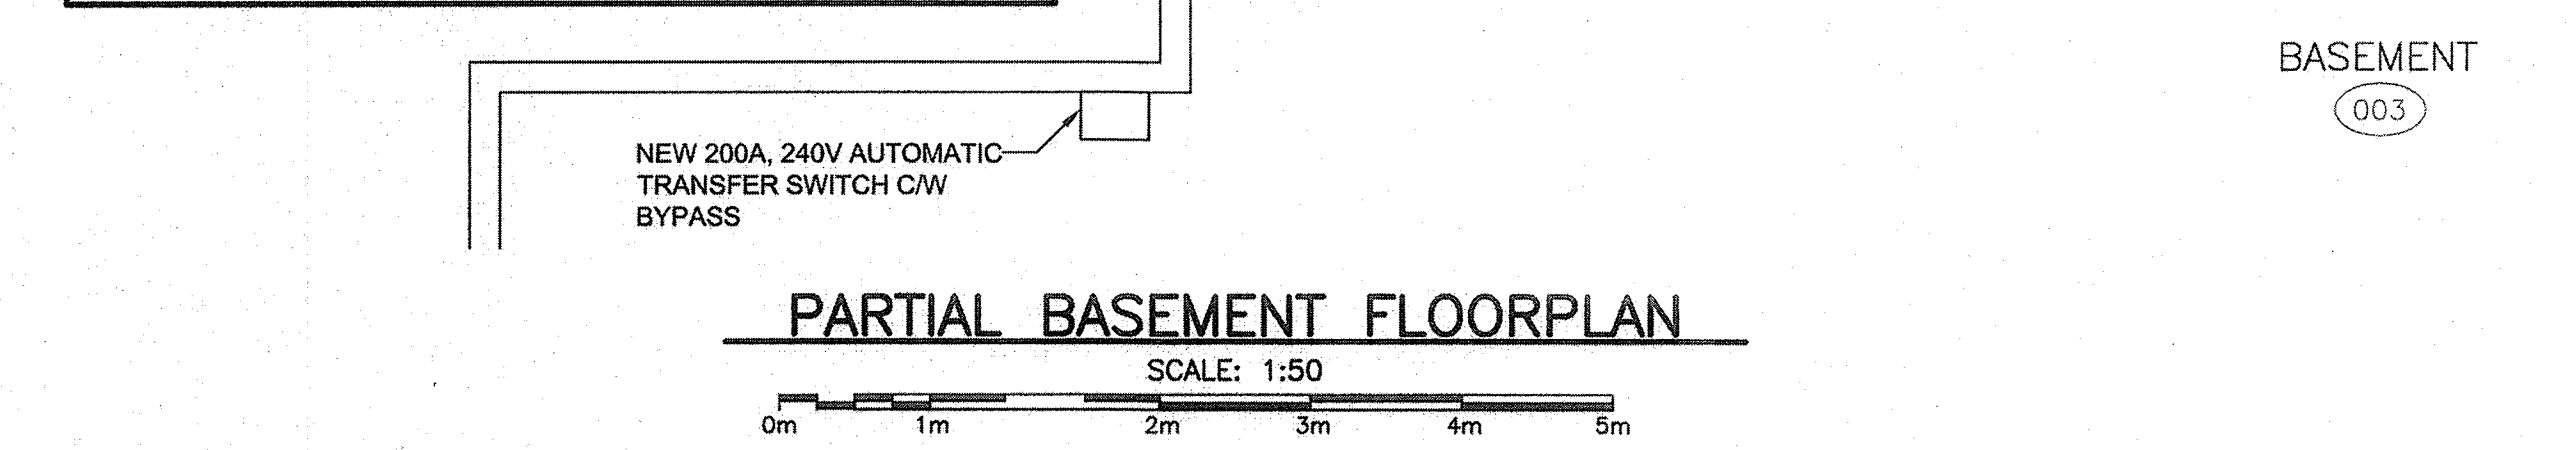

0	RELEASED FOR TENDER	APR.30 2015
revisions		date
project		project
<b>GRAND MANAN, INSTALL EMERGENCY GENERATOR</b>		
drawing		dessin
<b>ELECTRICAL PLAN AND DETAILS</b>		
designed M. GALLANT		conçu
date APRIL 2015		
drawn M. GALLANT		dessiné
date APRIL 2015		
approved		approuvé
date		
Tender		Soumission
PWGSC Project Manager		Administrateur de projets TPSGC
project number		no. du projet
		<b>R.061867.002</b>
drawing no.		no. du dessin
		<b>E-1</b>