


CCM PILIER #6 / PIER #6 MCC
VUE DE FACE / FRONT VIEW


1

BORNES DE RACCORDEMENT /
TERMINAL BLOCKS

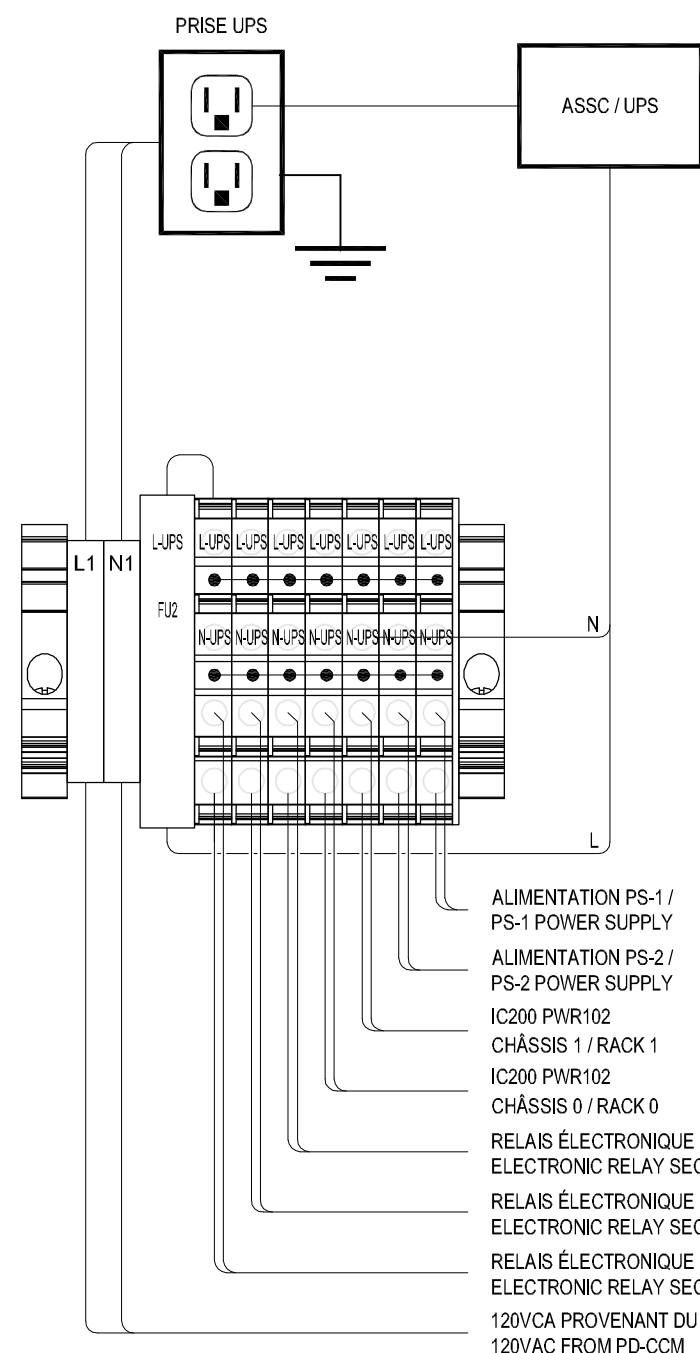

2

BORNES DE RACCORDEMENT /
TERMINAL BLOCKS

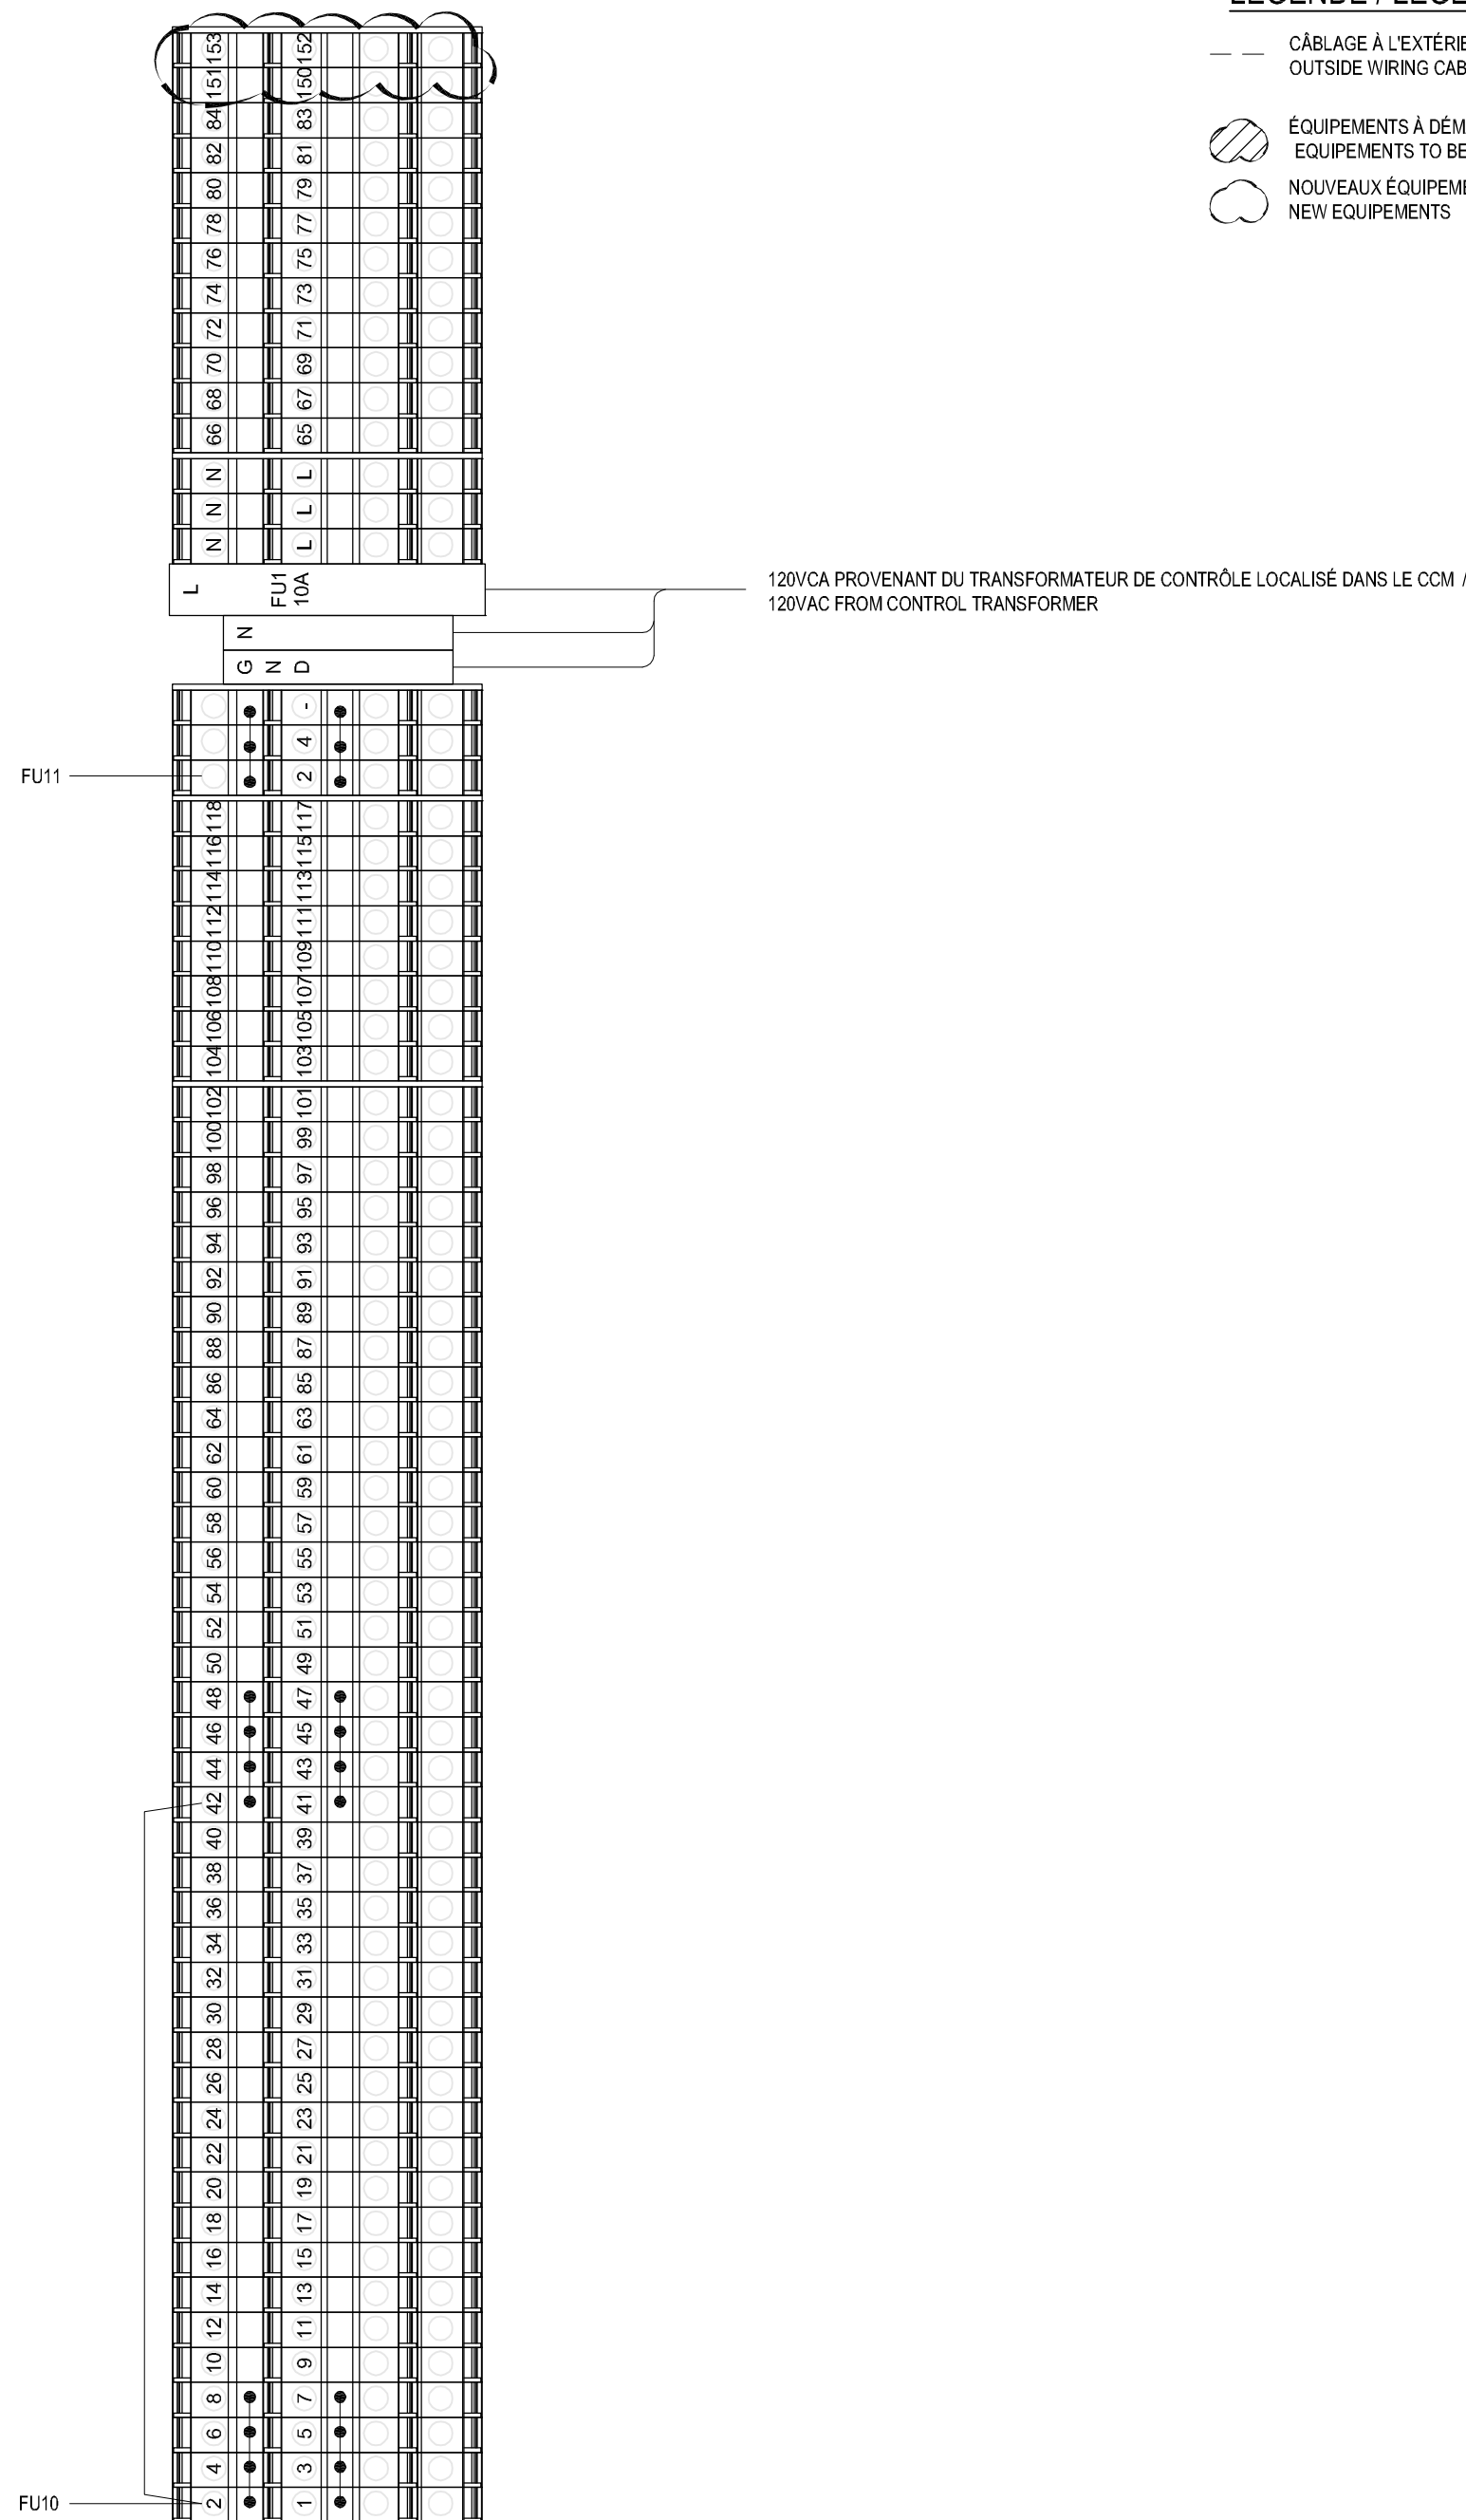

AUTOMATE / PLC LISTE DE MATÉRIEL / MATERIAL LIST						
ART.	QTÉ / QTY	MARQUE / MARQUE	MODÈLE / MODELE	DESCRIPTION / DESCRIPTION	FOURNI PAR / PROVIDED BY	INSTALLÉ PAR / INSTALLED BY
1	1	GE VERSAMAX	IC200ETM001	MODULE D'EXPANSION DE TRANSMISSION / EXPANSION TRANSMITTER MODULE	ENTREPRENEUR / CONTRACTOR	ENTREPRENEUR / CONTRACTOR
2	1	GE VERSAMAX	IC200CBL601	CÂBLE D'EXPANSION / EXPANSION CABLE	ENTREPRENEUR / CONTRACTOR	ENTREPRENEUR / CONTRACTOR
3	1	GE VERSAMAX	IC200ERM001	MODULE D'EXPANSION DE RÉCEPTION ISOLÉ / EXPANSION RECEIVER ISOLATED	ENTREPRENEUR / CONTRACTOR	ENTREPRENEUR / CONTRACTOR
4	1	GE VERSAMAX	IC200PVR102	MODULE D'ALIMENTATION ENTRÉE 120/240 VCA / POWER SUPPLY 120/240 VAC INPUT	ENTREPRENEUR / CONTRACTOR	ENTREPRENEUR / CONTRACTOR
5	1	GE VERSAMAX	IC200BEM103	MODULE DEVICENET / DEVICENET MASTER MODULE	ENTREPRENEUR / CONTRACTOR	ENTREPRENEUR / CONTRACTOR
6	1	GE VERSAMAX	IC200CHS006	SUPPORT DE MODULE / COMMUNICATION CARRIER	ENTREPRENEUR / CONTRACTOR	ENTREPRENEUR / CONTRACTOR
7	2	PHOENIX CONTACT	2868651 / 2868664	BLOC D'ALIMENTATION 24 VDC, 2.5 A / 24 VDC, 2.5 A POWER SUPPLY - 4.2 A / 24 VDC, 4.2 A POWER SUPPLY	ENTREPRENEUR / CONTRACTOR	ENTREPRENEUR / CONTRACTOR
8	1	FUNCTIONAL DEVICES	R18M24S	RELAIS D'INTERFACE AVEC INTERRUPTEUR AUTO-OFF-ON / INTERFACE RELAY WITH SWITCH AUTO-OFF-ON	ENTREPRENEUR / CONTRACTOR	ENTREPRENEUR / CONTRACTOR
9	LOT	GRAVOPLY	-	PLAQUE D'IDENTIFICATION GRAVOPLY SELON INSCRIPTION AU DESSIN / NAMEPLATE SEE DRAWING FOR INSCRIPTION	ENTREPRENEUR / CONTRACTOR	ENTREPRENEUR / CONTRACTOR
10	LOT	COMME EXISTANT / AS EXISTING	COMME EXISTANT / AS EXISTING	RAIL DIN / DIN RAIL	ENTREPRENEUR / CONTRACTOR	ENTREPRENEUR / CONTRACTOR
11	LOT	COMME EXISTANT / AS EXISTING	COMME EXISTANT / AS EXISTING	BORNE FUSIBLE AVEC FUSIBLE / TERMINAL BLOCK WITH FUSE	ENTREPRENEUR / CONTRACTOR	ENTREPRENEUR / CONTRACTOR
12	LOT	COMME EXISTANT / AS EXISTING	COMME EXISTANT / AS EXISTING	BORNE DE RACCORDEMENT / TERMINAL BLOCK	ENTREPRENEUR / CONTRACTOR	ENTREPRENEUR / CONTRACTOR
13	LOT	COMME EXISTANT / AS EXISTING	COMME EXISTANT / AS EXISTING	FLASQUE DE FERMETURE / CLOSING FLANGE	ENTREPRENEUR / CONTRACTOR	ENTREPRENEUR / CONTRACTOR
14	LOT	COMME EXISTANT / AS EXISTING	COMME EXISTANT / AS EXISTING	ÉQUERRE DE BLOCAGE / BLOCKING FLANGE	ENTREPRENEUR / CONTRACTOR	ENTREPRENEUR / CONTRACTOR
15	LOT	COMME EXISTANT / AS EXISTING	COMME EXISTANT / AS EXISTING	GOULOTTE AVEC COUVERCLE / TRAY WITH COVER	ENTREPRENEUR / CONTRACTOR	ENTREPRENEUR / CONTRACTOR
16	TQR	-	-	QUINCAILLERIE DIVERSES / MISCELLANEOUS HARDWARE	ENTREPRENEUR / CONTRACTOR	ENTREPRENEUR / CONTRACTOR

NOTE: LE MATÉRIEL FOURNI PAR "APC" CORRESPOND AU MATÉRIEL RÉCUPÉRÉ DE LA SECTION DE 610 mm DÉMANTÉE /
MATERIAL PROVIDED BY "APC" MATCHES THE MATERIAL RECOVERED FROM THE SECTION OF 610 mm REMOVED.

LÉGENDE / LEGEND

--- CÂBLAGE À L'EXTÉRIEUR DU CABINET /
OUTSIDE WIRING CABINET

ÉQUIPEMENTS À DÉMANTÉLER /
EQUIPMENTS TO BE REMOVED

NOUVEAUX ÉQUIPEMENTS /
NEW EQUIPMENTS




Voies navigables au Québec
Quebec Waterways

Légende:

Legend:

Mod.	Description	Date
4	POUR SOUMISSION, REMPLACEMENT CCM PILIER 2/ FOR BID, MCC REPLACEMENT PIER 2	2015-08-03
3	RÉVISION GÉNÉRALE / GENERAL REVIEW	2015-03-31
2	DESSIN EN PROGRESSION POUR APPEL D'OFFRE FUTUR	2014-12-19
1	POUR COMMENTAIRES 99% / FOR 99% COMMENTS	2014-11-07
0	POUR COMMENTAIRES / FOR COMMENTS	2014-09-18

A. No du détail
B. Localisation
C. Sur feuille No



A. Detail No
B. Localisation
C. On sheet No

Conception:	R. GUÉRIN, ing.	Design:
Dessiné par:	C. TOUCHETTE	Drawn by:
Vérifié par:	M. BELLAVANCE, ing.	Checked by:



1175, BOULEVARD LEBOURGNEUF, BUREAU 300
QUÉBEC (QUÉBEC) CANADA G2K 0B4
TÉL. : 418 780-0678 | TÉLÉC. : 418 780-4182 | WWW.WSPGROUP.COM

Projet:

Project:

REMPLACEMENT DES CENTRES
DE CONTRÔLE DE MOTEUR PAR
PILIER DU BARRAGE DU CANAL
SAINT-OURS /
MOTORS CONTROL CENTERS
REPLACEMENT PER PIERS
AT SAINT-OURS CANAL DAM

Titre du dessin:

Drawing title:

PILIER 2 / PIER 2
CABINET AUTOMATE / PLC CABINET
VUE DE FAÇADE / FRONT VIEW

Date:

2014-08-01

Feuille:

1 / 2

Échelle :

Scale:

AUCUNE / NONE

Réf. Consultant:

Ref. Consultant:

121-18486-03

Sheet:

No de référence:
Ministère:

Reference no
Ministry:

121-18486-03-E-203