

1  
A010/A015  
ENLARGED DEMOLITION SITE PLAN  
1:500

ENLARGED DEMOLITION SITE PLAN LEGEND

	EXISTING VEGETATION TO REMAIN
	EXISTING VEGETATION TO BE REMOVED, REFER TO CIVIL REMOVAL DRAWING
	EXISTING VEGETATION TO REMAIN
	EXISTING BEACHFRONT TO REMAIN
	EXISTING COMFORT STATION OR PAVILION STRUCTURE TO BE DEMOLISHED
	EXISTING ROAD TO REMAIN
	EXISTING ASPHALT, BRICK PAVER OR GRAVEL LANE WAY TO BE REMOVED, REFER TO CIVIL REMOVAL DRAWING
	EXISTING SEPTIC BED TO BE REMOVED, REFER TO CIVIL DRAWINGS.

ENLARGED DEMOLITION SITE PLAN NOTES

- 1 EXISTING COMFORT STATION OR SHELTER STRUCTURE TO BE DEMOLISHED.
- NOTE: ASBESTOS REMOVAL IS REQUIRED IN THE COMFORT STATIONS, REFER TO SPECIFICATIONS FOR HAZARDOUS MATERIALS REPORT.
- 2 EXISTING ASPHALT LANE WAY TO BE REMOVED, REFER TO CIVIL REMOVAL DRAWING.
- 3 EXISTING INTERLOCKING BRICK PAVERS TO BE REMOVED. REFER TO CIVIL REMOVAL DRAWING.
- 4 EXISTING GRAVEL LANE WAY TO BE REMOVED. REFER TO CIVIL REMOVAL DRAWING.
- 5 EXISTING INTERLOCKING BRICK PAVERS TO REMAIN.
- 6 EXTENT OF NEW ASPHALT LANE WAY AND PARKING AREA, CLEAR VEGETATION TO ACCOMMODATE NEW CONSTRUCTION, REFER TO CIVIL AND LANDSCAPE DRAWINGS.
- 7 EXISTING UNDERGROUND HYDRO LINE AND HYDRO POLE TO BE REMOVED.
- 8 EXISTING SEPTIC BED TO BE REMOVED.
- 9 GRAVEL SUB-BASE AREA TO BE EXCAVATED AND REMOVED. REFER TO A010 OVERALL DEMOLITION SITE PLAN FOR EXTENT

MECHANICAL DEMOLITION SITE PLAN NOTES


- M1 ALL EXISTING MECHANICAL ITEMS (PLUMBING FIXTURES, FANS, LOUVERS/GRILLES, DUCTWORK, PUMPS, PIPING, ETC.) TO BE DISCONNECTED & REMOVED COMPLETE TO SUIT DEMOLITION OF COMFORT STATION.
- M2 INDICATES EXISTING CW SERVICE TO COMFORT STATION. PIPING TO BE UNCOVERED & REMOVED BACK +/-9m (30 FT) FROM PERIMETER OF COMFORT STATION, AND VALVED & CAPPED FOR USE IN FUTURE SITE RE-DEVELOPMENT.
- M3 EXISTING SEPTIC TANKS, ANY DISTRIBUTION STATION TO BE ABANDONED IN PLACE. REMOVE ALL SANITARY PIPING COMPLETE. SEPTIC TANKS & DISTRIBUTION STATION TO BE PUMPED OF ALL CONTENTS. REMOVE CONCRETE LIDS COMPLETE AND CRUSH TANK BOTTOM SO TANK WILL NOT RETAIN WATER. TANKS/DISTRIBUTION STATION TO BE BACKFILLED WITH NATIVE SOIL.
- M4 EXISTING SEPTIC BE TO BE EXCAVATED & REMOVED COMPLETE. BACKFILL WITH NATIVE SOIL.

ELECTRICAL DEMOLITION SITE PLAN NOTES

- E1 TO SUIT DEMOLITION OF COMFORT STATION ALL ELECTRICAL DEVICES (LIGHT FIXTURES AND WIRING DEVICES) ARE TO BE DISCONNECTED AND REMOVED. REMOVE WIRING BACK TO SOURCE PANEL WITHIN COMFORT STATION.
- E2 WITHIN THE COMFORT STATION THE EXISTING ELECTRICAL PANEL IS TO BE DISCONNECTED AND REMOVED. CO-ORDINATE WITH LOCAL UTILITY TO HAVE THE SERVICE AT THIS POLE ISOLATED AND MADE SAFE. INCLUDE ALL UTILITY COSTS IN BID. MAINTAIN POLE AND CURRENT SERVICE TO IT. RE-WORK WILL BE PART OF SITE RE-DEVELOPMENT.
- E3 INDICATES EXISTING UNDERGROUND FEED TO COMFORT STATION. EXCAVATE TO UNCOVER FEED AND REMOVE BACK +/-9m (30 FT) FROM PERIMETER OF COMFORT STATION. CAP AND STAKE LOCATION FOR USE IN FUTURE SITE RE-DEVELOPMENT.

Public Works and Government Services Canada  
Travaux publics et Services gouvernementaux Canada

Brantford Studio K-W Studio  
127 Brant Ave., Brantford, ON N3T 3H5 290 King St. E., Suite 201, Kitchener, ON N2G 2L3  
519.756.6331 1.877.789.6962 519.575.2227 1.877.789.6662  
www.mmmc.on.ca

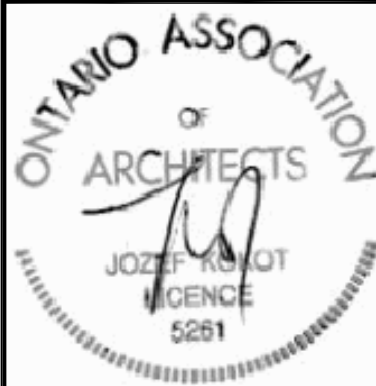

04		
03		
02		
01	ISSUED FOR BID	31/07/15
revision		date

Do not scale drawings.  
Verify all dimensions and conditions on site and immediately notify the Departmental Representative of all discrepancies.

A	Detail No.
B	No. du détail
C	drawing no. — where detail required dessin no. — où détail exigé
	drawing no. — where detailed dessin no. — où détaillé

project title  
titre du projet  
LEAMINGTON Ontario  
POINT PEELE NATIONAL PARK  
NORTHWEST BEACH IMPROVEMENTS  
PHASE 1

drawing title  
titre du dessin  
ENLARGED DEMOLITION  
SITE PLAN

drawn by  
dessiné par  
designed by  
conc par J.K.

approved by  
approuvé par

bid  
offre project manager  
administrateur de projets

project date  
date du projet 2015-07-24

project no.  
no. du projet R.074203.001

drawing no.  
dessiné no. A015