

GENERAL NOTES, A20


- A. REMOVE ALL INTERIOR PARTITION WALLS INCLUDING ANY PLENUM BARRIERS, FLOOR BASE, WALL MOUNTED ACCESSORIES, SIGNAGE, DOORS, FRAMES, & SIDELIGHTS.
- B. BASE BUILDING WALLS ARE TO REMAIN AS INDICATED ON THE DRAWING. REMOVE ALL FLOOR BASE AND WALL MOUNTED ACCESSORIES. REPAIR AS REQUIRED. REMOVE ALL ACM I.E. JOINT COMPOUND GYPSUM BOARD ON PERIMETER WALLS. TYPICAL. REPLACE WITH NEW 16mm GYPSUM BOARD. REMOVE AND REINSTATE BASEBOARD PERIMETER HEATING UNITS AS REQUIRED TO ENABLE GYPSUM BOARD REPLACEMENT. TAPE, FINISH, PRIME.
- C. REFER TO ELECTRICAL FOR LOCATIONS AND INSTRUCTIONS FOR REMOVAL OF EXISTING ELECTRICAL FLOOR MONUMENTS.
- D. REFER TO ELECTRICAL FOR INSTRUCTIONS ON THE REMOVAL/RELOCATION OF EXISTING EQUIPMENT, LIGHTING, FIRE ALARMS, ETC.
- E. REMOVE ALL SECURITY CONDUIT AND SECURITY WIRING. REFER TO ELECTRICAL.
- F. REFER TO MECHANICAL FOR INSTRUCTIONS ON THE REMOVAL/RELOCATION OF EXISTING DUCTWORK, DIFFUSERS, THERMOSTATS, PLUMBING, ETC.
- G. REMOVE ALL FLOOR FINISHES AND ADHESIVES EXCEPT WHERE NOTED OTHERWISE. VINYL COMPOSITE FLOOR TILES SHOULD BE ASSUMED TO CONTAIN ASBESTOS UNLESS PROVEN OTHERWISE; REFER TO DSR, SPEC. SECTION 01 14 25
- H. REMOVE ALL BUILT-IN, FREESTANDING AND WALL MOUNTED MILLWORK (TYPICAL).
- I. REMOVE ALL WALL MOUNTED MIRRORS (TYPICAL).
- J. PROVIDE FIRE STOPPING WHERE REMOVED ITEMS PENETRATED THE SLAB.
- K. REMOVE ALL PLUMBING FIXTURES (TYPICAL). RETAIN SERVICES (HOT AND COLD WATER SUPPLY, DRAINS, EXHAUST, ETC.). REFER TO MECHANICAL.
- L. REMOVE ALL COLUMN COVERINGS AND PAINT DOWN TO THE STRUCTURE (TYPICAL). REPAIR AS REQUIRED.
- M. RETAIN GLAZED WALL AND DOOR ASSEMBLY SEPARATING COMMERCIAL MALL AREA FROM AREA OF WORK. PROTECT DURING DEMOLITION. REPAIR ANY DAMAGED CAUSED BY DEMOLITION WORK.

DRAWING NOTES, A20

1. REMOVE FULL HEIGHT GLASS AND/OR MIRROR
2. REMOVE FULL HEIGHT MIRROR AROUND COLUMN PERIMETER
3. REMOVE MIRRORED DOOR
4. LOCATION OF EXISTING ELECTRICAL PANEL(S) TO REMAIN. SEE ELECTRICAL.
5. LOCATION OF TELECOM PANEL. SEE ELECTRICAL.
6. PAINT TO BE REMOVED.
7. LOW PLATFORM TO BE REMOVED.
8. REMOVE VERTICAL FLUORESCENT LIGHTS INSIDE CASE (6 EACH CASE).
9. EXISTING TALL BUILT-IN CABINETS TO BE REMOVED.
10. EXISTING MILLWORK AND SINK TO BE REMOVED. REMOVE MIRROR ABOVE SINK. SEE MECHANICAL.
11. FIRE HOSE CABINET AND PLUMBING TO REMAIN (TYPICAL). REFER TO MECHANICAL.
12. GLASS DISPLAY CASE DOORS (APPROX. 600 X 600MM) TO BE REMOVED.
13. EXISTING DRINKING FOUNTAIN TO BE REMOVED.
14. PROTECT EXISTING SLATE FLOOR AND STAIRS TO BE RETAINED.
15. REMOVE AND RELOCATE EXISTING THERMOSTAT. SEE MECHANICAL.
16. WOOD CUBICLE DIVIDERS, NOMINALLY 2M HIGH TO BE REMOVED.
17. CERAMIC DISPLAY SHELVES TO BE REMOVED. APPROX. 3 TILES APPROX. EVERY 2 LINEAR FEET ALONG ENTIRE LENGTH OF WALL.
18. EXISTING COUNTER-HEIGHT BUILT-IN MILLWORK TO BE REMOVED (TYPICAL).
19. EXISTING FREESTANDING MILLWORK AND/OR CABINETS TO BE REMOVED (TYPICAL).
20. EXISTING FULL HEIGHT RETAIL PRODUCT DISPLAY SUPPORT POSTS TO BE REMOVED.
21. REMOVE ALL EXISTING PLUMBING FIXTURES, WASHROOM PARTITIONS AND DOORS, WASHROOM ACCESSORIES, WALL MOUNTED MIRROR.
22. RETAIN AND PROTECT EXISTING DOORS
23. RETAIN AND PROTECT EXISTING GLAZED PARTITION

LEGEND, A20

- ROLL CARPET TO BE REMOVED.
- HARDWOOD FLOORING TO BE REMOVED
- CERAMIC TILE TO BE REMOVED.
- EXPOSED CONCRETE TO REMAIN
- RESILIENT TILE TO BE REMOVED.
- LAMINATE TYPE FLOORING TO BE REMOVED
- QUARRY TILE TO BE REMOVED
- PAINTED WOOD RAISED FLOOR IN DISPLAY AREA TO REMAIN

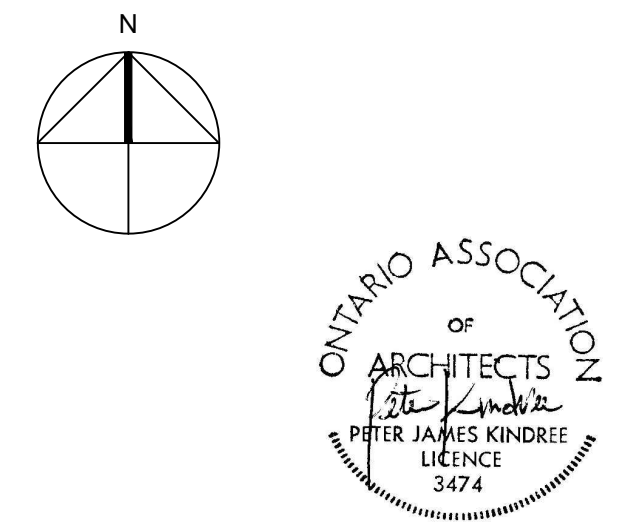

L'ENTREPRENEUR DEVRA VÉRIFIER TOUTES LES DIMENSIONS ET LES CONDITIONS SUR LE CHANTIER ET AVISER SANS DÉLAI LE REPRÉSENTANT DU MINISTÈRE DE TOUTE ANOMALIE.
Contractor to verify all dimensions and conditions on site and immediately notify the departmental representative of all discrepancies.

revisions	description	date
6		
5		
4		
3	ISSUED FOR TENDER	2015/06/30
2	ISSUED FOR 90% REVIEW	2015/06/01
1	ISSUED FOR 66% REVIEW	2015/05/22

A	A
C	B C

project
CD HOWE BLDG
LEVELS C2 & C3
DEMOLITION
OTTAWA, ONTARIO

drawing
LEVEL C3
DEMOLITION FLOOR
PLAN

Designed By Date PK/DL MAY /15	Conçu par (yyyy/mm/dd)
Drawn By Date JB MAY /15	Dessiné par (yyyy/mm/dd)
Reviewed By Date DL MAY /15	Examiné par (yyyy/mm/dd)
Approved By Date DL MAY /15	Approuvé par (yyyy/mm/dd)
Tender	Soumission
Project Manager STEPHANIE CORMIER	Administrateur de projets
Project no. R077051.3	No. du projet
Drawing no. A20	No. du dessin

1 LEVEL C3 DEMOLITION FLOOR PLAN
A20
SCALE 1:100

