

revisions	date
project	projet

**BUNKER C TANK
DECOMMISSIONING**
DORCHESTER MEDUIM
DORCHESTER, NB

drawing dessin


**PARTIAL PLANS AT
NEW ROOF ACCESS HATCH**

designed RBV	Conçu
date SEPT. 2015	
drawn RK	dessiné
date SEPT. 2015	
approved JMC	approuvé
date OCT. 2015	
Tender	Soumission
PWGSC Project Manager	Administrateur de projets TPSGC
project number	no. du projet

R.61874.001

drawing no. no. du dessin

S2

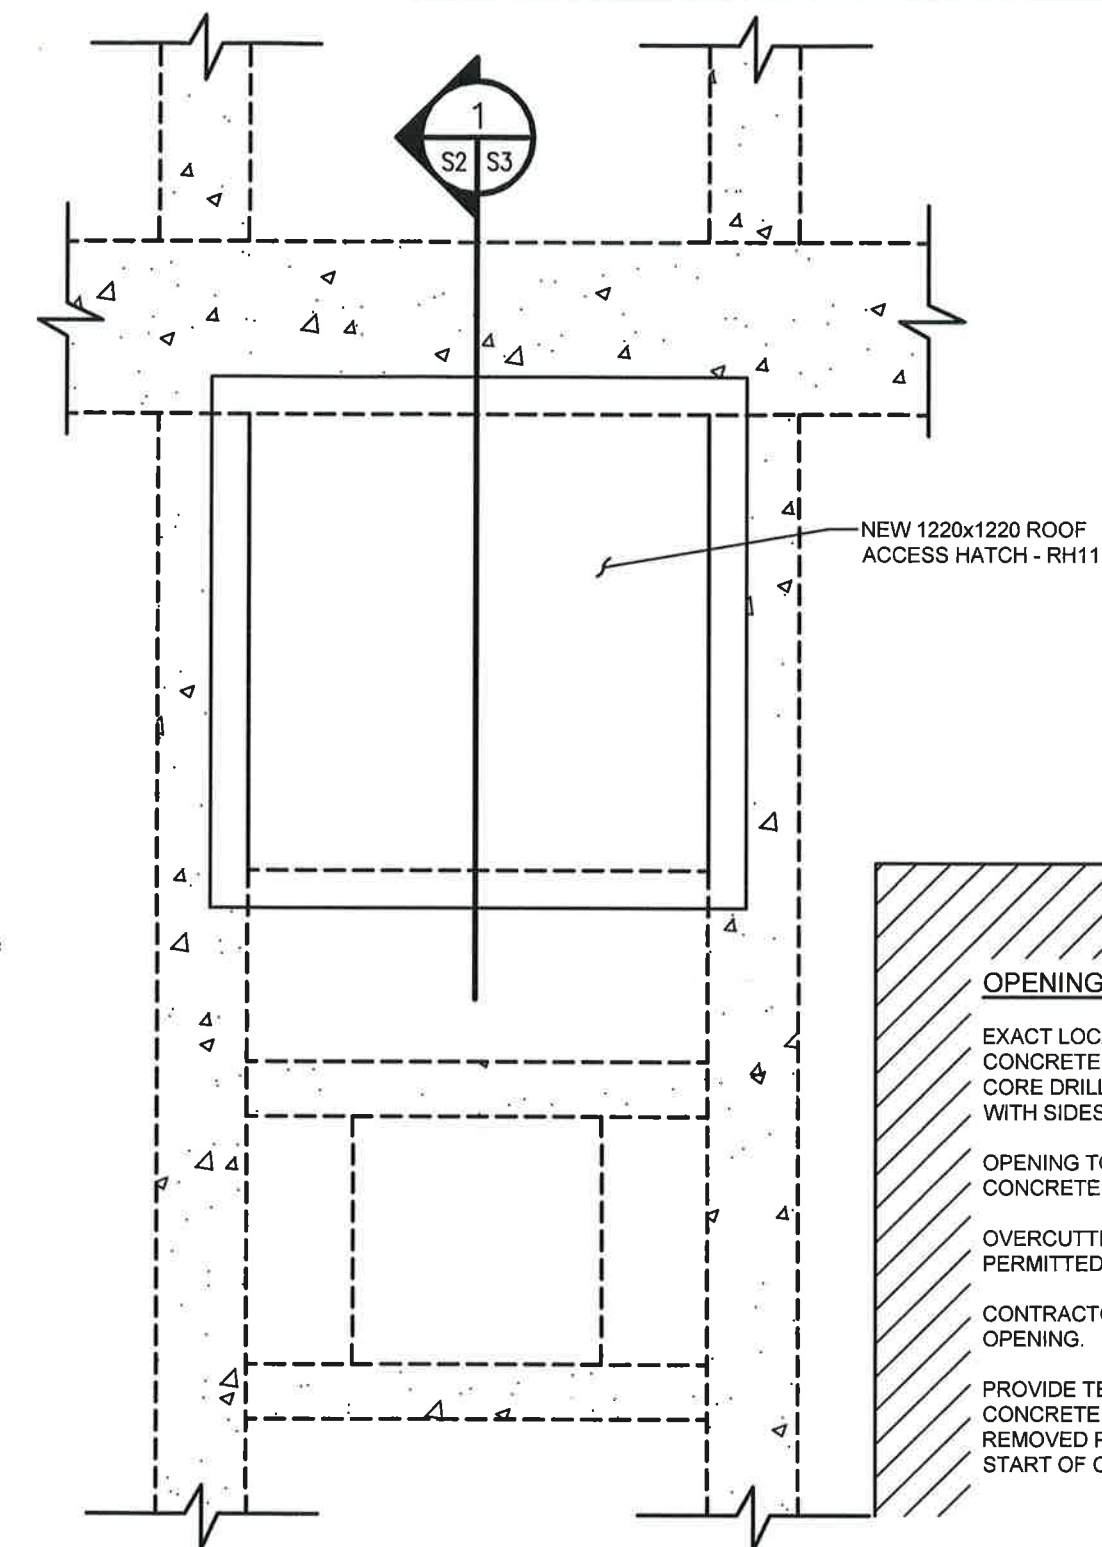

**PARTIAL PLAN -
NEW ACCESS HATCH**

SCALE/ÉCHELLE: 1:20

0mm 500mm 1000mm 1500mm 2000mm 2500mm

CONCRETE SLAB SECTION
- TO BE REMOVED BY
SAW-CUTTING.

SAWCUT

CORE DRILL CORNERS TO
PREVENT SAW-OVERRUN.

OPENING IN CONCRETE SLAB:

EXACT LOCATION OF OPENING THROUGH EXISTING
CONCRETE TO BE FIELD CONFIRMED PRIOR TO
CORE DRILLING AND CUTTING. MAKE CUTS FLUSH
WITH SIDES OF EXISTING ROOF BEAMS - 3 SIDES.

OPENING TO BE CUT USING PURPOSE-MADE
CONCRETE SAW. SAWCUT FULL DEPTH.

OVERCUTTING AT CORNERS OF OPENING IS NOT
PERMITTED.


CONTRACTOR TO CORE DRILL CORNERS OF
OPENING.

PROVIDE TEMPORARY MEANS OF SUPPORT OF
CONCRETE SECTION TO BE CUT OUT AND
REMOVED PRIOR TO
START OF CUTTING.

**REMOVALS - NEW OPENING
REFLECTED ROOF PLAN**

SCALE/ÉCHELLE: 1:20

0mm 500mm 1000mm 1500mm 2000mm 2500mm

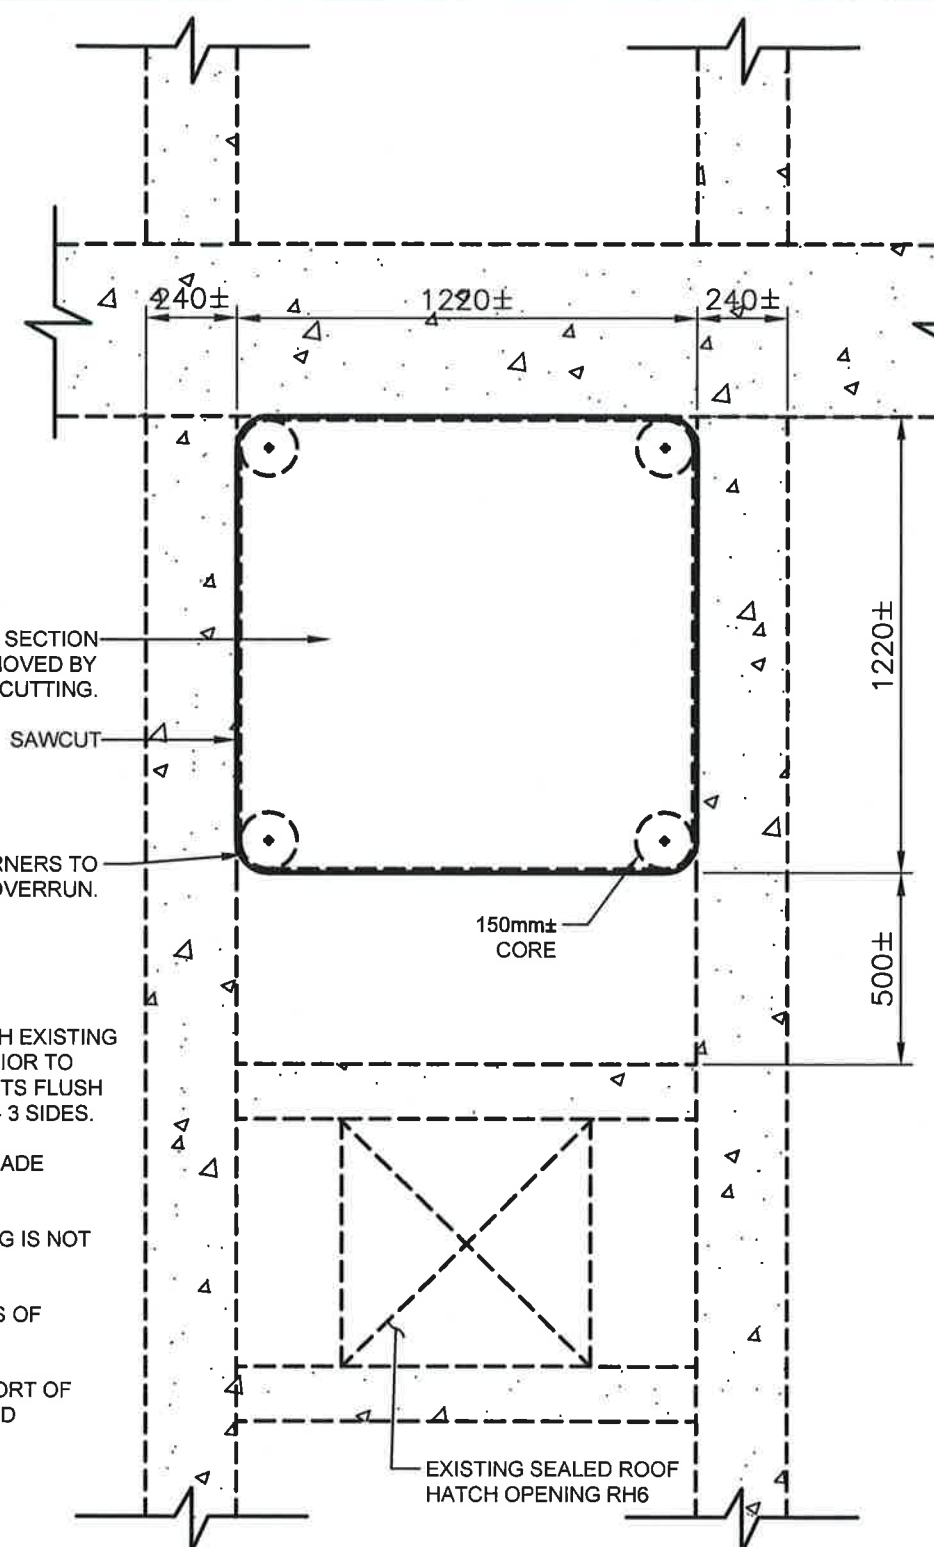

150mm±
CORE

EXISTING SEALED ROOF
HATCH OPENING RH6