


REMOVE EXISTING ROOFING SYSTEM IN LOCALIZED AREA OF HATCH.

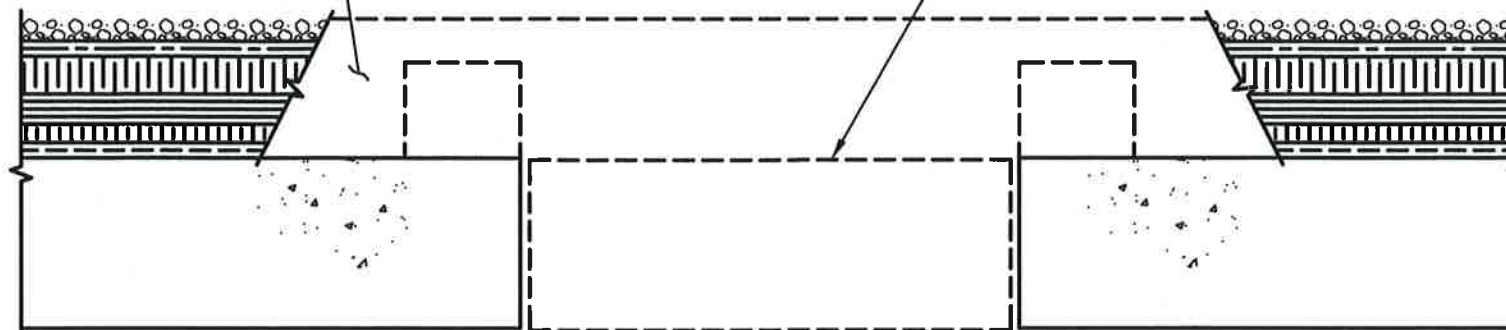

NOTE: HATCH OPENING MAY BE SEALED WITH CONCRETE. REMOVE BY SAW-CUTTING PERIMETER OF CONCRETE INFILL. (SIMILAR PROCEDURE AS SPECIFIED FOR NEW ACCESS OPENING.)

REMOVALS – EXISTING HATCH OPENING (TYP.)

SCALE/ÉCHELLE: 1:10


0mm 100 200 300 400 500 600 700 800 900 1000mm



REMOVE EXISTING ROOFING SYSTEM IN LOCALIZED AREA OF HATCH.


POSSIBLE CURB - SOME LOCATIONS.

REINSTATE ROOFING SYSTEM TO MATCH EXISTING. (NOT SHOWN FOR CLARITY)

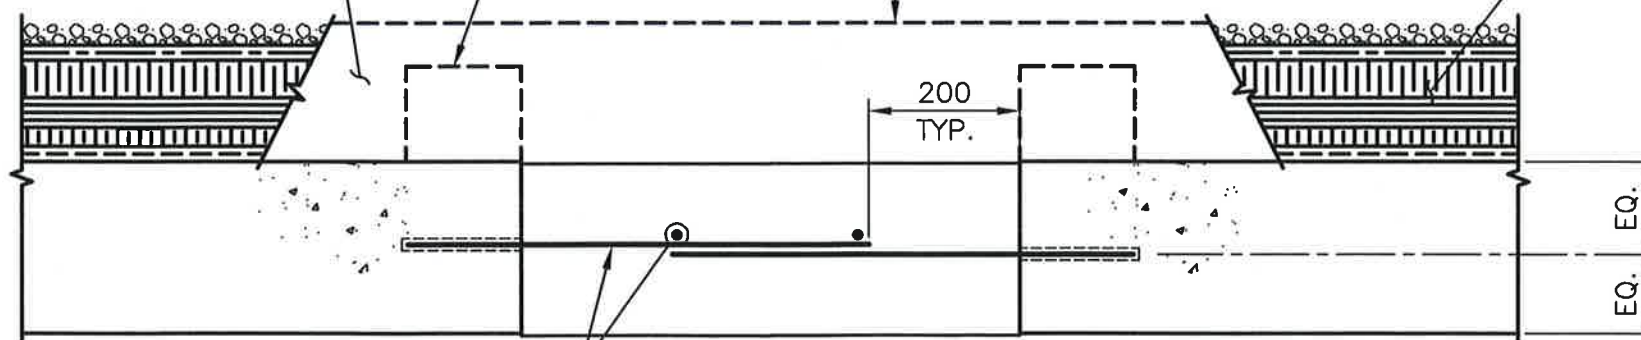

2-15M BARS - FOUR SIDES EMBED 150 INTO ANCHORAGE ADHESIVE-FILLED HOLES DRILLED INTO SIDES OF OPENING.

200
TYP.



EXISTING ROOFING SYSTEM SECTION

REINSTATEMENTS – EXISTING HATCH OPENING (TYP.)

SCALE/ÉCHELLE: 1:10

0mm 100 200 300 400 500 600 700 800 900 1000mm

