
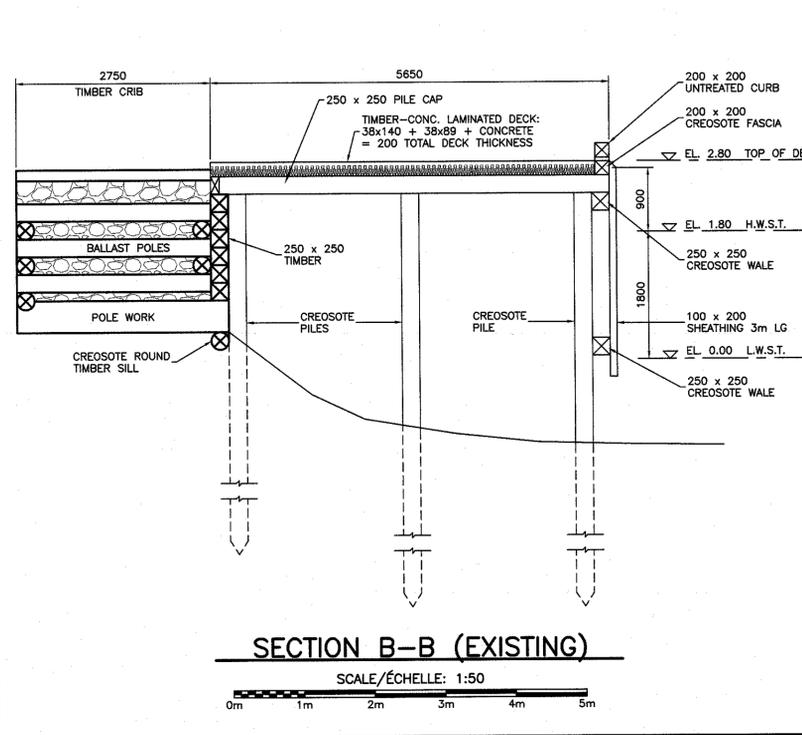


Public Works and Government Services Canada / Travaux Publics et Services gouvernementaux Canada

GAL Garg Associates Limited
Structural and Welding Consultants
Lokesh Garg, M.Sc., P.Eng.
President

3 Greenleaf Dr., Charlottetown
Prince Edward Island C1A 8E7
Phone: (902) 566-5456, Fax: (902) 566-3598
email: lokeshgarg201@gmail.com

LOCATION MAP
SCALE/ÉCHELLE: N.T.S.

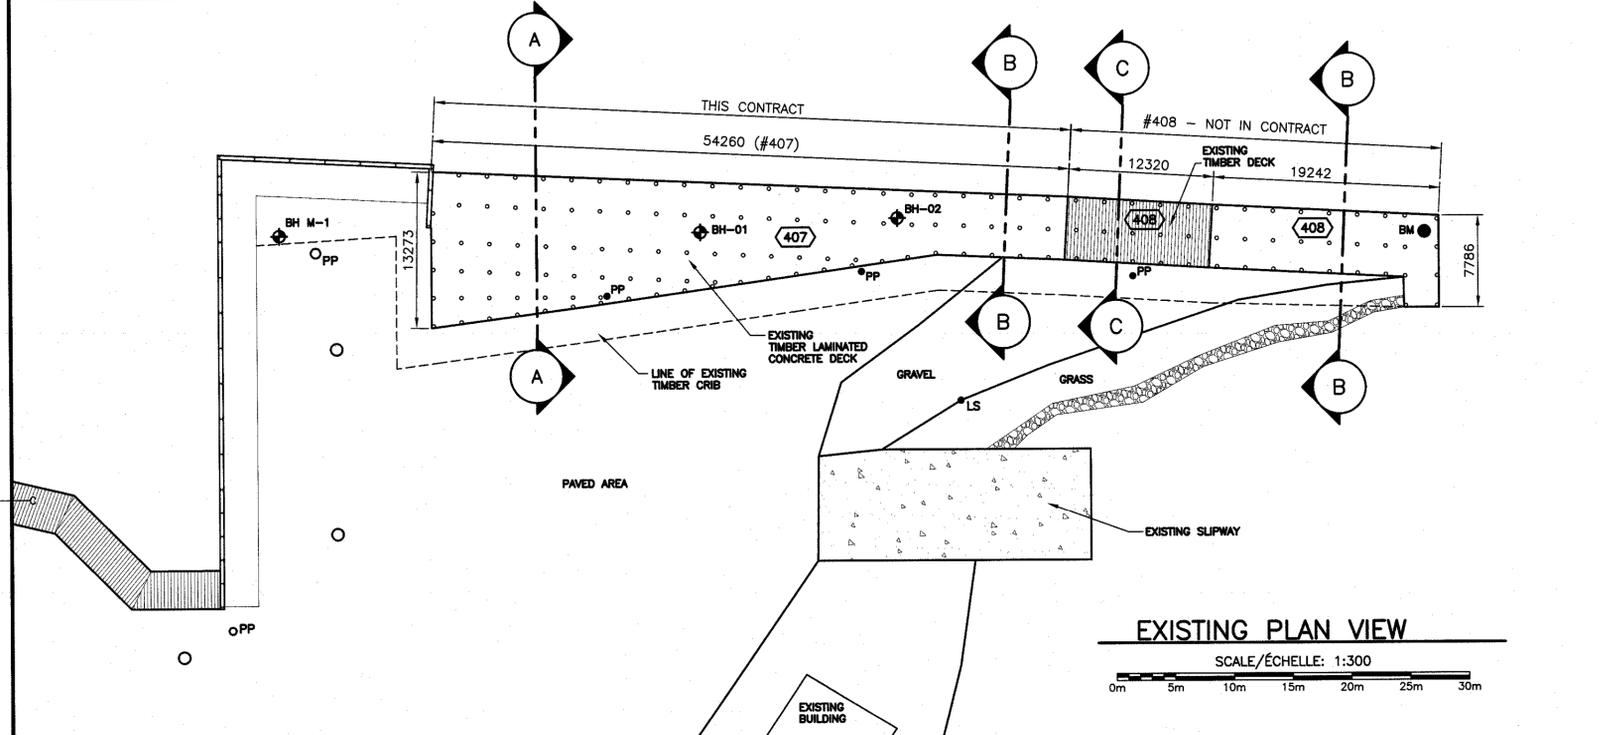

- GENERAL NOTES:**
- CONTRACTOR SHALL VISIT THE SITE TO FAMILIARIZE WITH THE SCOPE OF WORK AND EXISTING CONDITIONS BEFORE BIDDING ON THIS PROJECT.
 - INDICATIONS OF LOCATIONS AND DIMENSIONS OF ALL EXISTING STRUCTURAL ELEMENTS ARE APPROXIMATE ONLY. CONTRACTOR SHALL VERIFY ALL LOCATIONS AND DIMENSIONS ON SITE BEFORE COMMENCING WORK.
 - LOAD CARRYING ABILITY OF EXISTING STRUCTURE IS UNKNOWN. STRUCTURE IS NOT POSTED FOR LOADS AND PRESENTLY NOT SUITABLE FOR HEAVY CONSTRUCTION EQUIPMENT AND TRUCK LOADING. ONLY 1/2 TON PICK-UP TRUCK OR LIGHT VEHICLE IS ALLOWED.
 - BIDDERS ARE CAUTIONED THAT THIS WORK SURROUNDS EACH WORKS OF VARYING NATURE. EXISTING ROCK-BALLAST, CRIB TIMBER, ETC. MAY BE ENCOUNTERED DURING EXCAVATION. REMOVE ALL TIMBER, ETC. AND DISPOSE OFF SITE IN ACCORDANCE WITH PROVISIONS OF SPECIFICATION.
 - CONTRACTOR TO REMOVE AND REINSTATE UTILITIES AND SERVICES REQUIRED IN KEEPING WITH SERVICE PROVIDERS REQUIREMENTS.
 - ALL EXPOSED EDGES AND CORNERS OF CONCRETE WORK SHALL BE CHAMFERED 20mm x 20mm (TYP.).
 - IF THERE IS ANY DISCREPANCY BETWEEN SPECIFICATIONS AND DRAWINGS, THE MOST STRINGENT CLAUSE/CONDITION SHALL GOVERN.
 - ALL WELDING IN FIELD SHALL BE DONE BY CWB CERTIFIED WELDERS FOR ALL POSITIONS WELDING.
 - REMOVE FLUX/SLAG FROM ALL WELDS AND INSPECT THE WELD FOR QUALITY. FIX WELDS IF REQUIRED.
 - PATCH TO MATCH EXISTING WORK AND FIX SITE GRADING, ETC. IF DISTURBED DURING CONSTRUCTION.
 - ALL BOLTS, NUTS, WASHERS AND DRIFT PINS SHALL BE HOT DIPPED GALVANIZED 900 gm./sq. m.
 - EXCAVATION REQUIRED TO PLACE RIP RAP IS INCIDENTAL TO WORK ASSOCIATED AND NOT PAID SEPARATELY.

2	100% SUBMISSION	OCT. 14 2015
1	99% SUBMISSION	OCT. 08 2015
revisions		date

project project
WHARF RECONSTRUCTION 407 MONTAGUE KINGS COUNTY, PEI

drawing dessin
EXISTING CONDITIONS, BOREHOLE DATA & NOTES

designed L.G. conçu
date SEPT., 2015
drawn M.G.M. dessiné
date SEPT., 2015
approved [Signature] approuvé
date [Signature]
Tender [Signature] Submission
PWGSC Project Manager / Administrateur de projets TPSGC
project number no. du projet
R.076454.001
drawing no. no. du dessin
M1 OF 6

