



REVISIONS


NOTE: BEFORE COMMENCING WORK ON WINCH BRAKE ENSURE DAVIT ARMS ARE SECURED BY SAFETY PINS (IF APPLICABLE) AND THEN RELEASE TENSION ON FALLS BY RAISING BRAKE LEVER TO ITS LIMIT.

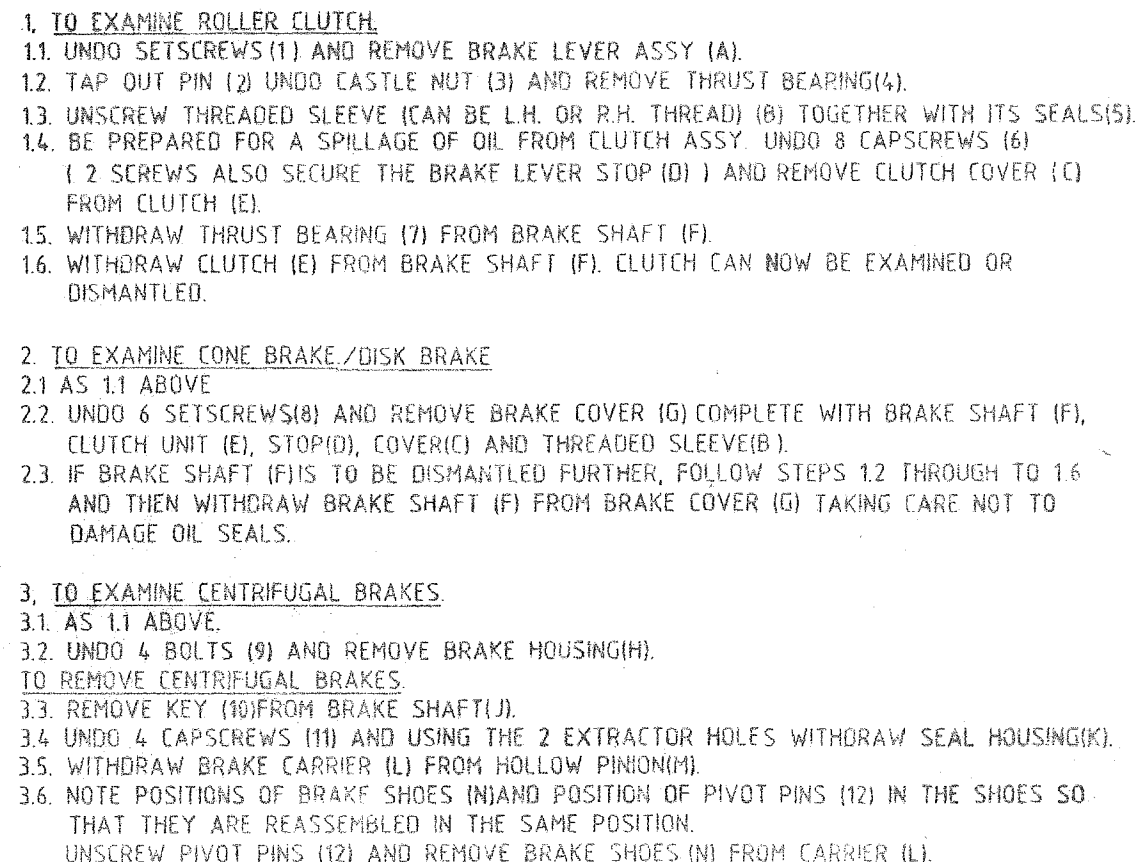


SECTION SHOWING CONE BRAKE

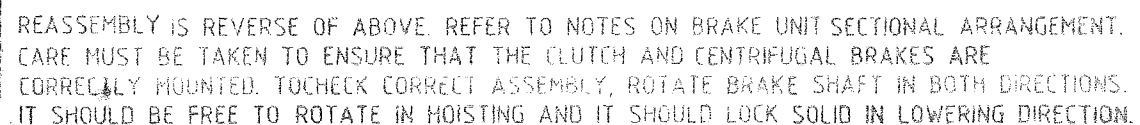

CLUTCH SHOULD BE REFILLED TO CORRECT LEVEL WITH OIL. SEE SECTIONAL ARRANGEMENT FOR DETAILS.





TYPICAL SECTION OF
BRAKE SHOES.
SHOWING BRAKES IN
TRAILING POSITION FOR
LOWERING IN ANTI C/WISE
DIRECTION.

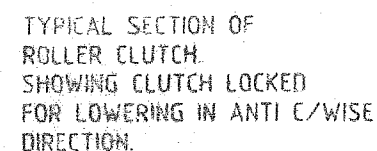

SCRAP SECTION SHOWING DISK BRAKE

This drawing is the copyright of the SCHAT GROUP and may not be reproduced, copied, xeroxed, photographed, altered or erased in any manner whatsoever without their specific written consent. All world copyrights reserved.

	SIGNATURE	DATE	 SCHAT DAVIT Co Ltd.				
PREPARED		13-07-88					
CHECKED			DISMANTLING INSTRUCTIONS FOR BRAKE UNIT.				
			S	710340			
			SCALE -				