


LEGEND





- MC MOORING CLEAT
- L LADDER
- PP POWER POLE
- PC POWER CENTRE
- O TIMBER FENDER PILE
- DECK DRAIN
- TIMBER SHEATHING
- ② PILE BENT
- A PILE ROW
- ④.10 FINISHED ELEVATION

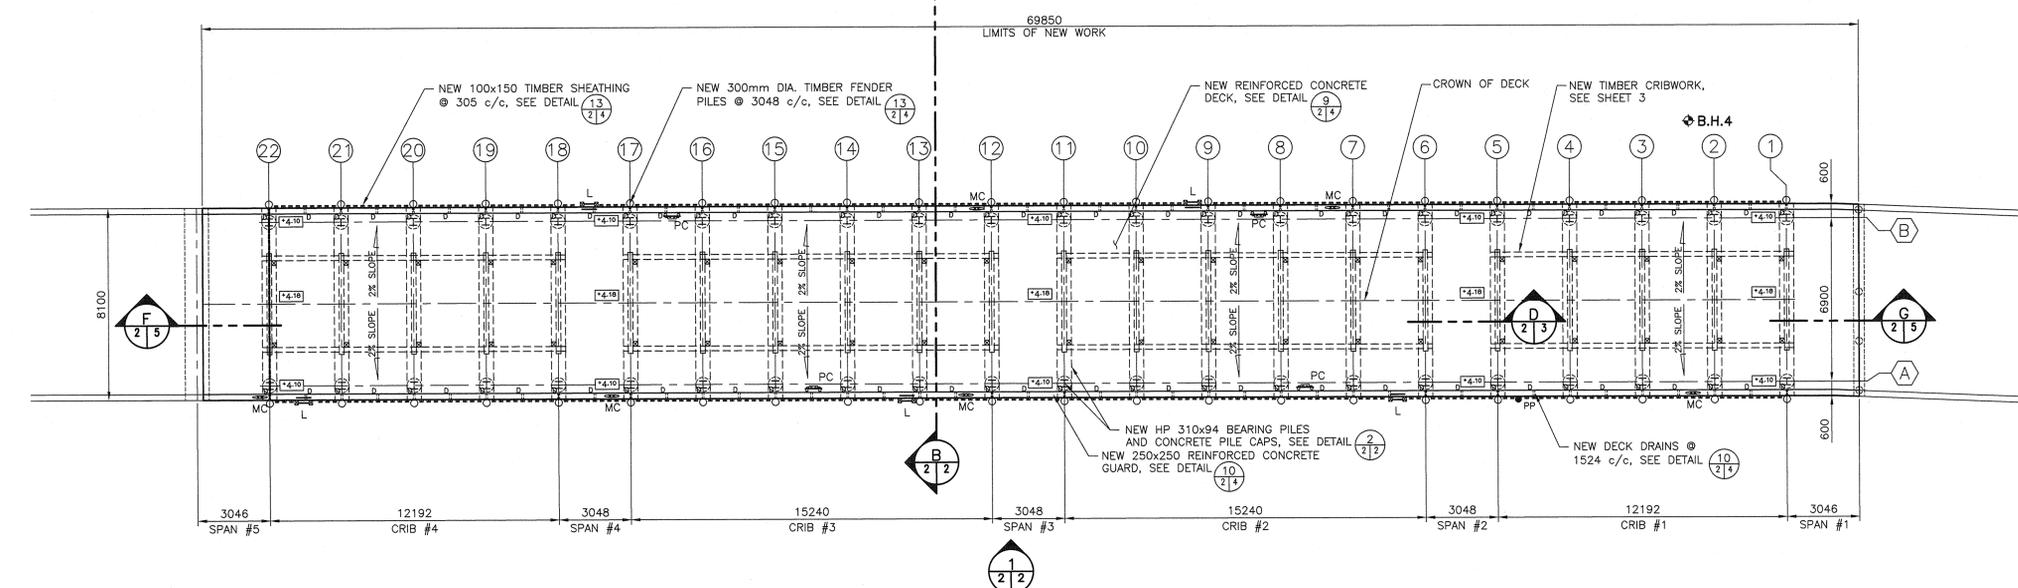

PILE SCHEDULE

PILE BENT	PILE ROW			
	SUPPLY LENGTH	ESTIMATED TIP ELEV.	SUPPLY LENGTH	ESTIMATED TIP ELEV.
1	9.15m	-5.0m	9.15m	-5.0m
2	9.15m	-5.0m	9.15m	-5.0m
3	9.15m	-5.0m	9.15m	-5.0m
4	9.15m	-5.0m	9.15m	-5.0m
5	9.15m	-5.0m	9.15m	-5.0m
6	9.15m	-5.0m	9.15m	-5.0m
7	9.15m	-5.0m	9.15m	-5.0m
8	9.15m	-5.0m	9.15m	-5.0m
9	9.15m	-5.0m	9.15m	-5.0m
10	9.15m	-5.0m	9.15m	-5.0m
11	9.15m	-5.0m	9.15m	-5.0m
12	9.15m	-5.0m	9.15m	-5.0m
13	9.15m	-5.0m	9.15m	-5.0m
14	9.15m	-5.0m	9.15m	-5.0m
15	9.15m	-5.0m	9.15m	-5.0m
16	9.15m	-5.0m	9.15m	-5.0m
17	9.15m	-5.0m	9.15m	-5.0m
18	9.15m	-5.0m	9.15m	-5.0m
19	9.15m	-5.0m	9.15m	-5.0m
20	9.15m	-5.0m	9.15m	-5.0m
21	9.15m	-5.0m	9.15m	-5.0m
22	9.15m	-5.0m	9.15m	-5.0m

*SUPPLY LENGTH INCLUDES 600mm CUT-OFF ALLOWANCE.

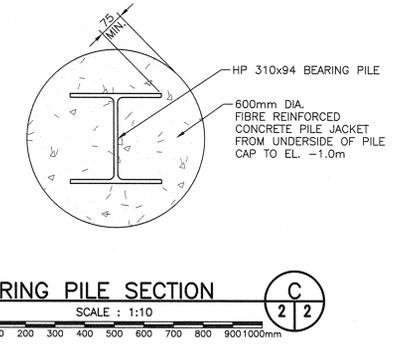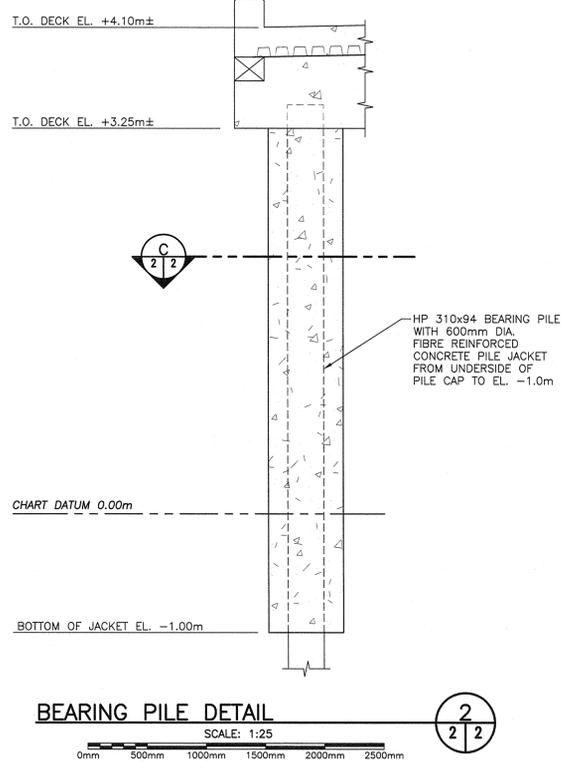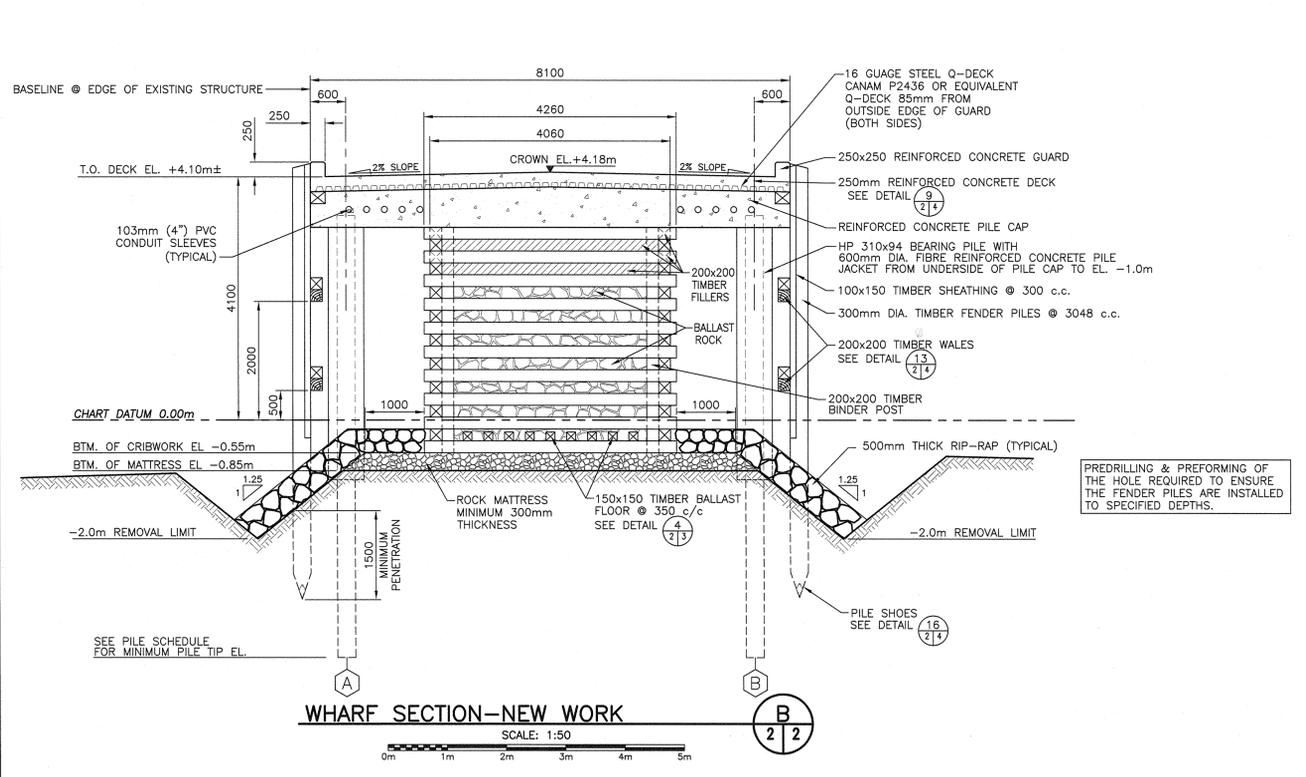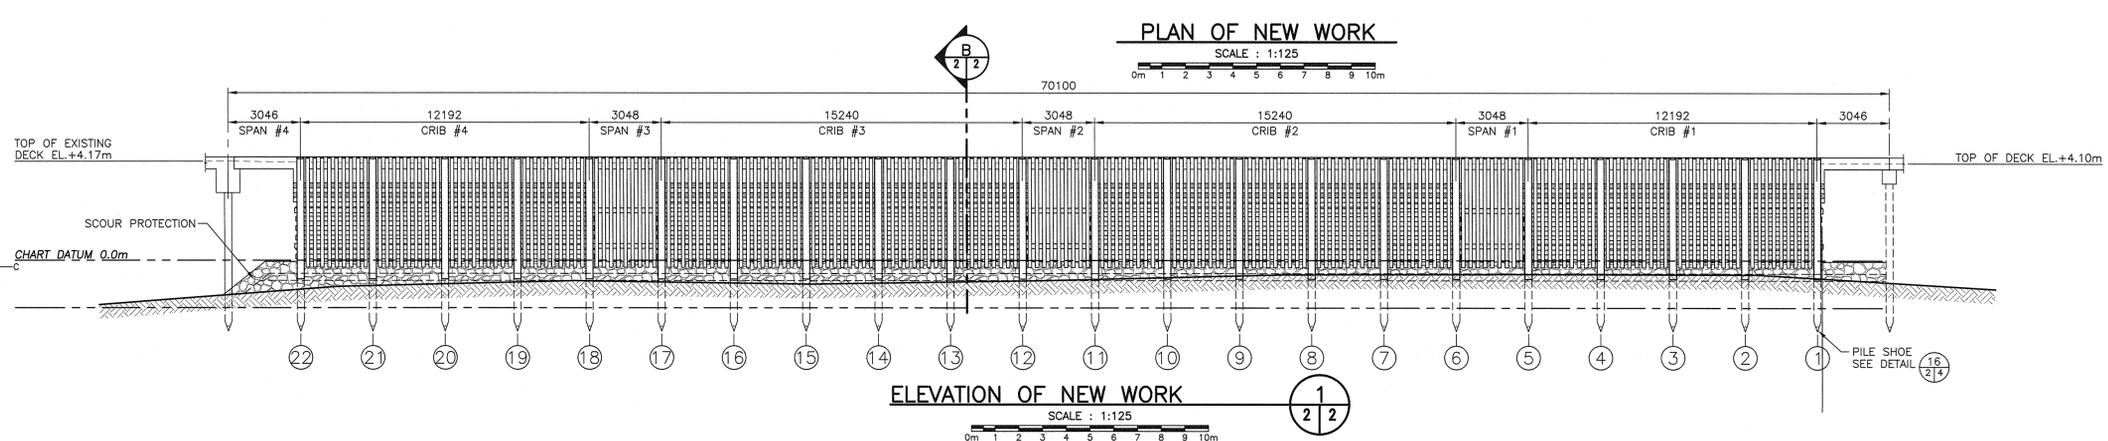

0	ISSUED FOR TENDER	JAN 2016
revisions		date
project	KENNEY WHARF RECONSTRUCTION PHASE 2 CLARK'S HARBOUR SHELburne CO., N.S.	
drawing	design	
designed	Terry Walsh	conçu
date	January 2016	
drawn	George Prosper	dessiné
date	January 2016	
approved	<i>[Signature]</i>	approuvé
date	16/04/16	
Tender	<i>[Signature]</i>	Soumission
PWOSC Project Manager	Administrateur de projets TPSGC	
project number	R.076658.001	
drawing no.	Sht 2 of 5	