
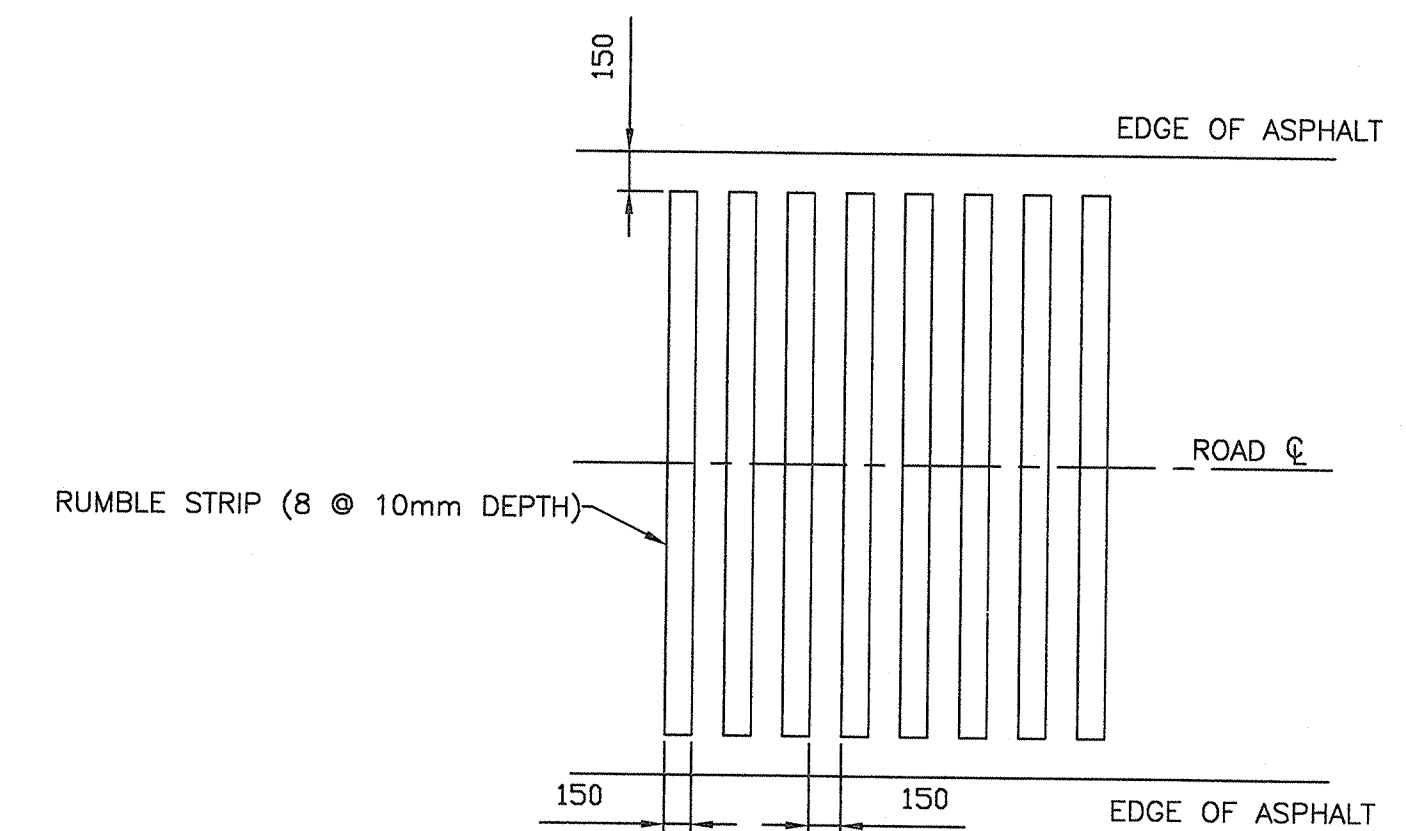
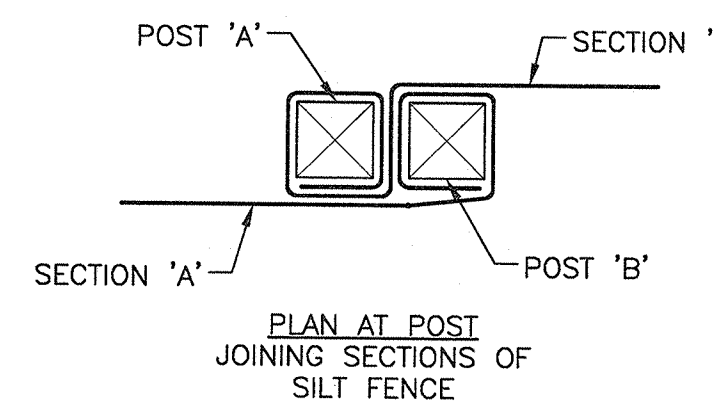


SILT FENCE INSTALLATION

1. EXCAVATE 150 x 150 TRENCH WHERE INDICATED.
2. UNROLL SILT FENCE ONE SECTION AT A TIME AND POSITION POSTS AGAINST THE DOWNSTREAM WALL OF THE TRENCH. REINFORCEMENT NETTING MUST BE ON THE DOWNSTREAM SIDE OF FLOW DIRECTION.
3. DRIVE POST INTO THE GROUND UNTIL THE REINFORCEMENT NETTING IS APPROXIMATELY 50mm FROM THE TRENCH BOTTOM.
4. LAY THE TOE-IN FLAP OF THE FABRIC IN THE BOTTOM OF THE TRENCH. BACKFILL THE TRENCH AND TAMP THE SOIL.
5. JOIN SILT FENCE SECTIONS AS SHOWN ABOVE.

SILT FENCE INSTALLATION (TYP.)

SCALE : N.T.S.

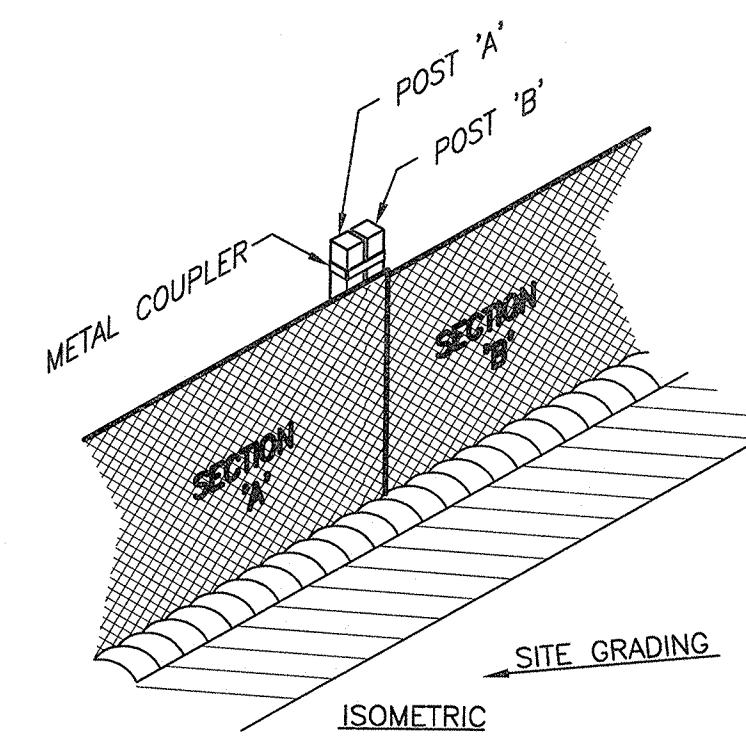

TEMPORARY RUMBLE STRIP DETAIL

SCALE : N.T.S.

PRIMARY ARMOUR:
2 LAYERS CL 2 RIPRAP (1000±)
UNDERLAYER:
2 LAYERS 18KG STONE (450±)
GEOTEXTILE:
300 SURGE ROCK

EXISTING CONCRETE SHOULDER

SCALE: 1:25

0mm 500mm 1000mm 1500mm 2000mm 2500mm

PLAN

SCALE: 1:500

0m 10m 20m 30m 40m 50m



NOTES:

1. SEE DRAWING C05 FOR ALL SIGN REMOVALS / RELOCATIONS. SIGNS ARE TO BE SALVAGED AND INSTALLED ON NEW POSTS.
2. ALL BEARINGS ARE REFERENCED TO THE 3' MODIFIED TRANSVERSE MERCATOR PROJECTION, ZONE 4, CENTRAL MERIDIAN 61° 30' WEST, ATS77 ELLIPSOID. POSITIONS AND GEODETIC ELEVATIONS REFER TO NOVA SCOTIA CONTROL COORDINATE MONUMENT SYSTEM, JULY 1, 1979 ADJUSTMENT, REFERENCE BASE MONUMENT 15636, USING GPS TECHNOLOGY.

NSCM: 15636
N: 5170758.470
E: 4583572.727
EL: 5.797m

NSCM: 15637
N: 5171450.166
E: 4583498.029
EL: 18.014m

- ASPHALT TO BE MILLED
- ASPHALT TO BE REMOVED
- CLEARING AND GRUBBING
- ITEMS TO BE REMOVED
- LINEAR REMOVALS
- SILT FENCE

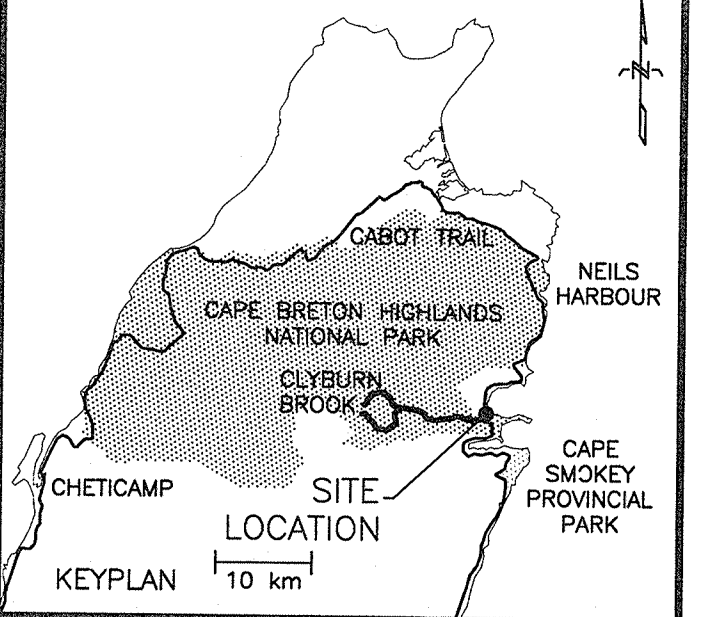

C01	ISSUED FOR TENDER	101
revisions		date

project **CLYBURN BROOK BRIDGE REPLACEMENT CAPE BRETON HIGHLANDS NATIONAL PARK, NS**

drawing **EXISTING SITE PLAN REMOVALS AND SEDIMENT CONTROL**

designed	conçu
date	
drawn	J.G. / D.B.
date	
approved	A.G.M.
date	
tender	2016-8-30
PWSC Project Manager	Administrateur de projets TPSCC
project number	R.072239.001
drawing no.	C01