



NOTE:
EXISTING CEILING TILE / CEILING TO BE REMOVED.

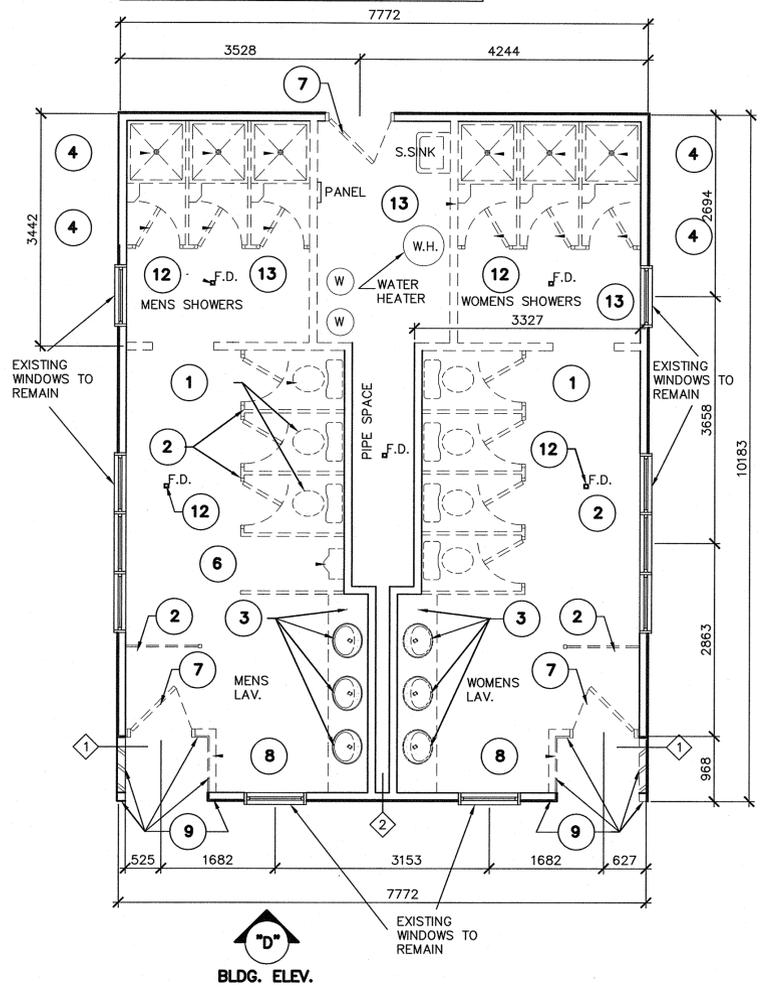

2 FLOOR PLAN BUILDING # 32 & 34 – EXISTING / DEMOLITION


SCALE: 1:50
0m 1m 2m 3m 4m 5m

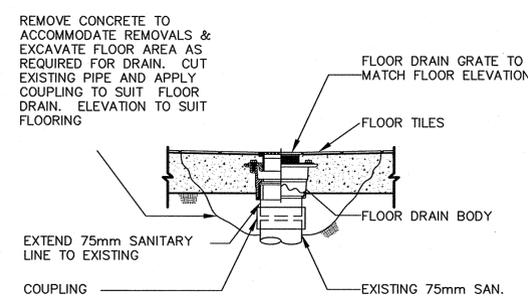

3 FLOOR DRAIN DETAIL

SCALE: 1:10
0m 200mm 400mm 600mm 800mm 1000mm

BLDG. ELEV.

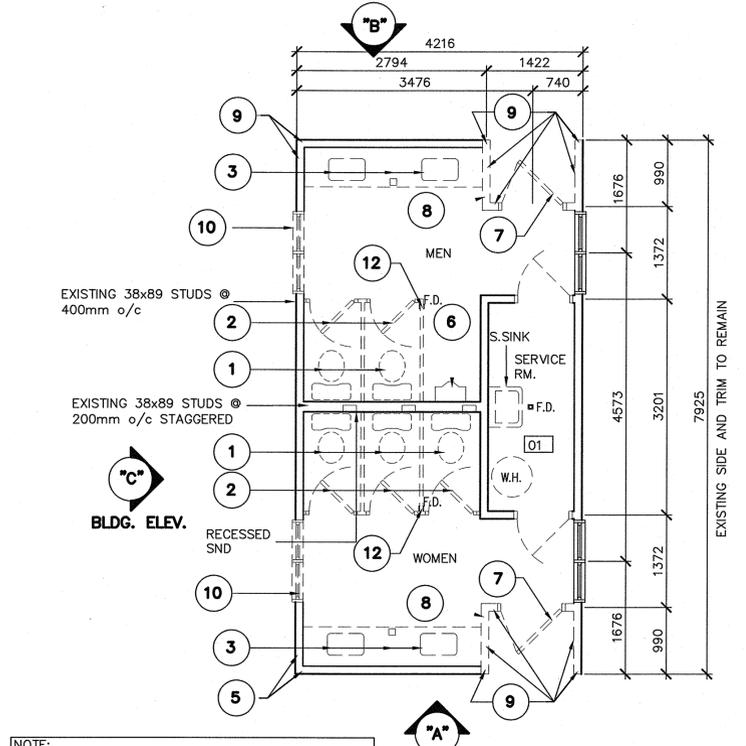

NOTE:
EXISTING CEILING TILE / CEILING TO BE REMOVED.

1 FLOOR PLAN BUILDING # 38 – EXISTING / DEMOLITION

SCALE: 1:50
0m 1m 2m 3m 4m 5m

DEMOLITION BY OTHERS

- 1 REMOVE EXISTING TOILET AND DISPOSE OFF SITE
- 2 REMOVE EXISTING TOILET STALLS AND DISPOSE OFF SITE
- 3 REMOVE EXISTING VANITY SINKS AND COUNTER AND DISPOSE OFF SITE
- 4 REMOVE EXISTING SHOWER UNITS AND STALLS AND DISPOSE OF SITE
- 5 REMOVE EXISTING WALL FINISHES TO ALLOW INSTALLATION OF NEW CONSTRUCTION

DEMOLITION INCLUDE THIS CONTRACT

- 6 REMOVE EXISTING URINAL C/W CONCRETE BASE AND DISPOSE OFF SITE SEE MECHANICAL FOR NEW FIXTURE TYPE
- 7 REMOVE EXISTING DOOR, FRAME AND HARDWARE AND DISPOSE OFF SITE SEE NEW CONSTRUCTION FOR DETAILS ON NEW DOOR
- 8 REMOVE EXISTING EXTERIOR WALL ASSEMBLY AND DISPOSE OFF SITE SEE NEW CONSTRUCTION FOR DETAILS ON NEW WALL CONSTRUCTION
- 9 REMOVE EXISTING EXTERIOR WALL SIDING AND TRIM AND TURN OVER TO OWNER FOR FUTURE USE. SEE NEW CONSTRUCTION FOR INSTALLATION OF NEW SIDING
- 10 REMOVE EXISTING WINDOW AND WALL AND INSTALL NEW 38 x 89 WOOD FRAMING TO CREATE NEW OPENING. SEE NEW CONSTRUCTION FOR SIZE
- 11 REMOVE EXISTING ASPHALT SHINGLES DOWN TO EXISTING ROOF SHEATHING. REPLACE ANY SHEATHING THAT DETERIORATED. SEE NEW CONSTRUCTION FOR DETAILS ON INSTALLATION OF NEW SHINGLES.
- 12 REMOVE EXISTING CONCRETE SLAB TO ALLOW REMOVAL OF EXISTING FLOOR DRAIN SEE MECHANICAL FOR NEW FLOOR TYPE SEE DETAIL 3/A-1.01 FOR MORE DETAILS
- 13 REMOVE EXISTING INTERIOR WALL ASSEMBLY AND DISPOSE OFF SITE SEE NEW CONSTRUCTION FOR DETAILS ON NEW WALL CONSTRUCTION

GENERAL NOTES:

1. ALL DIMENSIONS ARE APPROXIMATE AND ARE TO BE SITE VERIFIED. ALL DIMENSIONS ARE IN MILLIMETERS.
2. ALL EXISTING STRUCTURE DAMAGED / DISTURBED DURING DEMOLITION / CONSTRUCTION TO BE REPAIRED TO THE SATISFACTION OF PWSC.
3. OTHER CONTRACTS MAY BE LET DURING THE PERIOD THAT THIS CONTRACT IS IN PROGRESS. COOPERATE WITH OTHER CONTRACTORS IN CARRYING OUT RESPECTIVE WORKS AND CARRY OUT ALL INSTRUCTIONS FROM THE PWSC IN THIS REGARD. CONNECT PROPERLY AND COORDINATE WORK WITH THAT OF OTHER CONTRACTORS. IF ANY PART OF THE WORK UNDER THIS CONTRACT DEPENDS FOR ITS PROPER EXECUTION OR RESULT UPON THE WORK OF ANOTHER CONTRACTOR, REPORT PROMPTLY TO THE PWSC. IN WRITING, ANY DEFECTS IN THE WORK OF SUCH OTHER CONTRACTORS AS MAY INTERFERE WITH THE PROPER EXECUTION OF THIS WORK.
4. REMOVE EXISTING TILE FLOORS.
5. REMOVE EXISTING CONCRETE STEP @ URINALS.
6. MAKE GOOD CONCRETE FLOOR FROM DEMOLITION/EXCAVATION TO ACCEPT TILE FINISH.
7. INSTALL 75MM INTERIOR WOOD CASING (PAINTED) AROUND ALL WINDOW / VENTILATION PANEL OPENINGS.
8. INSTALL ALL APPLICABLE BLOCKING TO ACCOMMODATE FIXTURES, ACCESSORIES, WASHROOM PARTITIONS, CURTAIN TRACKS, AND MILLWORK.

LEGEND:

- EXISTING DOOR
- NEW DOOR / NUMBER
- EXISTING DOOR TO BE REMOVED
- ROOM NUMBER
- NOTE (REFER TO NOTES THIS SHEET ONLY)
- WALL TYPE REFERENCE
- HD ELECTRIC HAND DRYER
- SD SOAP DISPENSER
- M MIRROR
- CH COAT HOOK
- GB GRAB BAR
- SND SANITARY NAPKIN DISPOSAL
- TTD TOILET TISSUE DISPENSER
- WR WASTE RECEPTACLE (WALL MOUNT)
- GWB(PT) GYPSUM WALL BOARD "GREENBOARD" PAINTED
- FD FLOOR DRAIN
- WH HOT WATER TANK
- FS FOLDING SEAT
- BCS BABY CHANGE STATION

LEGEND

- CEILING MOUNTED FLOURESCENT LIGHT FIXTURE
- CEILING MOUNTED RECESSED FORCED FAN HEATER,
- CEILING MOUNTED INCANDESCENT LIGHT FIXTURE
- EMERGENCY LIGHTING BATTERY UNIT WITH TWO HEADS
- CEILING OR WALL MOUNTED EXIT LIGHT
- MOTION DETECTOR LIGHT SWITCH
- CEILING MOUNTED MOTION DETECTOR LIGHT SWITCH
- SINGLE OR DOUBLE HEADED EMERGENCY LIGHT

NOTES:

1. EXISTING VENTILATION PANEL TO BE PAINTED; COLOUR TO BE SELECTED.
2. WALL TYPE "A" THROUGHOUT. SEE FINISH SCHEDULE A04 (SERVICE ROOM NOT INCLUDED).
3. TILE FINISH NOT PRESENT IN THIS AREA.

Public Works and Government Services Canada / Travaux Publics et Services gouvernementaux Canada

Architects / Architectes

Consultants / Ingenieurs Conseils



PROVINCE OF Nfld.
PERMIT HOLDER
CLASS "A"
This Permit Allows
To practice Professional
Engineering in this
Province
Permit No. 2016

1.	ISSUED FOR TENDER	2016/03/04
revisions		date

project / projet
WASHROOM BUILDING RECAPITALIZATION BUILDING 32, 34, & 38 NEWMAN SOUND CAMPGROUND TERRA NOVA NATIONAL PARK, NL

drawing / dessin
DEMOLITION BUILDING #32,34 &38

designed / conçu	2015/3/23
drawn / dessiné	2015/3/23
approved / approuvé	2015/3/23

Tender / soumission
Ob. Durr 22 April 2016
PWSC Project Manager / Administrateur de projets TPSC
project number / no. du projet
R-079272-001
drawing no. / no. du dessin
A- 1.01