


NOTES:

- HANDING
- EACH INTERIOR DOOR (OTHER THAN CORRIDOR DOORS INTO STAIRWAYS) TO HAVE A NON-RATTLING HOLD BACK & A JAR HOOK. RUBBER FACED BUMPER TO BE PROVIDED TO PROTECT WALLS & FURNITURE.
- ALL DOORS FROM CORRIDOR INTO STAIRWAYS TO HAVE MAGNETIC HOLD BACKS. ACTIVATION OF FIRE ALARM SIGNAL SHALL RELEASE HOLD BACKS FROM WHEELHOUSE CONTROLS. NO HOLD BACK HOOKS TO BE FITTED.
- DOORS TO W.C. STALLS SHALL HAVE SPRING RETURN HINGES & ENGAGED/VACANT LATCHES IN CHROME PLATED BRASS FINISH.
- ALL A&B GLASS & FIRE DOORS SHALL BE OF AN APPROVED TYPE & SHALL BE CONSTRUCTED TO SPECIFICATIONS CONTAINED & TRANSPORT CANADA PUBLICATION - P434.

LEGEND:
A-WET-CLASS "A" WEATHERTIGHT DOORS OF APPROVED TYPE, DOORS OPENING INTO MAIN OR BOAT OR FORECASTLE DECKS FROM STORAGE OR ACCOMMODATION SPACES SHALL BE SHIP SAFETY APPROVED "A" CLASS DOORS. DOORS SHALL BE CONSTRUCTED OF STEEL WITH A SINGLE ACTING 6-DOG LOCKING MECHANISM ACTUATED BY WHEEL OR BY LEVER FROM BOTH SIDES. ALL DOORS SHALL HAVE A 500mm HIGH COMING, PORTLIGHTS SHALL BE FITTED AS REQUIRED ON THE LIST OF DOORS.
B-WET-CLASS "B" WEATHERTIGHT DOORS PROVIDING ACCESS TO THE WHEELHOUSE FROM THE BRIDGE DECK ARE TO BE SHIP SAFETY APPROVED "B" CLASS DOORS. DOORS SHALL BE CONSTRUCTED OF ALUMINUM IN A STEEL FRAME WITH STAINLESS STEEL HARDWARE & FITTINGS. DOORS SHALL BE TWO-DOG, SINGLE LEVER ACTUATED TYPE WITH MAXIMUM SIZE DOUBLE-GLAZED FIXED LIGHT (1x10mm & 1x5mm GLAZING) IN UPPER HALF.
TP-TOLLET STALL PARTITION TYPE DOOR
HSWT-HORIZONTAL SLIDING WATERTIGHT DOOR OF APPROVED TYPE
X=CHUBB, HALE OR OTHER SPECIAL LOCKS SHALL BE FITTED IN ADDITION TO THE ORDINARY LOCKS. NO LOCKS TO BE FITTED TO DOORS IN ESCAPE ROUTES.
ALL FIRE DOORS TO HAVE THE SAME FIRE RATING AS THE BULKHEAD TO WHICH THEY ARE FITTED.
SD = SCREEN DOOR






60 C WIND ENCLOSURE ACCESS 810 X 1372 600 L.H.R. A-WET W/250mm FIXED PORTLIGHT
60 D WIND ENCLOSURE ACCESS 660 X 1372 600 R.H.R. A-WET W/250mm FIXED PORTLIGHT

ITEM #	LOCATION	C/O SIZE	COMING	HANDING	TYPE	FEATURES
1	WHEELHOUSE - PORT	686 X 1830	150	L.H.R.	B-WET	FIXED DOUBLE GLAZED WINDOW
2	WHEELHOUSE - STBD	686 X 1830	150	R.H.R.	B-WET	FIXED DOUBLE GLAZED WINDOW
3	ACCUM. ENT. - PORT	660 X 1372	600	L.H.R.	A-WET	W/300mm FIXED PORTHOLE
4	STARWAY - PORT	660 X 1980	FLUSH	R.H.N.	AD	W/SELF CLOSER
5	AIR COND. EQUIP. PORT	660 X 1980	FLUSH	R.H.N.	AD	W/SELF CLOSER
6	DECK STOR. LKR. - PORT	660 X 1372	600	L.H.R.	A-WET	W/300mm FIXED PORTHOLE
7	LAV. - PORT	560 X 1830	150	R.H.N.	BO	W/LOCK
8	CHEF/MAN OFF. - PORT	660 X 1980	FLUSH	L.H.N.	BO	W/LOUVER VENT, KICKOUT PANEL & LOCK
9	LAV. ACCESS - PORT	560 X 1830	150	L.H.R.	BO	W/SELF CLOSER & LOUVER VENT
10	LAV. ACCESS - PORT	560 X 1830	150	L.H.R.	BO	W/SELF CLOSER & LOUVER VENT
11	CHIEF ENG. - PORT	660 X 1980	FLUSH	L.H.N.	BO	W/LOUVER VENT, KICKOUT PANEL & LOCK
14	COM. OFF. - STBD	660 X 1980	FLUSH	R.H.N.	BO	W/LOUVER VENT, KICKOUT PANEL & LOCK
15	LAV. ACCESS - STBD	560 X 1830	150	R.H.R.	BO	W/SELF CLOSER & LOUVER VENT
16	LAV. ACCESS - STBD	560 X 1830	150	R.H.R.	BO	W/SELF CLOSER & LOUVER VENT
17	SEA EFF. - STBD	660 X 1980	FLUSH	L.H.N.	BO	W/LOUVER VENT, KICKOUT PANEL & LOCK
18	LAV. ACCESS - STBD	560 X 1830	150	R.H.R.	BO	W/SELF CLOSER & LOUVER VENT
19	COM. OFF. - STBD	660 X 1980	FLUSH	R.H.N.	BO	W/LOUVER VENT & KICKOUT PANEL & LOCK
20	WHEELHOUSE ACCESS - STBD	660 X 1980	FLUSH	R.H.N.	AD	W/SELF CLOSER
21	ACCUM. ENT. - STBD	660 X 1372	600	R.H.R.	A-WET	W/300mm FIXED PORTHOLE & FIXED PORT LIGHT 250mm Ø
22	ELECTRONICS RM.	660 X 1830	150	L.H.N.	AD	W/SELF CLOSER

ITEM #	LOCATION	C/O SIZE	COMING	HANDING	TYPE	FEATURES
30	2-SEAMAN - PORT	680 X 1980	FLUSH	L.H.N.	BO	W/LOUVER VENT, KICKOUT PANEL & LOCK
31	1-WINCHMAN/1-SPARE - PORT	680 X 1980	FLUSH	L.H.N.	BO	W/LOUVER VENT, KICKOUT PANEL & LOCK
32	LOCKER - STBD	660 X 1980	FLUSH	R.H.R.	BO	W/SELF CLOSER & LOCK
34	LAV. ACCESS	600 X 1830	150	L.H.N.	BO	W/SELF CLOSER & LOUVER VENT
35	W.C. ACCESS	560 X 1372	FLUSH	L.H.N.	TP	
36	W.C. ACCESS	560 X 1372	FLUSH	R.H.N.	TP	
37	SHIP'S OFFICE - STBD	660 X 1980	FLUSH	R.H.N.	BO	W/LOUVER VENT, KICKOUT PANEL & LOCK
38	ENG. OFFICE - STBD	660 X 1980	FLUSH	L.H.N.	BO	W/LOUVER VENT, KICKOUT PANEL & LOCK
39	STEWARDS LOCK - PORT	600 X 1980	FLUSH	L.H.N.	AD	W/SELF CLOSER & LOCK
40	STARWAY - PORT	660 X 1980	FLUSH	R.H.N.	AD	W/SELF CLOSER
41	STARWAY - STBD	660 X 1980	FLUSH	L.H.N.	AD	W/SELF CLOSER
42	LOCKER - STBD	600 X 1980	FLUSH	R.H.R.	AD	W/SELF CLOSER & LOCK
43	STARWAY - STBD	600 X 1980	FLUSH	R.H.R.	AD	W/SELF CLOSER
44	STORE ACCESS - PORT	666 X 1830	150	R.H.N.	AD	W/SELF CLOSER & LOCK
46	2-CADETS - STBD	660 X 1980	FLUSH	R.H.N.	BO	W/LOUVER VENT, KICKOUT PANEL & LOCK
47	1 ST ENG. OFF. - STBD	660 X 1980	FLUSH	L.H.N.	BO	W/LOUVER VENT, KICKOUT PANEL & LOCK
48	LAV. ACCESS - STBD	560 X 1830	150	L.H.R.	BO	W/LOUVER VENT
49	LAV. ACCESS - STBD	560 X 1830	150	R.H.R.	BO	W/LOUVER VENT
50	2 ND ENG. OFF. - STBD	660 X 1980	FLUSH	R.H.N.	BO	W/LOUVER VENT, KICKOUT PANEL & LOCK
51	2 ND NAV. OFF. - STBD	660 X 1980	FLUSH	L.H.N.	BO	W/LOUVER VENT, KICKOUT PANEL & LOCK
52	LAV. ACCESS - STBD	560 X 1830	150	L.H.R.	BO	W/SELF CLOSER & SELF CLOSER
53	LAV. ACCESS - STBD	560 X 1830	150	R.H.R.	BO	W/SELF CLOSER & LOUVER VENT
54	2 ND NAV. OFF. - STBD	660 X 1980	FLUSH	L.H.N.	BO	W/LOUVER VENT, KICKOUT PANEL & LOCK
55	ACCUM. ENT. - STBD	660 X 1372	600	R.H.R.	A-WET	W/250mm FIXED PORTLIGHT

ITEM #	LOCATION	C/O SIZE	COMING	HANDING	TYPE	FEATURES
61	CENTRAL STAIR - PORT	680 X 1830	150	L.H.N.	AD	W/SELF CLOSER
62	CONFIRMATION W/AY - PORT	680 X 1980	FLUSH	L.H.R.	AD	W/SELF CLOSER
63	ENGINE RM. ACCESS - PORT	660 X 1830	150	R.H.R.	A60	W/SELF CLOSER, FLAME TIGHT A-60 IMO CLASS 250 X 250 CLEAR OPENING
64	STARWAY - PORT	660 X 1973	FLUSH	L.H.N.	AD	W/SELF CLOSER
65	STARWAY - PORT	640 X 1980	FLUSH	R.H.N.	AD	W/SELF CLOSER
66	OFF. MESS. & LOUNGE - PORT	660 X 1980	FLUSH	R.H.N.	BO	W/LOUVER VENT & KICKOUT PANEL
67	2-SEAMAN - PORT	660 X 1980	FLUSH	R.H.N.	BO	W/LOUVER VENT, KICKOUT PANEL & LOCK
68	1-2ND COOK/1 CLERK - PORT	660 X 1980	FLUSH	R.H.N.	BO	W/LOUVER VENT, KICKOUT PANEL & LOCK
69	2-SEAMAN - PORT	660 X 1980	FLUSH	R.H.N.	BO	W/LOUVER VENT, KICKOUT PANEL & LOCK
70	LOCKER - STBD	600 X 1980	FLUSH	L.H.R.	BO	W/LOUVER VENT & LOCK
71	FIRST AID LOCKER - PORT	600 X 1980	FLUSH	R.H.R.	BO	W/LOUVER VENT & LOCK
73	LAV. ACCESS - PORT	600 X 1830	150	L.H.N.	BO	W/SELF CLOSER & LOUVER VENT
74	W.C. ACCESS - PORT	560 X 1372	FLUSH	R.H.N.	TP	
75	GALLEY - PORT	660 X 1830	150	R.H.N.	AD	W/SELF CLOSER & LOCK
76	ESC - PORT	660 X 1980	FLUSH	L.H.R.	A60	W/SELF CLOSER
77	INCINERATOR RM. - STBD	660 X 1372	600	R.H.N.	A60	W/SELF CLOSER & FLAME TIGHT
78	STARWAY/GALLEY - STBD	660 X 1830	150	R.H.R.	AD	W/SELF CLOSER & LOCK
79	STARWAY - STBD	660 X 1980	FLUSH	L.H.R.	AD	W/SELF CLOSER
80	LAV. ACCESS - STBD	660 X 1830	150	L.H.N.	BO	W/LOUVER VENT
81	W.C. ACCESS	560 X 1372	FLUSH	L.H.N.	TP	
83	W.C. ACCESS - STBD	560 X 1372	FLUSH	L.H.N.	TP	
84	W.C. ACCESS - STBD	560 X 1372	FLUSH	R.H.N.	TP	
85	1-ER & 1-DAY WORKER - STBD	660 X 1980	FLUSH	L.H.N.	BO	W/LOUVER VENT, KICKOUT PANEL & LOCK
86	2-ER WATCH - STBD	660 X 1980	FLUSH	L.H.N.	BO	W/LOUVER VENT & KICKOUT PANEL
87	CREW MESS. & LOUNGE - STBD	660 X 1980	FLUSH	L.H.N.	BO	W/LOUVER VENT & KICKOUT PANEL
88	CANTEEN - STBD	660 X 1980	FLUSH	L.H.N.	BO	W/LOUVER VENT & KICKOUT PANEL & LOCK
89	GALLEY - STBD	660 X 1830	150	L.H.N.	AD	W/SELF CLOSER & LOCK
90	STARWAY - STBD	660 X 1973	FLUSH	L.H.R.	AD	W/SELF CLOSER
91	EMERG. GEN. RM. - STBD	600 X 1372	600	R.H.R.	A-WET	W/300mm FIXED PORTLIGHT
92	WORKSHOP - STBD	600 X 1372	600	R.H.R.	A-WET	W/300mm FIXED PORTLIGHT
93	QTR. MASTER STATION - STBD	660 X 1830	150	L.H.R.	B-WET	W/WINDOW 450 X 600mm

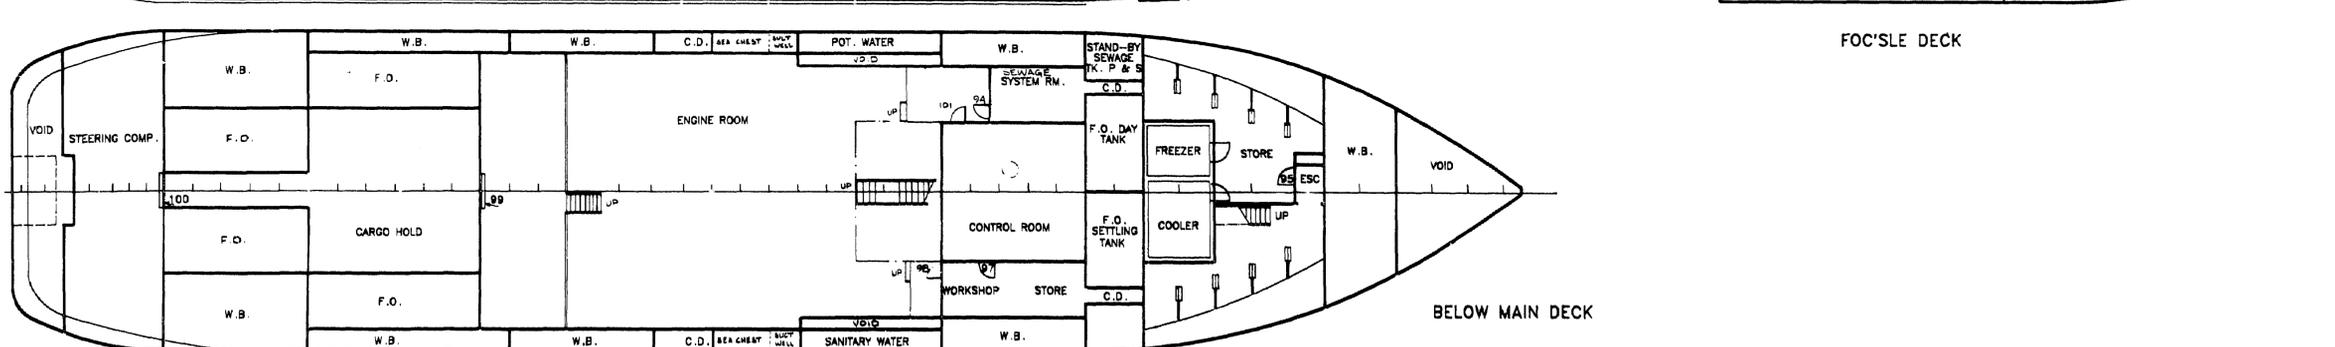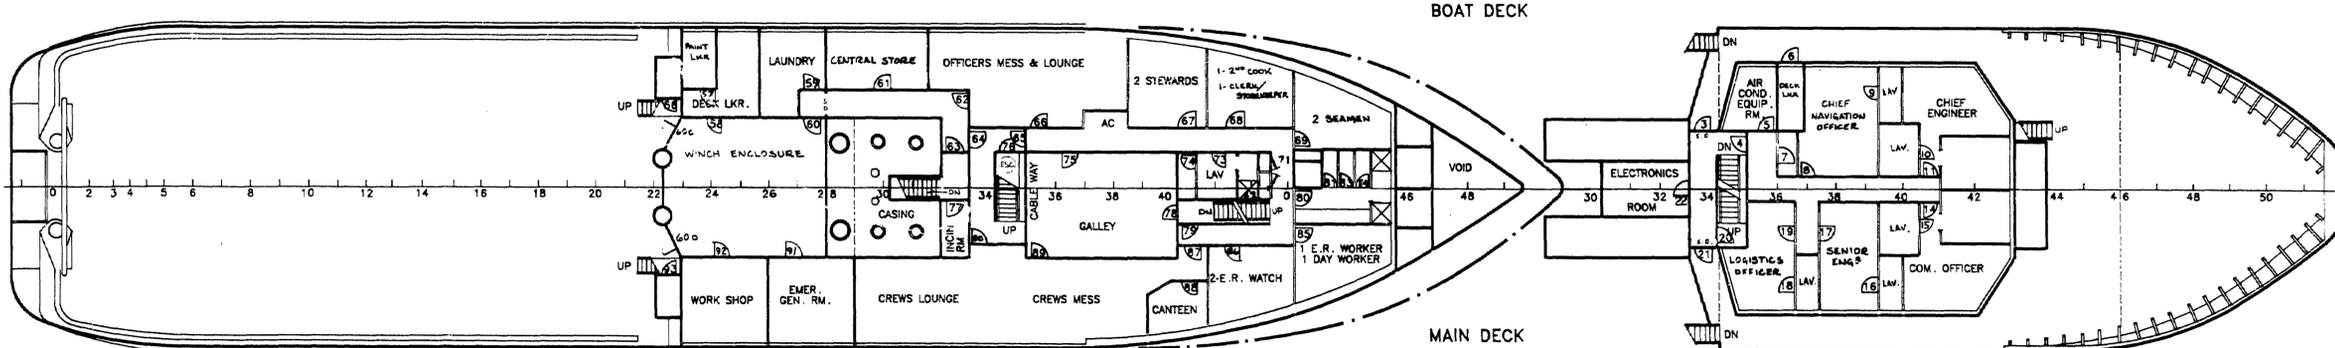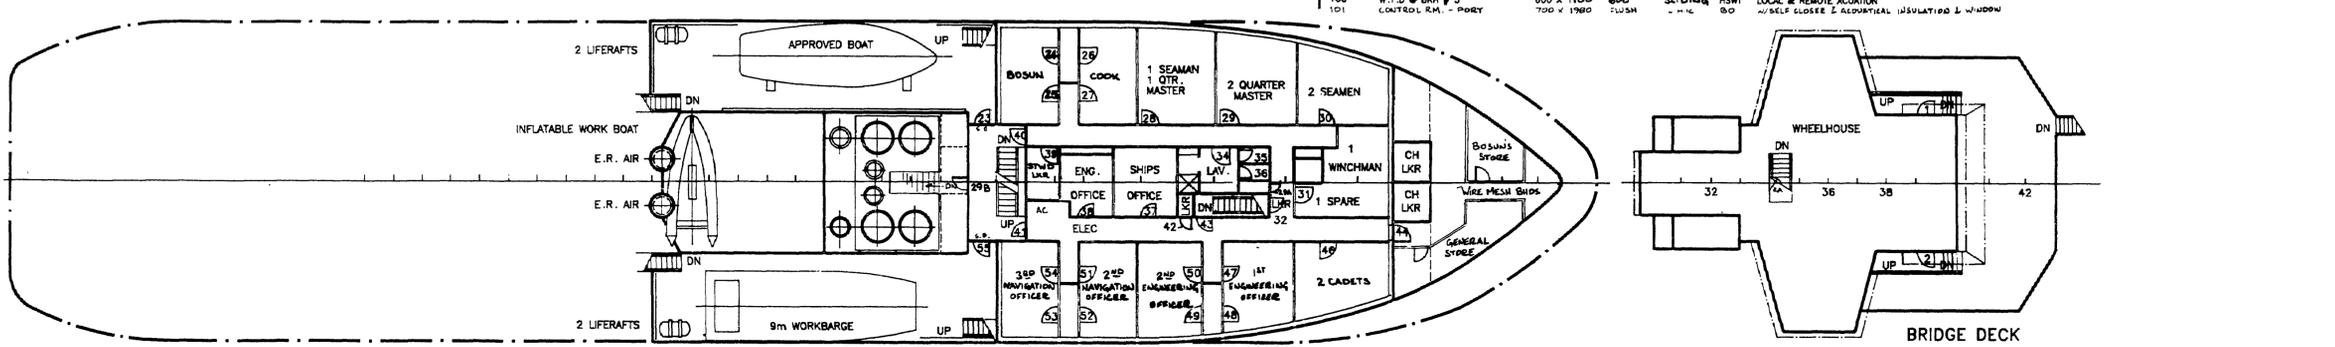

CGS30-117-MI

rev	description	by	date
0	REVISION TO DOOR SCHEDULE	SK	06-30-10
1	REVISION TO DOOR SCHEDULE	SK	07-13-10
2	CONVERTED TO CAD FORMAT	SK	08-11-10

drawing - design
date
05-14-80

checked - verify
date

approved - approve
date

reference - reference
scale - scale
1:100

drawing no. - no du dessin
sheet - feuille
CGS30-117-MI
2/2

CGS30-117-MI RASTER # 5300288